



AUSAVINA JSC
MATERIAL HANDLING SOLUTIONS



CATALOGUE

OUR CONTACT

Address: No. 944/1 Nguyen Thi Minh Khai Street,
Tan Thang Quarter, Tan Dong Hiep Ward,
Ho Chi Minh City, Vietnam.

Tel: (+84) 902 505 544

Office: (+84) 274 373 9448

Email: sales@ausavina.com




Scan QR Website



Material Handling Solutions for STONE & GLASS INDUSTRIES

Since 2009, AUSAVINA Joint Stock Company specializes in designing and manufacturing professional equipment for the STONE and GLASS industries

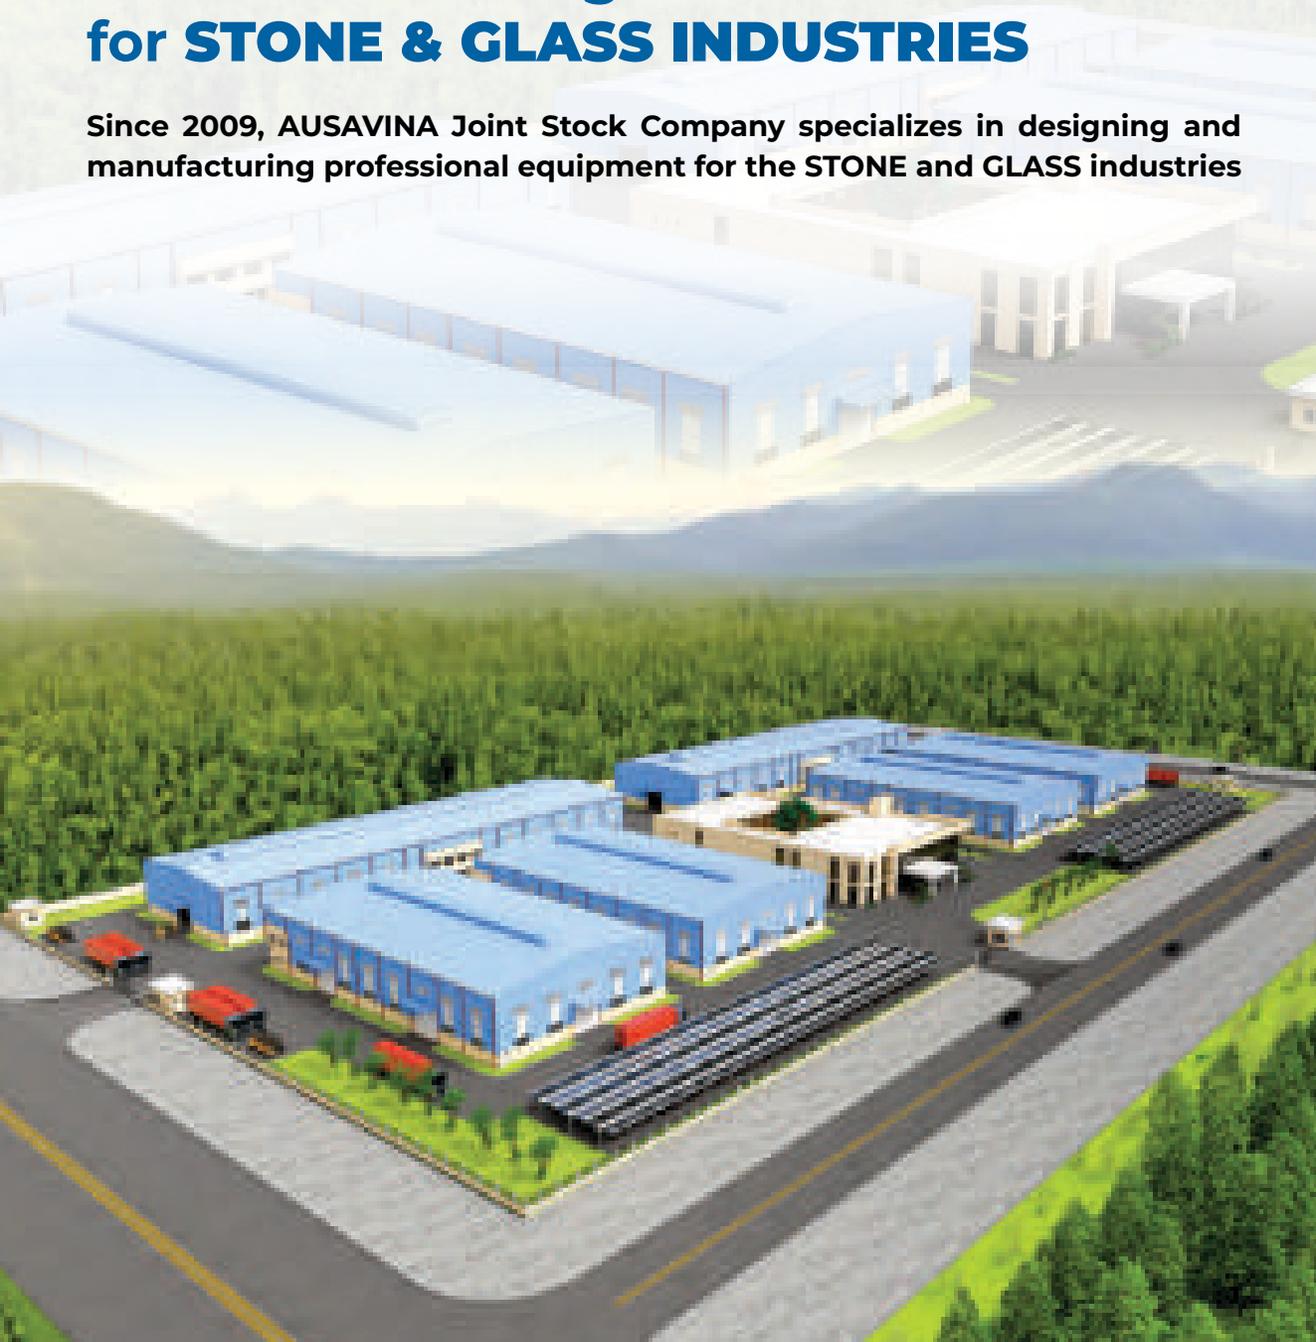

www.ausavina.com

ABOUT COMPANY



SOLUTIONS TO YOUR ACTUAL NEEDS

The Company track record shows their never-ending commitment to the best possible "Customer Satisfaction".

AUSAVINA people firmly believe the Valued Clients are the most important asset to the Company. That is why their dedication is strong and stable.

Products are distributed all over the world with a significant presence in Europe, Asia, Pacific Area.

AUSAVINA R&D team is always available to contribute finding the best reply to any professional request.



CUSTOMIZATION SERVICE



COLOR



DIMENSION



PROFESSIONAL
ENGINEERS



QUICK SAMPLE
DESIGN



GALVANIZED
OPTIONAL

- We provide customization service for products to meet diverse customer demands

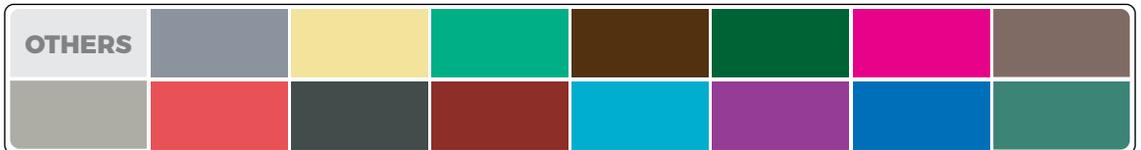


TABLE OF CONTENTS

01 Slab Lifting Clamps & Vacuum Cups

02 Forklift Attachments

03 Spreader Lifting Bars

04 Hand Transportation Clamps & Suction Cups

05 Countertop Tools-Equipment


06 Working Tables and Stands

07 Slab Transportation

08 Slab Storage A-Frames & Racks

09 Specialized Machinery

10 Accessories & Other

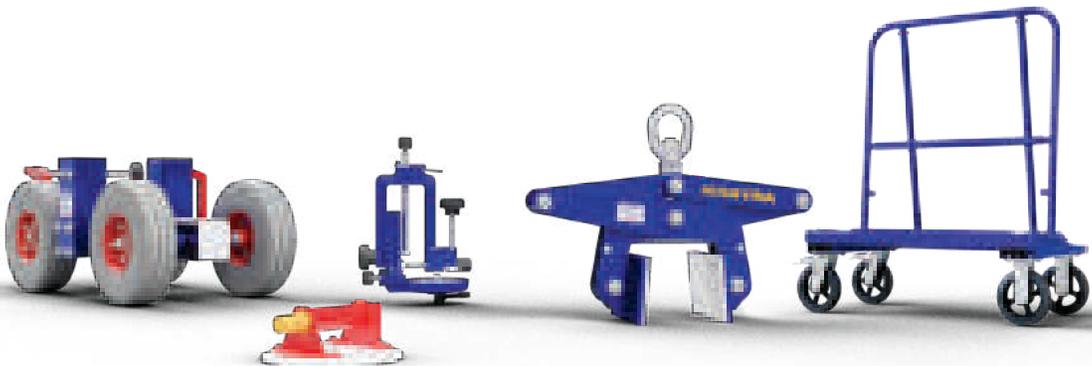

MATERIAL HANDLING SOLUTIONS

1. SLAB LIFTING CLAMPS & VACUUM CUPS PAGE

| | |
|--|-------|
| Ausavina Little Giant Lifter Automatic..... | 10 |
| Ausavina Little Giant Lifter..... | 11 |
| Ausavina Sky Rider Lifter Automatic..... | 12 |
| Ausavina Super Multi Material Lifter Automatic..... | 13 |
| Ausavina Bison Lifter..... | 14 |
| Ausavina Bison Lifter Automatic..... | 14 |
| Ausavina Falcon Lifter..... | 15 |
| Ausavina Falcon Lifter Automatic..... | 15 |
| Ausavina Stone Crab Lifter Automatic..... | 16 |
| Ausavina Scissor Clamp..... | 17-18 |
| Ausavina Barrier Heavy Lifter..... | 18 |
| Ausavina Multi Material Lifter Automatic..... | 19 |
| Ausavina Glass Lifter..... | 20 |
| Ausavina Pro-Glass Lifter..... | 20 |
| Ausavina Rotary Motor Shackle..... | 21 |
| Ausavina Mylift "Portable Electric Vacuum Lifter"..... | 22 |
| Ausavina Dual Pump Vacuum Lifter..... | 23 |
| Ausavina Vacuum Multilift Pro..... | 24-25 |
| Ausavina Qli Vacuum Lifter..... | 26 |
| Ausavina Stone Vacuum Lifter (SVL25)..... | 27 |
| Ausavina Stone Vacuum Lifter (SVL50)..... | 28 |
| Ausavina Stone Vacuum Lifter (SVL75)..... | 29 |
| Ausavina Stone Vacuum Lifter (SVL100)..... | 30 |
| Ausavina Multi Stone Vacuum Lifter..... | 31 |
| Ausavina Vacuum Lifter (DVL400)..... | 32 |
| Ausavina Vacuum Lifter (AVL480)..... | 33 |
| Ausavina Vacuum Lifter (DVL480)..... | 34 |
| Ausavina Vacuum Lifter (AVL500)..... | 35 |
| Ausavina Vacuum Lifter (DVL500)..... | 36 |
| Ausavina Vacuum Lifter (DVL1000)..... | 37 |
| Ausavina Vacuum Lifter (AVL600)..... | 38 |
| Ausavina Vacuum Lifter (CVL600)..... | 39 |
| Ausavina Rotary Vacuum Lifter..... | 40 |
| Ausavina Forklift Power Vacuum Lifter..... | 41 |
| Ausavina Manual Vacuum Grip Lifter..... | 42 |
| Ausavina Bag Gripper Automatic..... | 43 |
| Ausavina Round Material Lifter Automatic..... | 44 |



2. FORKLIFT ATTACHMENTS PAGE

| | |
|---|----|
| Ausavina Forklift Boom AFJ25-B..... | 45 |
| Ausavina Smart Forklift Boom ASFJ27..... | 45 |
| Ausavina Forklift Boom AFJ35..... | 46 |
| Ausavina Swing-Arm Forklift Boom..... | 46 |
| Ausavina Telescopic Forklift Boom..... | 47 |
| Ausavina Pivot Forklift Boom..... | 48 |
| Ausavina Tps Forklift Boom 3 In 1..... | 49 |
| Ausavina Container Bundle Slab Loader..... | 50 |
| Ausavina Container Bundle Slab Load - Unloader Pro..... | 51 |
| Ausavina Forklift Extensions..... | 52 |



MATERIAL HANDLING SOLUTIONS

3. SPREADER LIFTING BARS

PAGE

| | |
|-------------------------------------|----|
| Ausavina Spreader Bar M1..... | 53 |
| Ausavina Spreader Bar M4..... | 54 |
| Ausavina Spreader Bar M6..... | 54 |
| Ausavina Spreader Bar M7..... | 55 |
| Ausavina Spreader Bar M9..... | 55 |
| Ausavina Easy Adjustable Crane..... | 56 |



4. HAND TRANSPORTATION CLAMPS & SUCTION CUPS

PAGE

| | |
|--|----|
| Ausavina Single Handed Carry Clamps..... | 57 |
| Ausavina Double Handed Carry Clamps..... | 58 |
| Ausavina Double Handed Giant Carry Clamps..... | 58 |
| Ausavina Double Handed Carry Clamps..... | 59 |
| Ausavina Battery Multi Material Vacuum Suction Cup | 60 |
| Ausavina Hand Pump Vacuum Suction Cup | 61 |
| Ausavina Double /Triple Suction Lifter..... | 62 |



5. COUNTERTOP TOOLS-EQUIPMENT

PAGE

| | |
|---|----|
| Ausavina Ratchet Seam Setter M2..... | 62 |
| Ausavina Qli Seam Setter With Suction Cups..... | 63 |
| Ausavina Ez-pro Battery Seam Setter..... | 64 |
| Ausavina 90 Degree Pro Seam Setter..... | 65 |
| Ausavina 90 Degree Clamp..... | 66 |
| Ausavina Countertop Slab Saver..... | 67 |
| Ausavina Miter Fit Clamp..... | 68 |
| Ausavina Miter Set Clamp..... | 69 |
| Ausavina Sink Lock..... | 70 |



6. WORKING TABLES AND STANDS

PAGE


| | |
|--|----|
| Ausavina Power Kitchen Processing Table..... | 71 |
| Ausavina Power Kitchen Installation Cart..... | 72 |
| Ausavina Dual Polished Flip Table..... | 73 |
| Ausavina Tilt Glass Cutting Table..... | 74 |
| Ausavina Working Table..... | 74 |
| Ausavina Flexible Work Table..... | 75 |
| Ausavina Flexible Work Table - 4 Wheels..... | 75 |
| Ausavina Easy Adjustable Fabrication Stand/Seni..... | 76 |
| Ausavina Fabrication Stand..... | 77 |
| Ausavina Qli Foldable Table..... | 77 |
| Ausavina Edge Polishing Stand - Auto Lock..... | 78 |



7. SLAB TRANSPORTATION

PAGE


| | |
|--|---------|
| Ausavina Slab Dolly..... | 79 |
| Ausavina 3 Wheel Slab Dolly..... | 79 |
| Ausavina 3 Wheel Giant Dolly..... | 79 |
| Ausavina 4 Wheel Giant Dolly..... | 80 |
| Ausavina 4 Wheel Slab Dolly..... | 80 |
| Ausavina Self-Locking Trolley..... | 81-82 |
| Ausavina Safety Slab Dolly..... | 83 |
| Ausavina Self-Locking Dolly..... | 83 |
| Ausavina Tug Dolly..... | 84 |
| Ausavina Easy Moving Dolly..... | 85 |
| Ausavina Ez-Pro Winch Cart..... | 86 |
| Ausavina V-Cart..... | 87 |
| Ausavina Qli Drywall Cart 039..... | 87 |
| Ausavina Nesting Dual Drywall Cart 049..... | 88 |
| Ausavina Slab Rack Dolly..... | 89 |
| Ausavina Folding Trolley Frame..... | 89 |
| Ausavina Smart Slab Buggy..... | 90 |
| Ausavina Double Sided Slab Buggy..... | 91-92 |
| Ausavina Slab Buggy..... | 93 |
| Ausavina Qli Slab Buggy..... | 94 |
| Ausavina Qli Double Sided Slab Buggy..... | 94 |
| Ausavina Universal Slab Buggy..... | 95 |
| Ausavina Flexible Transport Cart..... | 96 |
| Ausavina Oversized Glass Transport Cart..... | 97 |
| Ausavina Heavy Duty Multi-Utility Transport Trailer..... | 98 |
| Ausavina Heavy Multi-Purpose Transport Trailer..... | 99 |
| Ausavina Flat Stacking Cart..... | 100 |
| Ausavina Nesting Single Sided Cart..... | 101 |
| Ausavina Heavy Duty Folding One Stop A-Frame..... | 102 |
| Ausavina Folding One-Stop A-Frame..... | 103-105 |
| Ausavina One Stop A-Frame..... | 106 |
| Ausavina Demountable Frame..... | 106 |
| Ausavina One Stop High A-Frame..... | 107 |
| Ausavina One Stop Single Sided A-Frame..... | 107 |
| Ausavina Smart One Stop A-Frame..... | 108 |
| Ausavina One Stop A-Frame Pro..... | 109 |
| Ausavina One Stop A-Frame..... | 110-111 |
| Ausavina Bi-Level A-Frame..... | 112 |
| Ausavina One Stop A-Frame..... | 113-114 |
| Ausavina Multi Adjustable Dropside Truck A-Frame..... | 115 |

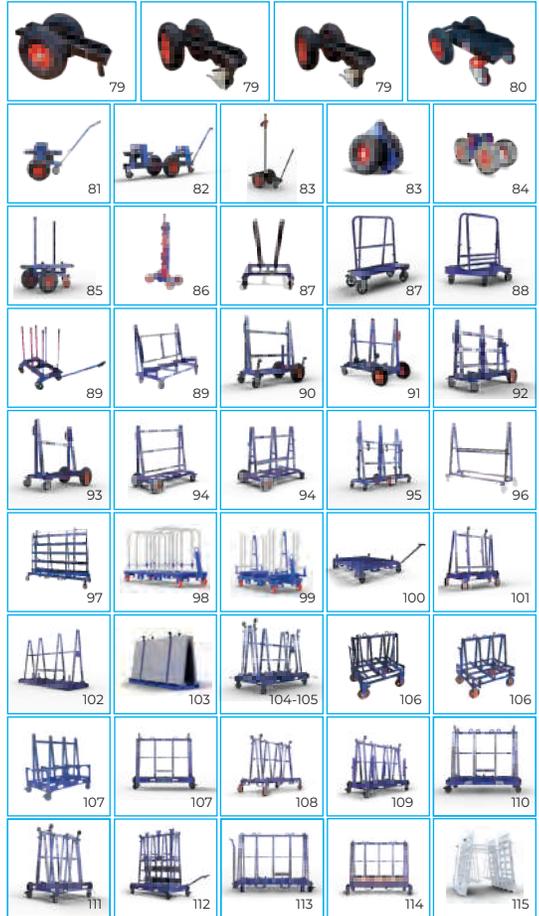

8. SLAB STORAGE A-FRAMES & RACKS

PAGE

| | |
|---|-----|
| Ausavina Heavy Duty Display Stand Rack..... | 116 |
| Ausavina Triple Side Folding Truck A-Frame..... | 117 |
| Ausavina Folding Adjustable Giant A-Frame..... | 118 |
| Ausavina Single Sided A-Frame..... | 119 |
| Ausavina Single Sided Truck A-Frame..... | 119 |
| Ausavina Standard A-Frame..... | 120 |
| Ausavina Truck A-Frame..... | 120 |
| Ausavina Heavy Duty Truck A-Frame..... | 121 |
| Ausavina Qli Truck A-Frame 060..... | 122 |
| Ausavina Qli Truck A-Frame Seni 060..... | 122 |
| Ausavina Qli Standard A-Frame 060..... | 123 |
| Ausavina Qli Truck A-Frame 074..... | 124 |
| Ausavina Qli Truck A-Frame Seni 074..... | 124 |
| Ausavina Qli Folding Truck A-Frame 060..... | 125 |
| Ausavina Qli Folding Truck A-Frame Juni/Seni 060..... | 125 |

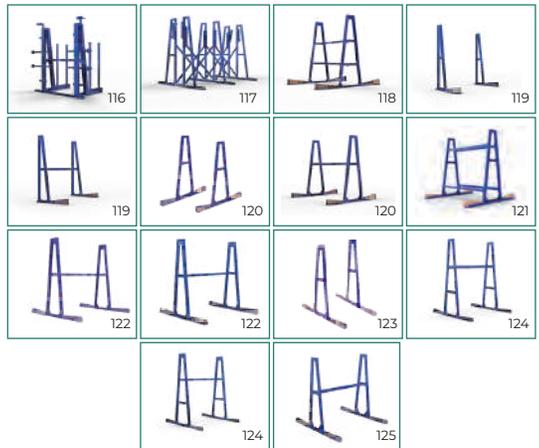

MATERIAL HANDLING SOLUTIONS

8. SLAB STORAGE A-FRAMES & RACKS

PAGE

| | |
|---|-----|
| Ausavina Qli Folding Truck A-Frame 074..... | 126 |
| Ausavina Qli Folding Truck A-Frame Seni/Juni 074..... | 126 |
| Ausavina Easy Load A-Frame..... | 127 |
| Ausavina Adjustable Giant Truck A-Frame..... | 128 |
| Ausavina Heavy Duty Single Side A-Frame..... | 129 |
| Ausavina Heavy Duty Double Side A-Frame..... | 130 |
| Ausavina Universal A-Frame..... | 131 |
| Ausavina Heavy-Duty Multi-Material Bundle Rack..... | 132 |
| Ausavina Bundle Slab Rack..... | 133 |
| Ausavina Slab Rack..... | 133 |
| Ausavina Qli Universal Bundle Slab Rack..... | 134 |
| Ausavina Rhino Slab Rack..... | 135 |
| Ausavina Qli Universal Slab Rack..... | 136 |
| Ausavina Remnant Slab Rack..... | 137 |
| Ausavina Spare Poles..... | 138 |



9. SPECIALIZED MACHINERY

PAGE

| | |
|--|-----|
| Ausavina Air Polishing Machine..... | 139 |
| Ausavina Stone Saw MODS1..... | 140 |
| Ausavina Stone Saw MODS2..... | 141 |
| Ausavina Rail Machine 5 In 1..... | 142 |
| Ausavina Column Articulate Crane (Jib Crane)..... | 143 |
| Ausavina Mortar Mixer..... | 143 |
| Ausavina Dehydrator (Sludge Filter)..... | 144 |
| Ausavina Collapsible Dumpster (Tilt Dumpster)..... | 145 |
| Ausavina Drop Bottom Dumpster..... | 146 |
| Ausavina Sludge Dehydrator Machine..... | 147 |



10. ACCESSORIES & OTHER

PAGE

| | |
|---|-----|
| Ausavina Ez-Pro Level Extender..... | 148 |
| Ausavina Bundle Securing Bar..... | 148 |
| Ausavina Drilling Guide M2..... | 149 |
| Ausavina Drilling Guide M3..... | 149 |
| Ausavina Multi Slab Safeguard Sling..... | 150 |
| Ausavina Safety Corner Slab Rack Wedge..... | 151 |
| Ausavina Slab Wedge..... | 151 |
| Ausavina Swivel Hook..... | 152 |
| Ausavina Swivel Shackle..... | 153 |
| Ausavina Cable Connect Sling..... | 153 |
| Ausavina Bow Shackle..... | 154 |
| Ausavina Stonemason Sleeves..... | 154 |
| Ausavina Stone Mason Apron..... | 154 |





AUSAVINA LITTLE GIANT LIFTER AUTOMATIC

- A new upgrading product designed to lift and move slabs in various workplaces.
- Provides an Opening and Closing mechanism of clamp plate with fully automatic ensures safety and convenience for users during operation.
- Suitable for natural and artificial stones with a grip range from 5 to 75 mm.
- Clamp Plates are covered by rubber pads to prevent from damage and scratches.




NOTE Swivel shackle included

- Available in Black (-B) and White (-W) rubber
- The lifter can combine with AMSS85 for transporting multi slabs at once safely and efficiently

AUTOMATIC

Patented auto lock mechanism

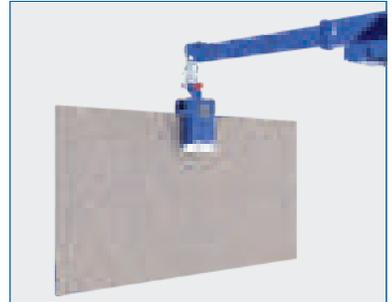


| Model | Length In (mm) | Width In (mm) | Height In (mm) | Grip Range In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|---------------|--------------------------------------|---------------------------------------|---------------------------------------|--|------------------------|-----------------------------|
| ALG40A | 8 ⁷ / ₁₆ (214) | 6 ¹³ / ₁₆ (173) | 15 ³ / ₁₆ (385) | ³ / ₁₆ ~ 1 ⁹ / ₁₆ (5 ~ 40) | 52.8 (24) | 2860 (1300) |
| ALG50A | 8 ⁷ / ₁₆ (214) | 7 ¹ / ₄ (184) | 15 ³ / ₁₆ (385) | ³ / ₈ ~ 1 ¹⁵ / ₁₆ (10 ~ 50) | 52.8 (24) | 2860 (1300) |
| ALG60A | 8 ⁷ / ₁₆ (214) | 8 ¹ / ₈ (206) | 16 ³ / ₄ (425) | ¹³ / ₁₆ ~ 2 ³ / ₈ (20 ~ 60) | 63.8 (29) | 3300 (1500) |
| ALG75A | 8 ⁷ / ₁₆ (214) | 8 ¹ / ₂ (216) | 16 ³ / ₄ (425) | 1 ³ / ₁₆ ~ 2 ¹⁵ / ₁₆ (30 ~ 75) | 64.9 (29.5) | 3300 (1500) |

AUSAVINA LITTLE GIANT LIFTER



- An ideal tool designed to lift and move slabs ensures safety and convenience for users during operation.
- Suitable for natural and artificial stones with a grip range from 10 to 75 mm.
- Clamp Plates are covered by rubber pads to prevent from damage and scratches.
- The smart clamping system provide effective and safe slab lifting.

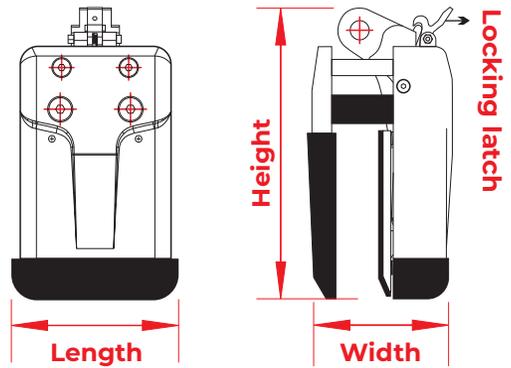

NOTE Swivel shackle included

- Available in Black (-B) and White (-W) rubber
- The lifter can combine with AMSS85 for transporting multi slabs at once safely and efficiently

ALG30

ALG50

ALG60, ALG75



VERSATILITY

The Ausavina Lifters are ideal for construction jobs. The clamping mechanism is located at the front of the slab, enabling close positioning of slabs against walls.



CONVENIENCE

The compact design enables smooth operation in confined spaces. To lift multiple slabs, always use Ausavina Multi Slab Safeguard Sling.



SAFETY

Intelligent and compact design provides maximum protection for users.

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Grip Range In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|-------|----------------|---------------|----------------|----------------------------|---------------------|--------------------------|
| ALG30 | 7 7/8 (200) | 5 11/16 (144) | 12 13/16 (326) | 3/8 ~ 1 3/16 (10 ~ 30) | 34.1 (15.5) | 2200 (1000) |
| ALG50 | 8 5/16 (211) | 7 3/16 (183) | 14 9/16 (370) | 3/8 ~ 1 15/16 (10 ~ 50) | 50.6 (23) | 2860 (1300) |
| ALG60 | 8 1/2 (216) | 7 15/16 (202) | 15 7/8 (403) | 13/16 ~ 2 3/8 (20 ~ 60) | 61.6 (28) | 3300 (1500) |
| ALG75 | 8 1/2 (216) | 8 7/16 (214) | 15 7/8 (403) | 1 3/16 ~ 2 15/16 (30 ~ 75) | 61.6 (28) | 3300 (1500) |



AUSAVINA SKY RIDER LIFTER AUTOMATIC

- Two models, two grip ranges, super large surfaces and natural rubber-coated clamp plate to easily/safely handle stone, granite, marble, porcelain slabs or glass sheets.
- Patented auto-lock mechanism and included swivel shackle allow 360° slab rotation.
- Mainly made of aluminum for lightweight and high durability purposes.



ASL20A



ASL30A



NOTE Swivel shackle included

- Available in Black (-B) and White (-W) rubber
- ASL30A can combine with AMSS85 for transporting multi slabs at once safely and efficiently

AUTOMATIC

Patented auto lock mechanism




AUTOMATIC

The Opening and Closing mechanism of clamp plate is fully automatic.



WIDE CLAMP PLATES

Improve gripping force and protect large fragile slab from damage and breakage.

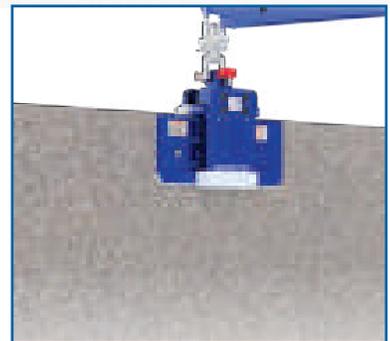

VERSATILE

Enhance grip on both natural and artificial stone slabs of various thicknesses.


| Model | Length In (mm) | Width In (mm) | Height In (mm) | Grip Range In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|---------------|-------------------|------------------|-------------------|-----------------------|------------------------|-----------------------------|
| ASL20A | 12 7/16 (316) | 4 13/16 (122) | 10 5/16 (262) | 0 ~ 13/16 (0 ~ 20) | 19.8 (9) | 1100 (500) |
| ASL30A | 19 5/16 (490) | 5 7/16 (138) | 13 3/16 (351) | 0 ~ 1 3/16 (0 ~ 30) | 59.4 (27) | 2200 (1000) |

- Designed to clamp, lift and move material slabs in various workplaces.
- Provides an Opening and Closing mechanism of clamp plate with fully automatic ensures safety and convenience for users during operation.
- Three models with different grip ranges and work load limit to handle various material slabs.
- Compact design with high-quality natural rubber pads to safely operate in narrow places.

NOTE Swivel shackle included (ASVL20A, ASVL30A-M2), Swivel Hook included (ASVL50A-M2)

- Available in Black (-B) and White (-W) rubber

- The lifter can combine with AMSS85 for transporting multi slabs at once safely and efficiently

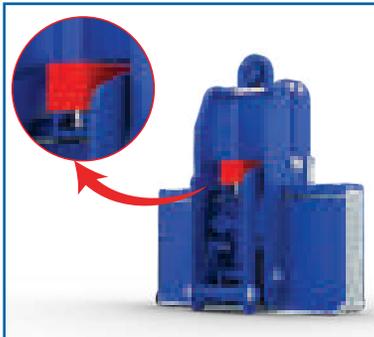

AUTOMATIC

Clamping mechanism for easy slabs lifting/lowering.



SAFE

Unique design with wider clamp plates to increase safety when carrying materials during operation.



FLEXIBLE

Flexible use for different material slabs such as stone, glass, porcelain and others.

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Grip Range In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|------------|----------------|---------------|----------------|----------------------|---------------------|--------------------------|
| ASVL20A | 9 13/16 (250) | 5 13/16 (147) | 12 13/16 (322) | 0 ~ 13/16 (0 ~ 20) | 19.8 (9) | 660 (300) |
| ASVL30A-M2 | 13 3/4 (350) | 5 13/16 (147) | 15 3/16 (386) | 0 ~ 1 3/16 (0 ~ 30) | 34.1 (15.5) | 1100 (500) |
| ASVL50A-M2 | 19 11/16 (500) | 7 5/16 (185) | 18 3/4 (477) | 0 ~ 1 15/16 (0 ~ 50) | 59.4 (27) | 1540 (700) |



AUSAVINA BISON LIFTER

- A heavy-duty lifter designed to lift and move stone slabs or other materials with a grip range up to 150 mm. Clamp Plates are covered by rubber pads to prevent damage and scratches during operation. A swivel shackle helps to rotate slab 360° easily. Two models includes:

* **ABL150 with smart clamping system**

* **ABL150A with PATENTED automatic clamping system**

AUSAVINA BISON LIFTER

ABL150



AUSAVINA BISON LIFTER AUTOMATIC

ABL150A




AUTOMATIC
Patented auto lock mechanism



NOTE Swivel shackle included

- Available in Black (-B) and White (-W) rubber

- The lifter can combine with AMSS160 for transporting multi slabs at once safely and efficiently

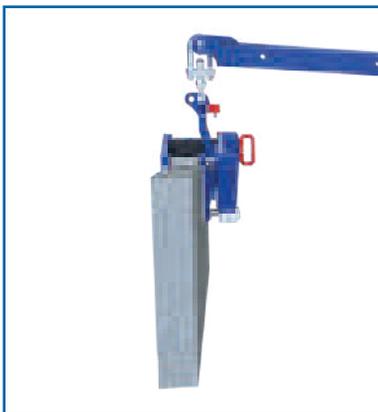

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Grip Range In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|---------|-------------------|------------------|-------------------|------------------------|------------------------|-----------------------------|
| ABL150 | 15 7/16 (392) | 8 3/4 (210) | 18 1/8 (459) | 3/16 ~ 5 7/8 (5~150) | 74.8 (34) | 3960 (1800) |
| ABL150A | 15 7/16 (392) | 8 3/4 (210) | 18 1/8 (459) | 3/16 ~ 5 7/8 (5 ~ 150) | 76 (34.5) | 3960 (1800) |


- The Ausavina Falcon Lifter is designed to lift and move stone slabs quickly and safely.
- The lifter is mainly made of steel for strength and durability in harsh environments.
- Two clamp plates are covered by rubber pads to protect the stone slabs during operation and transportation.
- The lifter can clamp many types of stone slab with different thickness from $1\frac{3}{16}$ " (20 mm) to $2\frac{9}{16}$ " (65mm).

NOTE Swivel shackle included

- Available in Black (-B) and White (-W) rubber
- The lifter can combine with AMSS85 for transporting multi slabs at once safely and efficiently

AUSAVINA FALCON LIFTER

AFL65

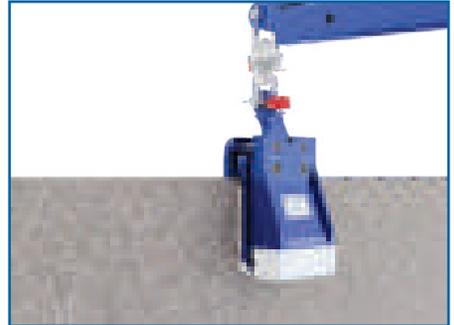


AUSAVINA FALCON LIFTER AUTOMATIC

AFL65A



AUTOMATIC
Patented auto lock mechanism

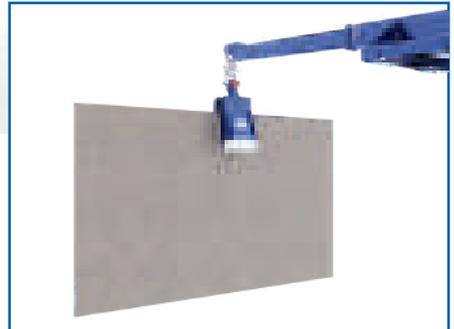

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Grip Range In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|---------------|-----------------------|------------------------|-------------------------|--|---------------------|--------------------------|
| AFL65 | 8 $\frac{7}{8}$ (226) | 8 $\frac{7}{16}$ (214) | 16 $\frac{3}{4}$ (426) | $1\frac{3}{16}$ ~ 2 $\frac{9}{16}$ (20 ~ 65) | 73.7 (33.5) | 2200 (1000) |
| AFL65A | 8 $\frac{7}{8}$ (226) | 8 $\frac{7}{16}$ (214) | 16 $\frac{3}{16}$ (411) | $1\frac{3}{16}$ ~ 2 $\frac{9}{16}$ (20 ~ 65) | 74.8 (34) | 2200 (1000) |



AUSAVINA STONE CRAB LIFTER AUTOMATIC

- A special design with durable structure to resist strong impact and ability to change grip range flexibly for easy slabs moving with different thicknesses.
- It features a swivel hook and a steel cable to make slab operations easy.



NOTE Available in Black (-B) and White (-W) rubber



| Model | Length In (mm) | Width In (mm) | Height In (mm) | Grip Range In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|---------|-------------------|------------------|-------------------|--------------------------|------------------------|-----------------------------|
| ASCL50A | 8 9/16 (217) | 7 5/8 (194) | 22 1/4 (565) | 9/16 ~ 1 15/16 (15 ~ 50) | 56.1 (25.5) | 2640 (1200) |

- Ausavina Scissor Clamp is an invaluable tool for lifting slabs, barriers, curbs, median walls and tombstones. The jaws of the lifter are covered with long-lasting and fully vulcanized natural rubber pads to ensure safe and non-marking grip.

SC100AL-M2: Clamps are gravity-controlled, open automatically in idle conditions and close when lifted.





| Model | Length In (mm) | Width In (mm) | Height In (mm) | Grip Range In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|------------|-------------------|------------------|-------------------|----------------------------|------------------------|-----------------------------|
| SC100 | 21 5/16 (542) | 7 1/16 (180) | 15 3/4 (400) | 3/8 ~ 3 15/16 (10 ~ 100) | 47.3 (21.5) | 2860 (1300) |
| SC100AL-M2 | 21 5/16 (542) | 7 1/16 (180) | 15 3/4 (400) | 3/8 ~ 3 15/16 (10 ~ 100) | 47.3 (21.5) | 2860 (1300) |
| SC150 | 23 3/4 (590) | 9 13/16 (250) | 18 1/16 (458) | 1 3/16 ~ 5 7/8 (30 ~ 150) | 77 (35) | 3300 (1500) |
| SC350 | 22 5/8 (575) | 9 13/16 (250) | 20 13/16 (528) | 5 7/8 ~ 13 3/4 (150 ~ 350) | 112.2 (51) | 3520 (1600) |
| SC400 | 27 15/16 (710) | 9 13/16 (250) | 20 1/2 (520) | 7 7/8 ~ 15 3/4 (200 ~ 400) | 114.4 (52) | 2420 (1100) |



AUSAVINA SCISSOR CLAMP

- Scissor Clamp is an invaluable lifting equipment for slabs, barriers, curbs, median walls and tombs stones.

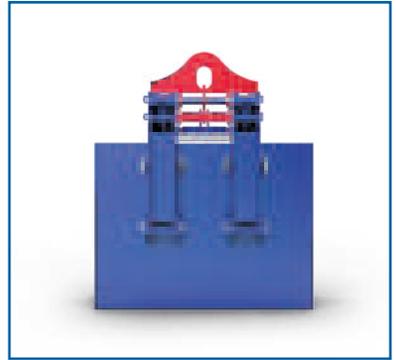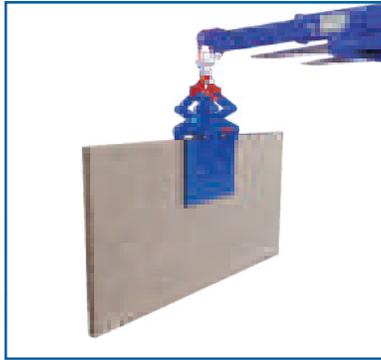

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Grip Range In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|-------|-------------------|------------------|-------------------|-----------------------------------|------------------------|-----------------------------|
| SC300 | 31 1/2 (800) | 21 9/16 (548) | 39 1/4 (997) | 3 15/16 ~ 11 13/16 (100 ~ 300) | 479.6 (218) | 3520 (1600) |

AUSAVINA BARRIER HEAVY LIFTER

- Ausavina Barrier Heavy Lifter (ABHL3200) is an ideal solution to safely lift, move, lower big size barriers, slabs, blocks made of stone. Vulcanized rubber and extended clamp plates protect material from damage and increase gripping force during clamping. This lifter operates with gravity-controlled mechanism, automatically opening when idle and closing when lifted.


BIG LOAD: The work load limit is up to 7040 lbs (3200 kg).

NOTE Swivel shackle included

- Available in Black (-B) and White (-W) rubber



Auto open - lock
mechanism



| Model | Length In (mm) | Width In (mm) | Height In (mm) | Grip Range In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|----------|-------------------|------------------|-------------------|-----------------------------------|------------------------|-----------------------------|
| ABHL3200 | 27 9/16 (700) | 33 3/16 (843) | 26 1/4 (667) | 3 15/16 ~ 11 13/16 (100 ~ 300) | 358.6 (163) | 7040 (3200) |

AUSAVINA MULTI MATERIAL LIFTER AUTOMATIC


- Ausavina Multi Material Lifter Automatic is mainly designed to clamp and lift the material slabs.
- Clamping mechanism is fully automatic.
- The large surface of clamp plates is covered by rubber to prevent damage when moving in any direction.
- Two guide shafts ensure precise lifter positioning, while the wheel system enables smooth movement and secures the slab between the clamping jaws.

Note: Swivel shackle included




APL20

APL20-M2

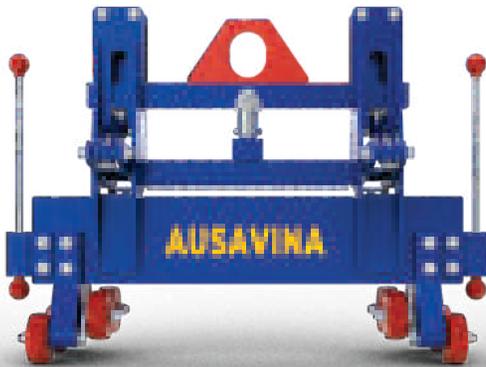

PATENTED AUTOMATIC LOCKING MECHANISM

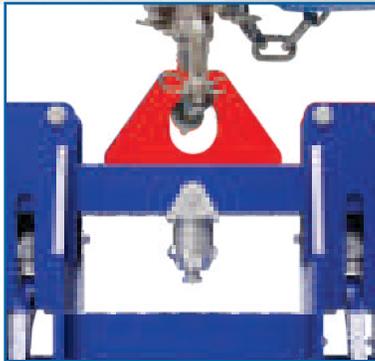


AUTOMATIC CLAMP

The clamping mechanism is fully automatic.



SAFE RUBBER PAD

The contact surface of lifter is covered by rubber pads to prevent damage or crack when lifting.

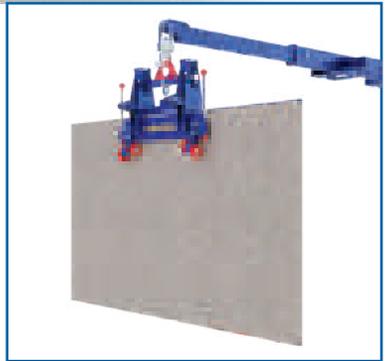

GUIDE SHAFT

Two guide shafts lead the lifter into the correct position.


| Model | Length In (mm) | Width In (mm) | Height In (mm) | Grip Range In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|-----------------|----------------|---------------|----------------|-----------------------|---------------------|--------------------------|
| APL20 | 30 11/16 (780) | 10 7/16 (265) | 22 1/4 (565) | 3/16 ~ 13/16 (4 ~ 20) | 51.7 (23.5) | 660 (300) |
| APL20-M2 | 21 3/8 (536) | 6 15/16 (176) | 16 11/16 (424) | 0 ~ 13/16 (0 ~ 20) | 25.3 (11.5) | 880 (400) |

AUSAVINA GLASS LIFTER

- No electricity or compressed air is required, as the grip and release operations are fully automatic and mechanically controlled.
- Ausavina Glass Lifter is designed to safely and securely handle glass sheets.
- The fully automatic clamps with an extended grip surface minimize labor requirement.
- Two guide shafts ensure precise lifter positioning, while the wheel system enables smooth movement and secures the slab between the clamping jaws.
- The vulcanized rubber on the clamp provides additional grip and extra protection for handling the glass.
- Compact design for easy storage and transportation.

AUSAVINA GLASS LIFTER


AGL28

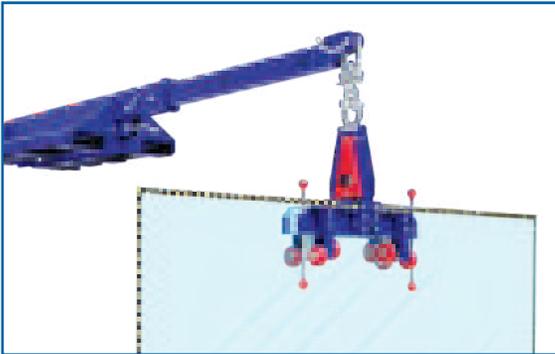

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Grip Range In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|--------------|-------------------|------------------|-------------------|-----------------------|------------------------|-----------------------------|
| AGL28 | 23 3/16 (598) | 8 9/16 (218) | 25 3/16 (640) | 3/16 ~ 1 1/8 (4 ~ 28) | 63.8 (29) | 1760 (800) |

AUSAVINA PRO-GLASS LIFTER

APGL40

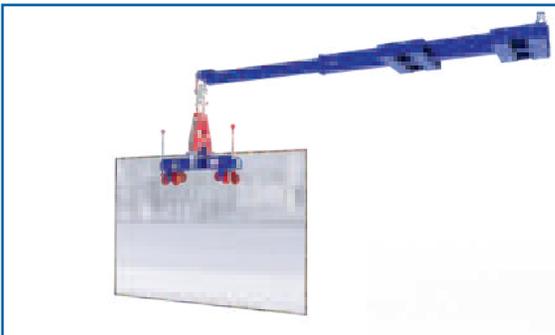

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Grip Range In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|---------------|-------------------|------------------|-------------------|------------------------|------------------------|-----------------------------|
| APGL40 | 29 3/16 (738) | 9 7/16 (240) | 26 7/8 (683) | 3/16 ~ 1 9/16 (4 ~ 40) | 79.2 (36) | 3080 (1400) |

AUSAVINA ROTARY MOTOR SHACKLE

- Engineered for seamless integration with Ausavina stone and glass lifters, forklifts or hoists, this solution excels in slab transportation.
- The wireless remote control allows operators to safely lift, rotate and position slabs directly from the forklift - enhancing both efficiency and worksite safety.



360-DEGREE ROTATABLE

360-degree rotation enables precise adjustment in any desired orientation.



CONVENIENT

The user-friendly battery system and level indicator enhance control and convenience.



SECURE

Remote operation from the forklift keeps the operator securely away from the danger zone.

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Battery Powered | Work Load Limit lbs (kg) |
|----------|-------------------|------------------|-------------------|------------------------|--------------------|-----------------------------|
| ARMS1200 | 9 1/16 (231) | 7 1/16 (180) | 17 3/4 (450) | 34.1 (15.5) | 24V, 10Ah | 2640 (1200) |



AUSAVINA MYLIFT “PORTABLE ELECTRIC VACUUM LIFTER”

- Portable Electric Vacuum Lifter is a hand-held tool designed to lift and move small and medium-sized sheets of material in workshops or construction sites.



| FEATURES | PVL100 | PVL100PRO |
|---|--------|-----------|
| WIDE APPLICATION: Use for variety of surface materials. | ✓ | ✓ |
| HAND PUMP MODE: Alternative mode when battery run out. | ✓ | ✓ |
| WARNING SYSTEM: An audible-visual alarm system provides safety during lifting and moving material. | ✗ | ✓ |
| AUTOMATIC MECHANISM: The vacuum is activated and re-pump automatically. | ✗ | ✓ |



| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|------------------|-------------------|------------------|-------------------|------------------------|-----------------------------|
| PVL100 | 11 5/8 (295) | 6 1/2 (165) | 4 15/16 (126) | 3.74 (1.7) | 220 (100) |
| PVL100PRO | 11 5/8 (295) | 6 1/2 (165) | 4 15/16 (126) | 3.96 (1.8) | 220 (100) |

AUSAVINA DUAL PUMP VACUUM LIFTER

- Ausavina Dual Pump Vacuum Lifter (ADPVL250) is designed for lifting / lowering and transporting stone slabs within the allowable work load limit. It is typically combined with a hoist to lift stone slabs onto a working table or to move them within a warehouse or workshop.
- The standout feature of the ADPVL250 is its dual operation: it can utilize compressed air - if available in the workshop - to generate suction, or it can operate manually using the built-in hand pump.
- The suction force is consistently maintained throughout the working process.
- The suction cups are made of soft rubber, enhancing adhesion to the stone slab while preventing contact damage.
- To avoid operation under low pressure, a dual audio-visual alarm system is integrated for added safety.
- The compact design ensures easy transport and storage.




WARNING SYSTEM

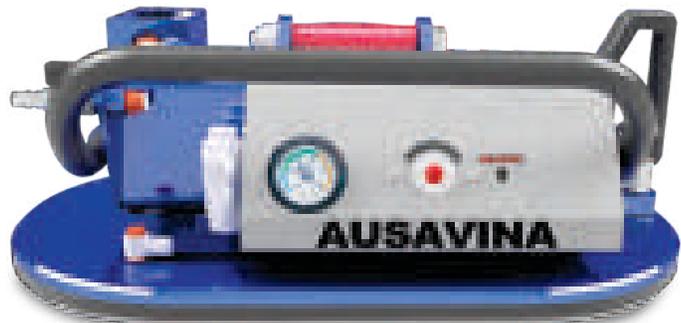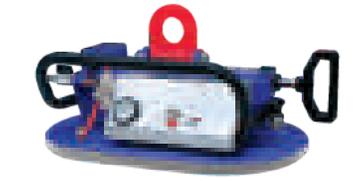
Hand pump **Available air connector**

Connect to a compressed air connector or use a hand pump to create a vacuum.



A detachable suction cup with a rail line allows easy integration with the pneumatic components.



Designed for lifting/lowering and transporting stone slabs or other non-porous materials within the allowable work load limit.

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|----------|-------------------|------------------|-------------------|------------------------|-----------------------------|
| ADPVL250 | 21 1/16 (534) | 11 5/16 (287) | 7 5/16 (186) | 44 (20) | 550 (250) |

AUSAVINA VACUUM MULTILIFT PRO

- A portable lifter enables effortless transportation of materials across various work environments.
- Ausavina Vacuum Multilift Pro is designed to lift material slabs safely and efficiently, handling loads of up to 550 lbs (250 kg).




| | | |
|---|---|--|
| | <p>Control and warning systems help to operate more safely</p> | |
| <p>CONVENIENCE</p> | <p>SAFETY</p> | <p>HIGH PROTECTION</p> |
| <p>The compact design allows for easy packaging and transport. Its ergonomic handle provides a comfortable grip, ensuring smooth and efficient operation.</p> | <p>Equipped with an LED light and alarm system that alerts the user when pressure drops, ensuring safer and more efficient operation.</p> | <p>The soft rubber suction cup enhances adhesion between the stone slab and the cup while protecting the slabs from scratches.</p> |

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Battery | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|---------|----------------|---------------|----------------|---------|---------------------|--------------------------|
| AVMP250 | 15 3/4 (400) | 9 13/16 (250) | 7 3/16 (182) | 18V | 16.7 (7.6) | 550 (250) |

AUSAVINA VACUUM MULTILIFT PRO

- A portable lifter enables effortless transportation of materials across various work environments.
- Ausavina Vacuum Multilift Pro is designed to lift material slabs safely and efficiently, handling loads of up to 440 lbs (200 kg).

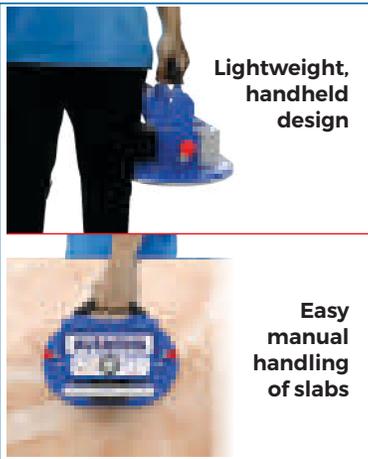

Lightweight, handheld design



Easy manual handling of slabs



Control and warning systems help to operate more safely



Handle for guiding during operation

COMPACT AND LIGHTWEIGHT

Compact design allows for easy transport and storage. It can be operated manually for small stone slabs.

FLEXIBLE & SAFE

Easily lift and move stone slabs in horizontal and vertical positions. Equipped with control and warning systems for secure operation.



EASY TO USE

The rubber-covered guiding handle enables fast, precise control when positioning stone slabs.

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Battery | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|------------|----------------|---------------|----------------|---------|---------------------|--------------------------|
| AVMP250-M2 | 15 3/4 (400) | 9 13/16 (250) | 9 5/8 (245) | 18V | 20.2 (9.2) | 440 (200) |


AUSAVINA QLI VACUUM LIFTER

- Ausavina Qli Vacuum Lifter is a powerful tool for handling glass sheet and stone slab with a maximum weight of 440 pounds. Due to its simple modular design, each lifter component can be detached for easy transportation and maintenance.

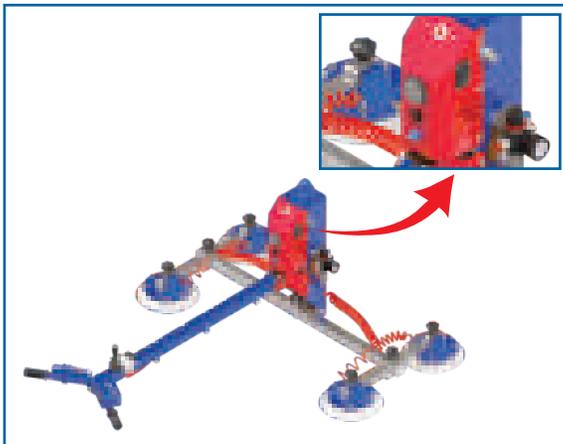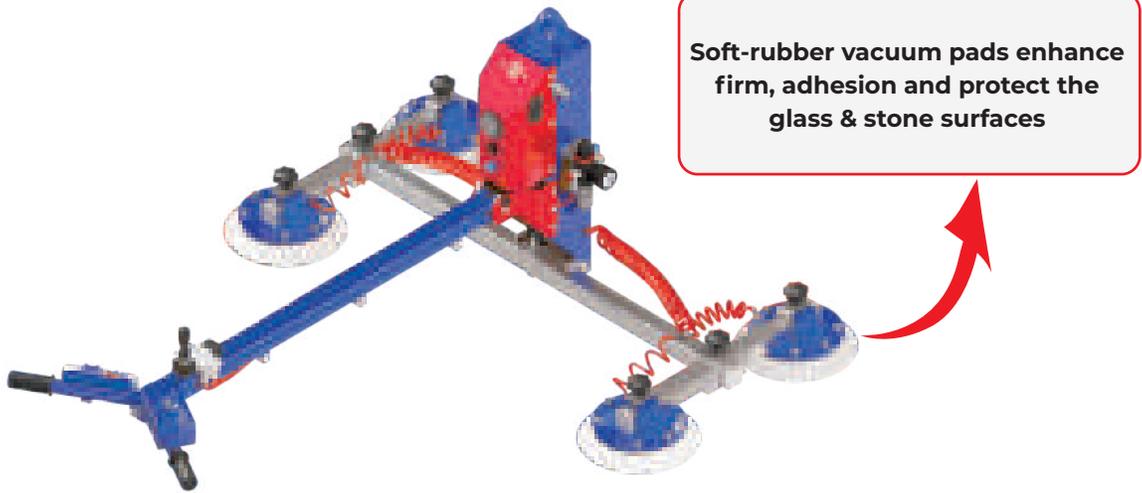

WARNING SYSTEM

An acoustic and visual low vacuum warning alerts the operator.

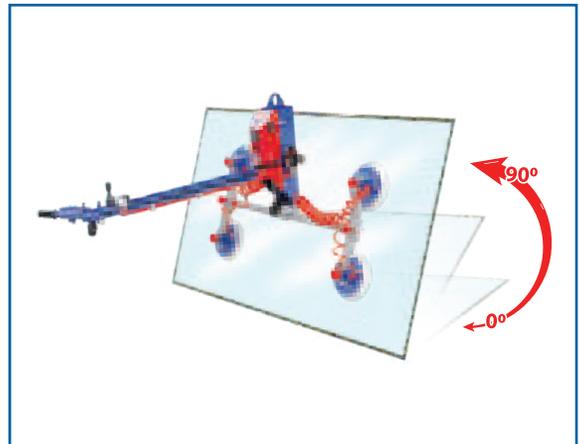

EASY TILT - FLIP

The AQVL200 lifter can safely tilt the glass sheet or stone slab from 0 to 90 degrees and back, allowing for flexible positioning.

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Inclined Angle | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|---------|----------------|----------------|----------------|----------------|---------------------|--------------------------|
| AQVL200 | 58 1/8 (1476) | 45 3/16 (1147) | 24 1/8 (612) | 90° | 70.4 (32) | 440 (200) |

AUSAVINA STONE VACUUM LIFTER (SVL25)



- Ausavina Stone Vacuum Lifter (SVL25) is designed to lift smooth-surface stone slabs and is powered by compressed air, with a lifting capacity of 550 lbs (250 kg). It features robust construction and the ability to lift and tilt the stone slab.



The incorporated audible and visual alarm system, powered by 9V battery, ensures safe operation for the user

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|-------|--|--------------------------------------|---|------------------------|-----------------------------|
| SVL25 | 36 ¹³ / ₁₆ (935) | 25 ³ / ₄ (654) | 39 ¹⁵ / ₁₆ (1014) | 118.8 (54) | 550 (250) |

| Number of Vacuum Pads | Minimum Slab Dimensions - In (mm) | Tilt Angle | Vacuum Pressure (kg/cm ²) | Compressed Air Source (kg/cm ²) |
|-----------------------|--|------------|---------------------------------------|---|
| 1 pc | 24 ⁷ / ₁₆ x 16 ⁵ / ₁₆ (620 x 415) | 0° ~ 90° | - 0.7 ~ - 0.8 | 6 ~ 8 |



AUSAVINA STONE VACUUM LIFTER (SVL50)


- Ausavina Stone Vacuum Lifter (SVL50) is designed to lift smooth-surface stone slabs and is powered by compressed air, with a lifting capacity of 1100 lbs (500 kg). It features robust construction and the ability to lift and incline the stone slab.



The integrated audible and visual alarm system, powered by 9V battery, ensures safe operation for the user



The vacuum pads can be manually rotated 90 degrees

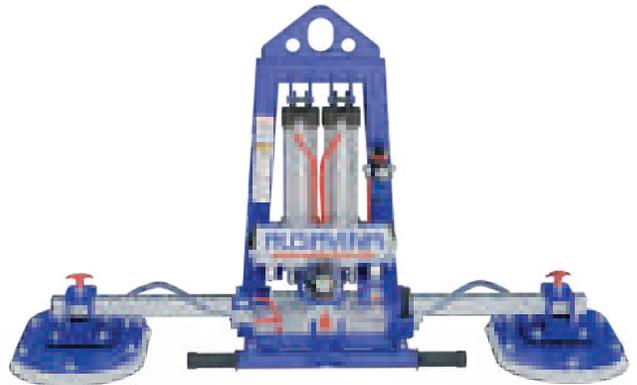

This trolley is included with product

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|-------|----------------|---------------|----------------|---------------------|--------------------------|
| SVL50 | 41 7/16 (1053) | 55 1/2 (1410) | 61 5/8 (1566) | 200.2 (91) | 1100 (500) |

| Number of Vacuum Pads | Minimum Slab Dimensions - In (mm) | Tilt Angle | Vacuum Pressure (kg/cm ²) | Compressed Air Source (kg/cm ²) |
|-----------------------|-----------------------------------|------------|---------------------------------------|---|
| 2 pcs | 44 3/8 x 24 7/16 (1120 x 620) | 0° ~ 90° | - 0.7 ~ - 0.8 | 6 ~ 8 |


AUSAVINA STONE VACUUM LIFTER (SVL75)



- Ausavina Stone Vacuum Lifter (SVL75) is designed to lift smooth-surface stone slabs and is powered by compressed air, with a lifting capacity of 1650 lbs (750 kg). It features robust construction and the ability to lift and incline the stone slab.



The integrated audible and visual alarm system, powered by 9V battery, ensures safe operation for the user



The vacuum pads can be manually rotated 90 degrees



This trolley is included with product

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|-------|----------------|---------------|----------------|---------------------|--------------------------|
| SVL75 | 37 1/8 (943) | 71 1/8 (1806) | 62 3/4 (1581) | 213.4 (97) | 1650 (750) |

| Number of Vacuum Pads | Minimum Slab Dimensions - In (mm) | Tilt Angle | Vacuum Pressure (kg/cm ²) | Compressed Air Source (kg/cm ²) |
|-----------------------|-----------------------------------|------------|---------------------------------------|---|
| 3 pcs | 51 15/16 x 24 7/16 (1320 x 620) | 0° ~ 90° | - 0.7 ~ - 0.8 | 6 ~ 8 |



AUSAVINA STONE VACUUM LIFTER (SVL100)


- Ausavina Stone Vacuum Lifter (SVL100) is designed to lift smooth-surface stone slabs and is powered by compressed air, with a lifting capacity up to 2200 lbs (1000 kg). It features robust construction and the ability to lift and tilt the stone slab.



The integrated audible and visual alarm system, powered by 9V battery, ensures safe operation for the user



The vacuum pads can be manually rotated 90 degrees

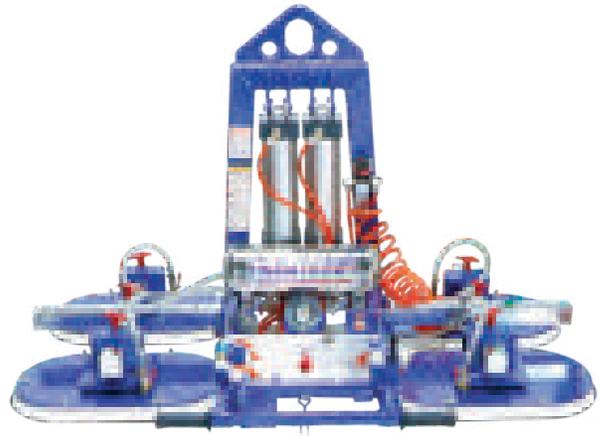

This trolley is included with product


| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|--------|-----------------|---------------|----------------|---------------------|--------------------------|
| SVL100 | 52 15/16 (1344) | 55 1/2 (1410) | 61 5/8 (1566) | 330 (150) | 2200 (1000) |

| Number of Vacuum Pads | Minimum Slab Dimensions - In (mm) | Tilt Angle | Vacuum Pressure (kg/cm ²) | Compressed Air Source (kg/cm ²) |
|-----------------------|-----------------------------------|------------|---------------------------------------|---|
| 4 pcs | 51 15/16 X 31 1/2 (1320 x 800) | 0° ~ 90° | - 0.7 ~ - 0.8 | 6 ~ 8 |

- Multi Stone Vacuum Lifter (AMSVL100) is a powerful tool for transporting large-size slabs. It is typically used with a hoist to lift stone slabs onto a processing table or to move them within a warehouse or workshop.



The product is equipped with trolley to move and store stone slabs easily

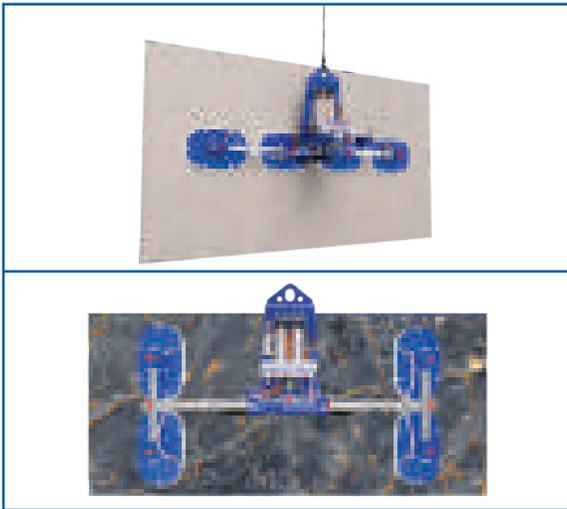

The integrated audible and visual alarm system, powered by 9V battery, ensures safe operation for the user at all time




The vacuum pads can be manually rotated 90 degrees

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|----------|---|---------------------------------------|---------------------------------------|------------------------|-----------------------------|
| AMSVL100 | 52 ¹⁵ / ₁₆ (1345) | 86 ⁷ / ₈ (2206) | 61 ⁵ / ₈ (1566) | 330 (150) | 2200 (1000) |

| Number of Vacuum Pads | Minimum Slab Dimensions - In (mm) | Tilt Angle | Vacuum Pressure (kg/cm ²) | Compressed Air Source (kg/cm ²) |
|-----------------------|---|------------|---------------------------------------|---|
| 4 pcs | 90 ³ / ₁₆ x 25 ³ / ₁₆ (2300 x 640) | 0° ~ 90° | - 0.7 ~ - 0.8 | 6 ~ 8 |

AUSAVINA VACUUM LIFTER (DVL400)

- For large material slabs up to 880 lbs (400 kg).
- Strong vacuum force and excellent maneuverability in all directions.
- Powered by a battery system for greater versatility and operation in any area.

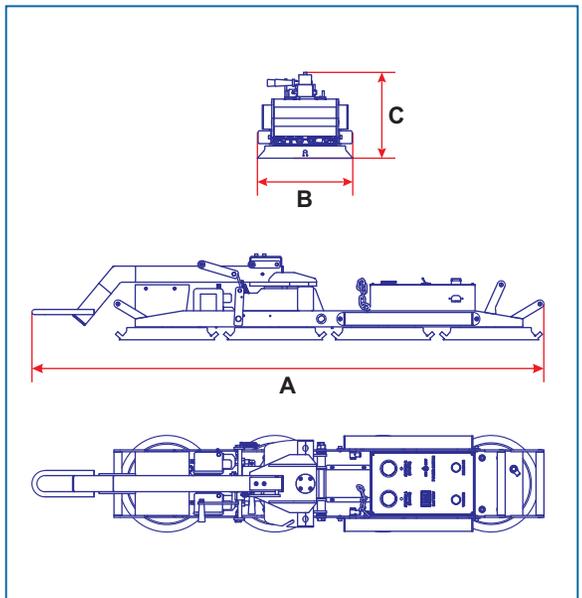

W.L.L.: Work Load Limit



| Model | Length (A) In (mm) | Width (B) In (mm) | Height (C) In (mm) | Net Weight lbs (kg) | W.L.L. lbs (kg) | Diameter of Vacuum Pads - In (mm) |
|--------|--|--|--------------------------------------|------------------------|--------------------|--|
| DVL400 | 65 ⁷ / ₁₆ (1662) | 11 ¹³ / ₁₆ (300) | 10 ¹ / ₂ (267) | 137 (62) | 880 (400) | 11 ¹³ / ₁₆ (300) |

| Number of Vacuum Pads | Minimum Material Slab Dimensions In (mm) | Rotate Angle | Tilt Angle | Voltage | Battery Capacity | Power Charger | |
|--------------------------|---|-----------------|------------|---------|---------------------|----------------|--------------------------|
| 4 pcs | 13 ³ / ₄ x 39 ³ / ₈ (350 x 1000) | 180° | 90° | 12V-DC | 12V, 18Ah | USA 110V-AC | INTERNATIONAL 220V-AC |

AUSAVINA VACUUM LIFTER (AVL480)



- For large material slabs up to 1056 lbs (480kg). Features superior vacuum force and maneuverability in all directions.

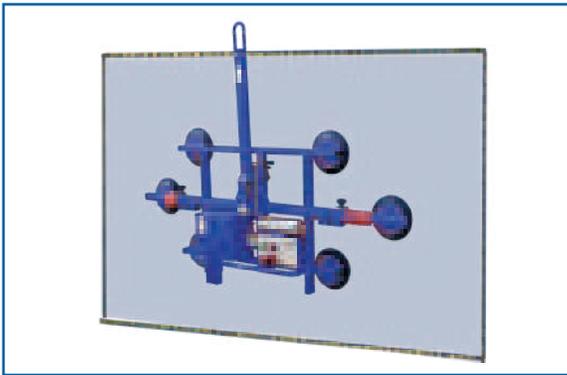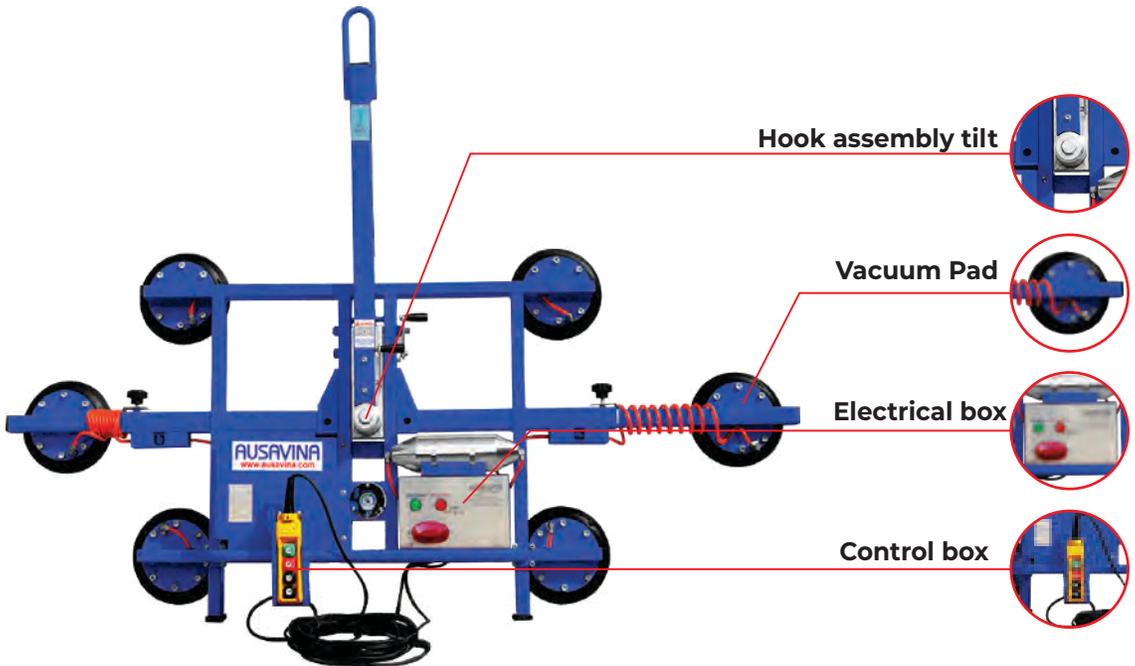

W.L.L.: Work Load Limit

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | W.L.L. lbs (kg) | Diameter of Vacuum Pads - In (mm) |
|--|----------------|----------------|----------------|---------------------|-----------------|-----------------------------------|
| AVL480 <i>(Electric Powered)</i> | 59 1/16 (1500) | 68 5/16 (1735) | 12 1/16 (305) | 158.4 (72) | 1056 (480) | 9 13/16 (250) |

| Number of Vacuum Pads | Minimum Material Slab Dimensions In (mm) | Rotate Angle | Tilt Angle | Power Charger | |
|-----------------------|--|-------------------------|------------|----------------|--------------------------|
| 6 pcs | 70 7/8 x 39 3/8 (1800 x 1000) | Left: 90° Right: 90° | 90° | USA 110V-AC | INTERNATIONAL 220V-AC |




AUSAVINA VACUUM LIFTER (DVL480)

- For large material slabs up to 1056 lbs (480 kg). Features superior vacuum force and maneuverability in all directions.




For battery-powered only:

- Battery charging time: 6 hrs 30 mins
- A full charge provides approximately 150 vacuum-release cycles

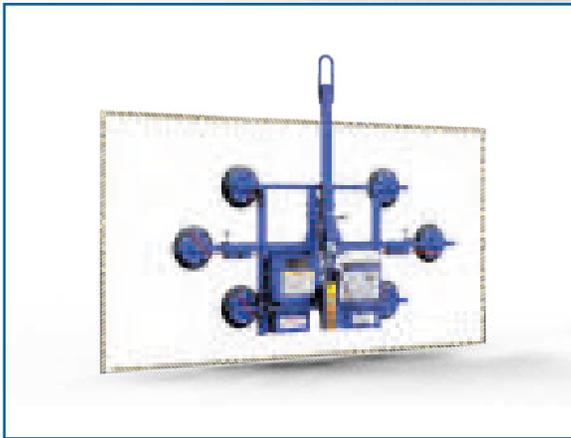

This trolley (sold separately) can be attached according to your requirement

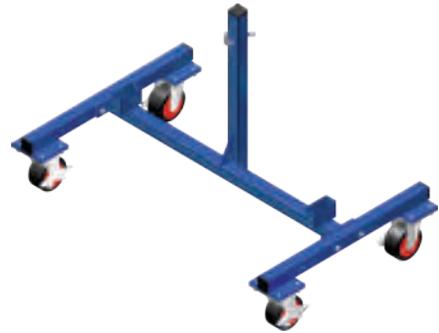

W.L.L.: Work Load Limit



| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | W.L.L. lbs (kg) | Diameter of Vacuum Pads In (mm) |
|---|----------------|------------------------------------|----------------|---------------------|-----------------|---------------------------------|
| DVL480 <i>(Battery Powered)</i> | 59 1/16 (1500) | 68 5/16 x 84 1/16 (1735 x 2135) | 12 1/16 (305) | 160.6 (73) | 1056 (480) | 9 13/16 (250) |

| Number of Vacuum Pads | Minimum Material Slab Dimensions In (mm) | Rotate Angle | Tilt Angle | Voltage | Battery Capacity | Power Charger | |
|-----------------------|--|-------------------------|------------|---------|------------------|----------------|--------------------------|
| 6 pcs | 70 7/8 x 39 3/8 (1800 x 1000) | Left: 90° Right: 90° | 90° | 12V-DC | 12V/18Ah | USA 110V-AC | INTERNATIONAL 220V-AC |

AUSAVINA VACUUM LIFTER (AVL500)



- Designed for large material slabs up to 1100 lbs (500 kg).
- Provides superior vacuum force and 360-degree maneuverability.

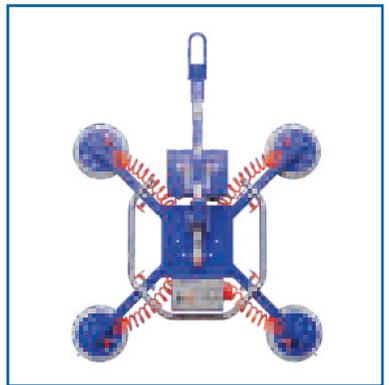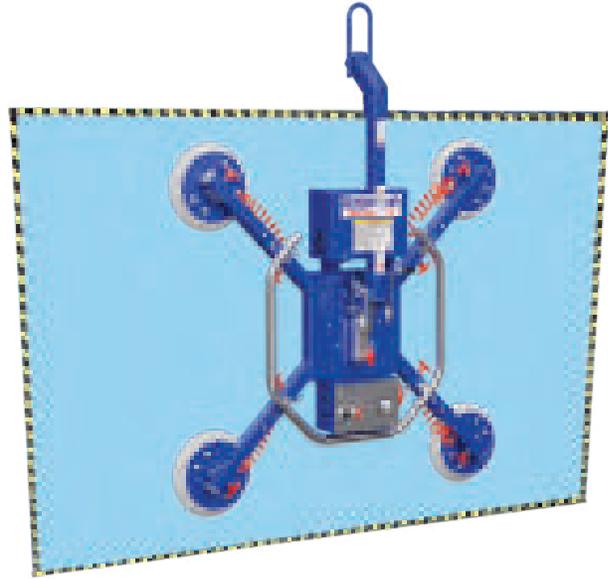

W.L.L.: Work Load Limit


| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | W.L.L. lbs (kg) | Diameter of Vacuum Pads - In (mm) |
|---|-------------------|------------------|-------------------|------------------------|--------------------|--------------------------------------|
| AVL500 <i>(AC Electric Powered)</i> | 66 5/16 (1685) | 51 1/16 (1310) | 12 5/8 (320) | 160.6 (73) | 1100 (500) | 11 13/16 (300) |

| Number of Vacuum Pads | Minimum Material Slab Dimensions In (mm) | Rotate Angle | Tilt Angle | Power Charger | |
|--------------------------|---|-------------------------|------------|----------------|--------------------------|
| 4 pcs | 33 7/16 x 35 7/16 (850 x 900) | Left: 90° Right: 90° | 90° | USA 110V-AC | INTERNATIONAL 220V-AC |





AUSAVINA VACUUM LIFTER (DVL500)

- Designed for large material slabs up to 1100 lbs (500 kg).
- Provides superior vacuum force and 360-degree maneuverability.

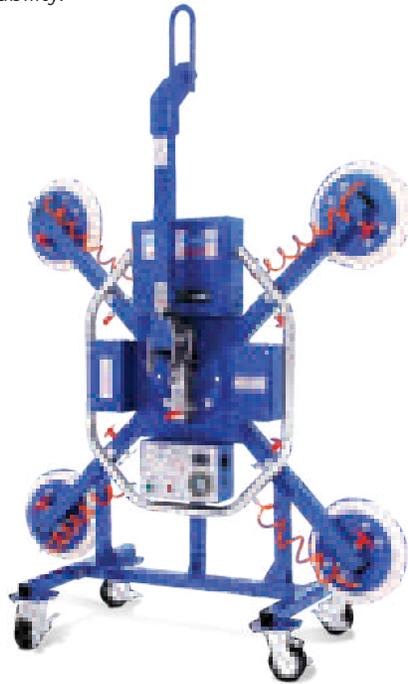

For battery-powered only:

- Battery charging time: 6 hrs 30 mins
- A full charge provides approximately 150 vacuum-release cycles

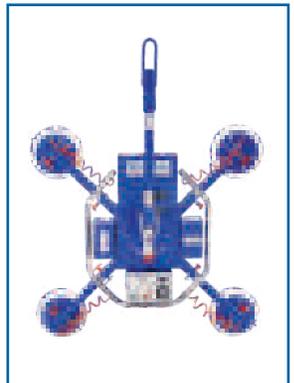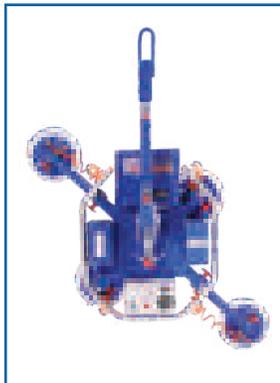



W.L.L.: Work Load Limit

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | W.L.L. lbs (kg) | Diameter of Vacuum Pads - In (mm) |
|---|----------------|----------------|----------------|---------------------|-----------------|-----------------------------------|
| DVL500 <i>(Battery Powered)</i> | 66 5/16 (1685) | 51 1/16 (1310) | 12 5/8 (320) | 172.7 (78.5) | 1100 (500) | 11 13/16 (300) |

| Number of Vacuum Pads | Minimum Material Slab Dimensions In (mm) | Rotate Angle | Tilt Angle | Voltage | Battery Capacity | Power Charger | |
|-----------------------|--|--------------|------------|---------|------------------|----------------|--------------------------|
| 4 pcs | 33 7/16 x 35 7/16 (850 x 900) | 360° | 90° | 12V-DC | 12V/18Ah | USA 110V-AC | INTERNATIONAL 220V-AC |

AUSAVINA VACUUM LIFTER (DVL1000)

- Designed for effortlessly and smoothly lifting and installing large material slabs.
- The battery-powered system enables convenient and flexible operation in warehouses, factories and construction sites, without the need for electricity or compressed air.

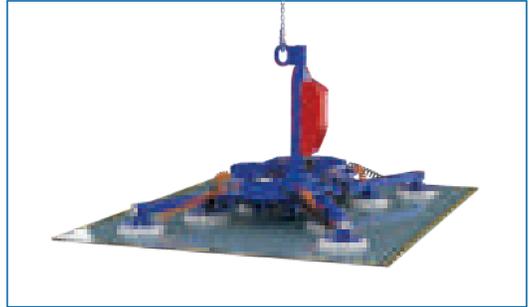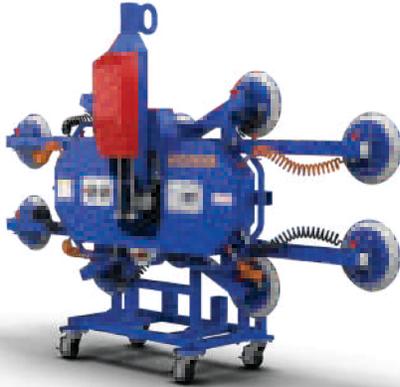

Pressure gauge, LED light and Alarm sound

Voltage indicator

EASY TO CONTROL

The visual and sound alarm system helps the lifter operate more safely and effectively.

Two vacuum systems

ADVANCED SAFETY SYSTEM

Two independent vacuum systems evenly distribute force across 10 vacuum pads, ensuring safe operation without damaging the slab.

360°

90°

CONVENIENCE

Capable of 360-degree rotation for easy installation. The lever arm is adjustable in four directions, allowing for convenient handling of both vertical and horizontal slabs.

FLEXIBILITY



Vacuum pads can be repositioned on adjustable crossbars to accommodate various slab sizes.

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) | Diameter of Vacuum Pads - In (mm) |
|---------|----------------|---------------|----------------|---------------------|--------------------------|-----------------------------------|
| DVL1000 | 86 3/4 (2204) | 61 5/8 (1641) | 19 7/8 (505) | 528 (240) | 2200 (1000) | 11 13/16 (300) |

| Number of Vacuum Pads | Minimum Material Slab Dimensions - In (mm) | Rotate Angle | Tilt Angle | Battery Capacity | Power Charger |
|-----------------------|---|--------------|------------|------------------|--|
| 10 pcs | Width: 19 13/16 x 94 1/2 (500 x 2400) Length: 64 9/16 x 106 5/16 (1640 x 2700) | 360° | 90° | 12VDC-36Ah | USA: 110V-AC INTERNATIONAL: 220V-AC |

AUSAVINA VACUUM LIFTER (AVL600)


- An ideal solution used for lifting and moving various material slabs.
- Soft rubber vacuum pads provide high adhesion while protecting the surface of the slabs.
- Wide-length level arms securely lift slabs up to 122 5/8" (3115 mm).

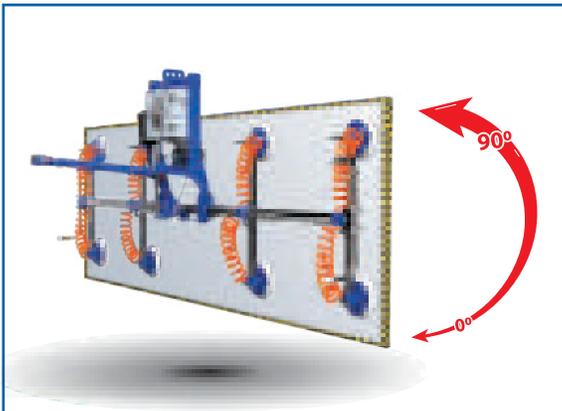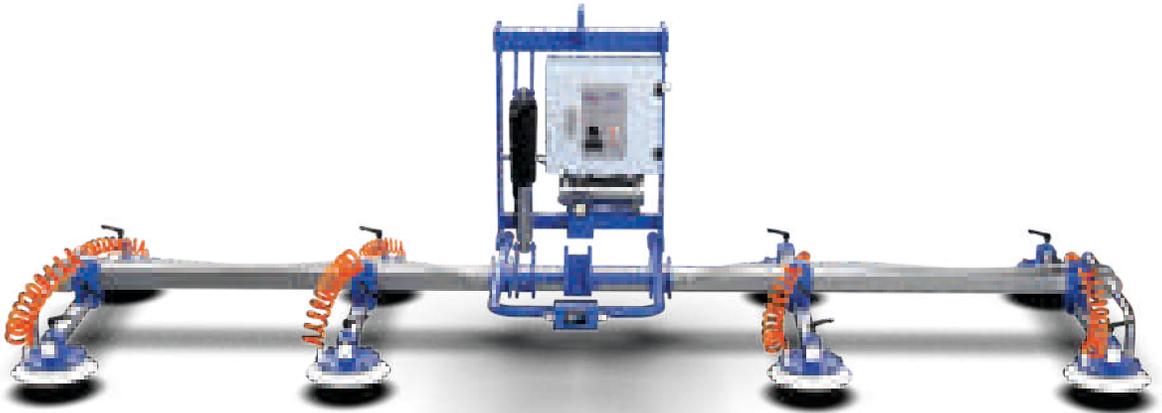

FLEXIBLE TILT FROM 0° TO 90°



The integrated audible and visual alarm system, powered by a 9V battery, ensures safe operation for the user



Stone



Glass



Porcelain

FLEXIBLE USE FOR DIFFERENT MATERIAL SLABS


| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|--------|-------------------|------------------|-------------------|------------------------|-----------------------------|
| AVL600 | 122 5/8 (3115) | 55 1/8 (1400) | 38 11/16 (982) | 261.8 (119) | 1320 (600) |

| Number of Vacuum Pads | Minimum Sheet Dimensions In (mm) | Tilt Angle | Vacuum Pressure | Electric Supply AC (1 phase) |
|-----------------------|-------------------------------------|------------|-----------------|---------------------------------|
| 8 pcs | 66 15/16 x 23 5/8 (1700 x 600) | 0 ~ 90° | -0.8 | 110V - 220V |

AUSAVINA VACUUM LIFTER (CVL600)

- A powerful tool for transporting large material sheets.
- Stable vacuum force ensures the sheets remain securely in place during operation.
- Soft rubber vacuum pads enhance adhesion and prevent scratches on the material surface.


*** Handy trolley is included**

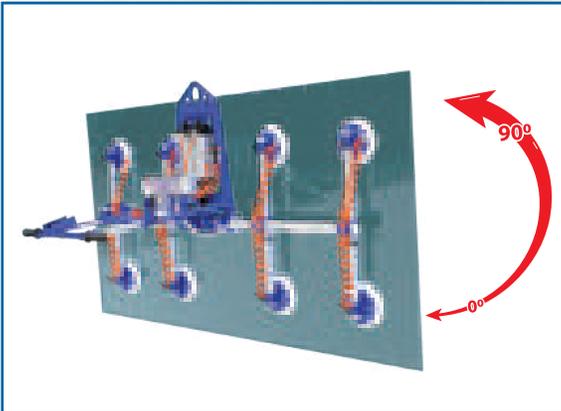

FLEXIBLE TILT FROM 0° TO 90°



The integrated audible and visual alarm system, powered by a 9V battery, ensures safe operation for the user



Stone



Glass



Porcelain


VERSATILE USE FOR DIFFERENT MATERIAL SLABS

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|--------|----------------|---------------|----------------|---------------------|--------------------------|
| CVL600 | 48 1/4 (1225) | 78 3/4 (2000) | 61 5/8 (1566) | 249.7 (113.5) | 1320 (600) |

| Number of Vacuum Pads | Minimum Sheet Dimensions In (mm) | Tilt Angle | Vacuum Pressure | Compressed Air Source (kg/cm ²) |
|-----------------------|----------------------------------|------------|-----------------|---|
| 8 pcs | 59 1/16 x 23 5/8 (1500 x 600) | 0 ~ 90° | -0.7 ~ -0.8 | 6 ~ 8 |

AUSAVINA ROTARY VACUUM LIFTER

- The perfect solution for lifting, moving and installing large material slabs.
- Powered by a LiFePO₄ battery for enhanced performance, greater efficiency and faster charging.
- Adjustable vacuum pads allow easy handling of various slab sizes.

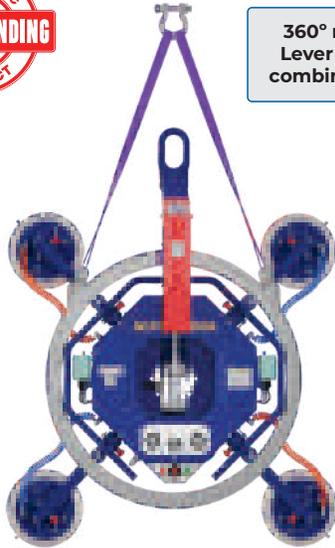


**360° rotation with
Lever arm or when
combined with Strap**




For battery-powered only:
 - Battery charging time: 5 hrs 30 mins
 - Full battery charge allows up to around 150 vacuum-release cycles

**Vacuum pads in
4 directions**



Minimum slab size
 39 3/8" x 39 3/8" (1000 x 1000 mm)

**Vacuum pads in
a straight line**




Minimum slab size
 78 3/4" x 15 3/4" (2000 x 400 mm)

Maximum slab size
 94 1/2" x 94 1/2" (2400 x 2400 mm)



Tilting control

Operate safely and efficiently with intuitive remote control access.

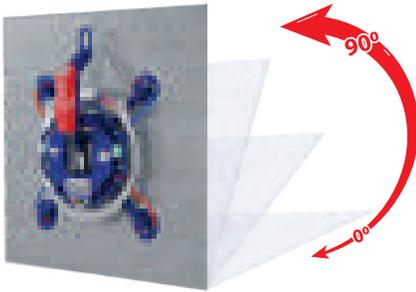

EASY TILTING

Tilts up to 90° vertically (and back) with an electric cylinder for safe and convenient operation.



FLEXIBLE ROTATION

Rotates 0° to 360° for quick and effortless slab installation.


| Model | Length In (mm) | Width In (mm) | Height In (mm) | Battery Capacity | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|----------------|-------------------|------------------|-------------------|---------------------|------------------------|-----------------------------|
| ARVL500 | 62 7/8 (1597) | 50 5/8 (1286) | 17 11/16 (450) | 12VDC/24Ah | 319 (145) | 1100 (500) |

AUSAVINA FORKLIFT POWER VACUUM LIFTER



Battery operated

- Designed to be used with a forklift truck to assist in lifting, moving and installing material slabs.
- The lifter includes a main frame and four vacuum pads to enhance productivity and efficiency.
- Fully battery-operated and can be recharge instantly when power is low.

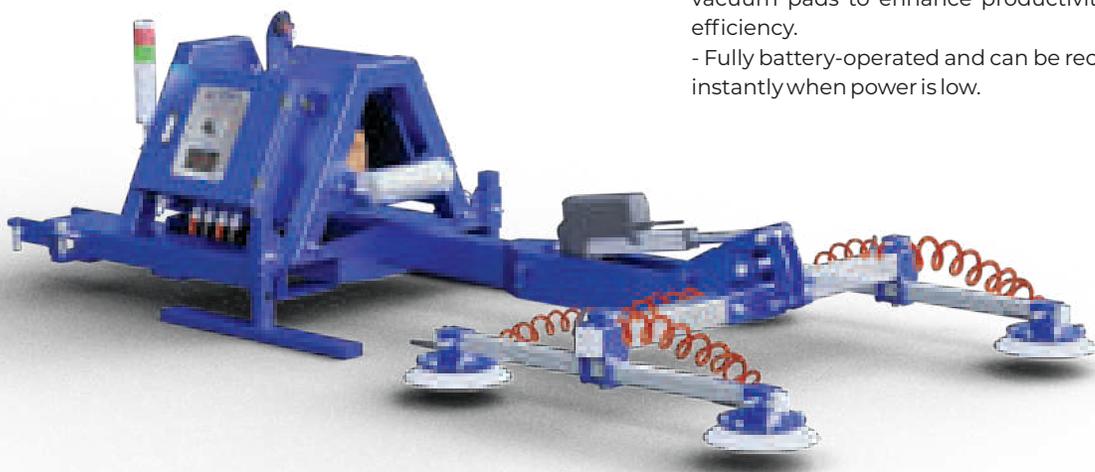


| Vacuum pads in 4 directions | Vacuum pads in a straight line |
|--|---|
| <i>Minimum slab size</i> 23 5/8" x 31 1/2" (600 x 800 mm) | <i>Minimum slab size</i> 15 3/4" x 62 15/16" (400 x 1600 mm) |
| <i>Maximum slab size</i> 62 15/16" x 94 1/2" (1600 x 2400 mm) | |

Easy to flip the slab



FLEXIBLE

The device can be easily tilted from horizontal to vertical and vice versa, enabling effective slab handling

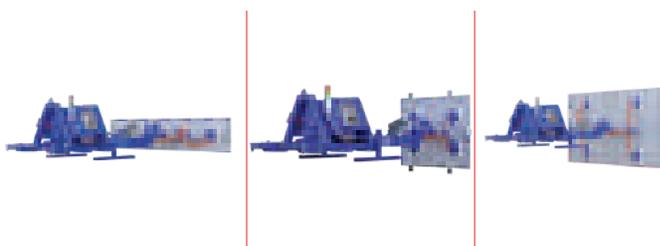

EASY TO USE


Vacuum pads can be adjusted to the appropriate positions for securely vacuuming and lifting slabs of various sizes

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Battery Capacity | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|-----------------|-------------------|------------------|-------------------|---------------------|------------------------|-----------------------------|
| AFPVL300 | 98 3/4 (2509) | 45 11/16 (1160) | 23 3/8 (588) | 12 VDC (100Ah) | 418 (190) | 660 (300) |

AUSAVINA MANUAL VACUUM GRIP LIFTER

- Designed for the easy and safe mounting and handling of materials such as glass sheets, windows or thin stone slabs.

Minimum slab dimensions:
43 5/16" x 23 5/8" (1100 mm x 600 mm)
Maximum slab dimensions:
94 1/2" x 47 3/4" (2400 mm x 1200 mm)

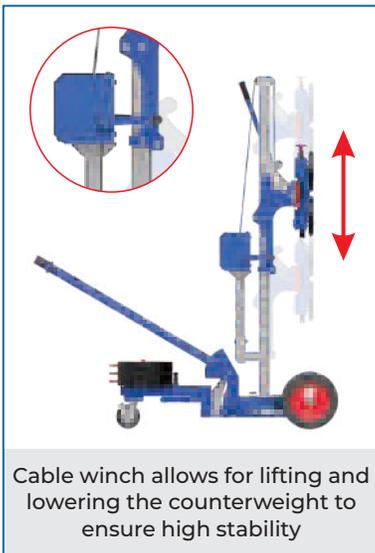

Cable winch allows for lifting and lowering the counterweight to ensure high stability



Vacuum lifter can be easily tilted to attach the glass sheet



The load can be rotated 90° to the left or right

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|----------------|-------------------|------------------|-------------------|------------------------|-----------------------------|
| MVGL150 | 68 9/16 (1742) | 37 5/8 (955) | 78 7/16 (1993) | 418 (190) | 330 (150) |

AUSAVINA BAG GRIPPER AUTOMATIC

- Designed to grip and move various types of bags, such as cement bags, rice bags, etc.
- Constructed from high-quality steel for a sturdy structure with a lifting capacity of up to 100 kg.



SIMPLE DESIGN

Compact design allows easy connection to any hoist system and enables immediate operation



AUTOMATIC

Automatic locking latch mechanism ensures easy and convenient gripping, lifting and releasing of bags




EASY TO USE

Clamp jaws are curved to securely embrace the bag, ensuring fast and safe transportation

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Grip Range In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|----------------|-------------------|------------------|-------------------|----------------------------------|------------------------|-----------------------------|
| ABGA600 | 30 7/16 (773) | 15 3/4 (400) | 37 3/8 (950) | 11 13/16 ~ 23 5/8 (300 ~ 600) | 55 (25) | 220 (100) |

AUSAVINA ROUND MATERIAL LIFTER AUTOMATIC

- Compactly designed to lift and move various round materials such as steel, plastic and more.
- Constructed from durable steel with a high working load limit of up to 330 lbs (150 kg).
- Simple structure allows for easy assembly, disassembly and convenient transport.

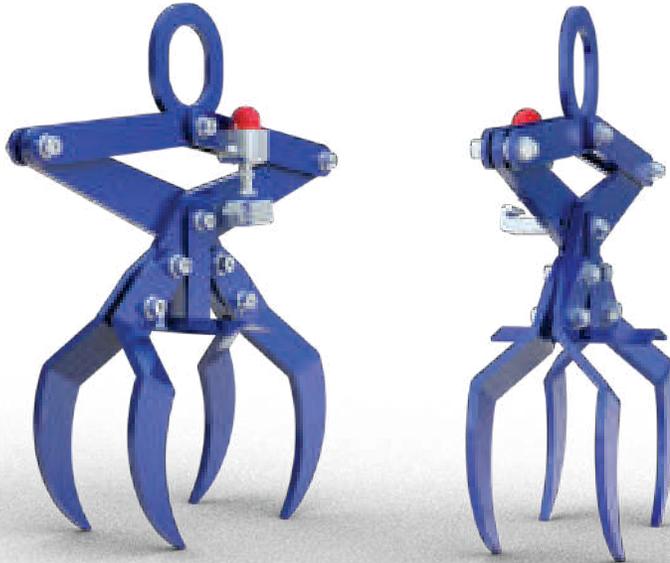

AUTOMATIC

The automatic locking latch mechanism enables effortless lifting and transport of round materials.



SAFE

Durable and secure construction ensures a firm grip on long and large round materials.




EASY TO USE

Can be used with a hoist system to easily access and move materials to desired locations.

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Grip Range In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|----------|-------------------|------------------|-------------------|--------------------------------|------------------------|-----------------------------|
| ARML200A | 16 7/8 (429) | 5 7/8 (150) | 17 15/16 (456) | 3 15/16 ~ 7 7/8 (100 ~ 200) | 18.04 (8.2) | 330 (150) |

AUSAVINA FORKLIFT BOOM AFJ25-B




- Offers versatility and maximum efficiency for lifting and moving goods.
- When fully extended, the beam reaches up to 103 7/8" (2634 mm).

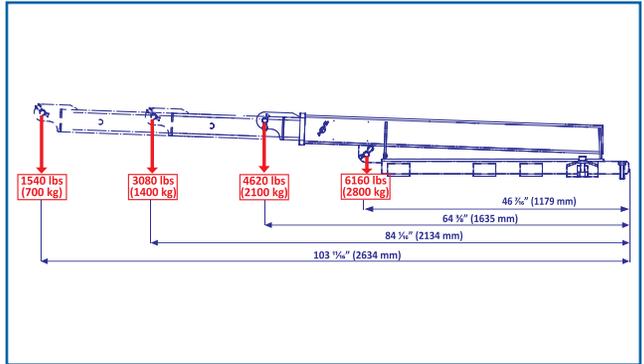

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Max Load When Fully Extended lbs (kg) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|---------|-----------------|----------------|----------------|---------------------------------------|---------------------|--------------------------|
| AFJ25-B | 65 13/16 (1672) | 25 15/16 (660) | 11 5/16 (287) | 1540 (700) | 226.6 (103) | 6160 (2800) |

AUSAVINA SMART FORKLIFT BOOM ASFJ27

- The ASFJ27 is a forklift attachment designed to work with lifter equipment for transporting stone slabs and other hanging applications. Ideal for use in confined spaces, the forklift beam features a telescopic design for adjustable length. It is easy to store, package and transport.

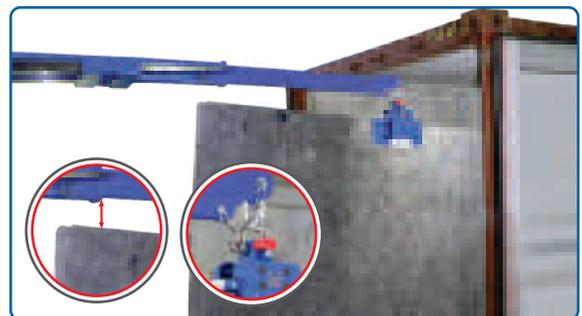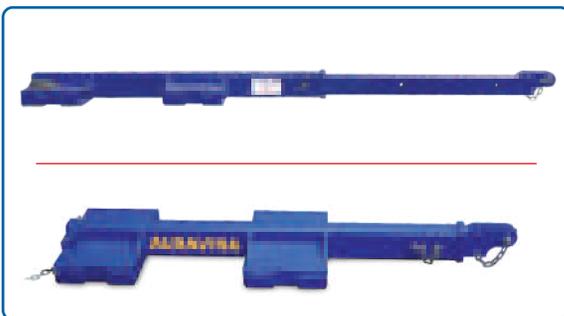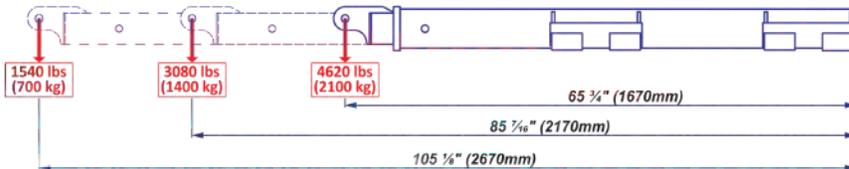


| Model | Length In (mm) | Width In (mm) | Height In (mm) | Max Load When Fully Extended lbs (kg) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|--------|----------------|---------------|----------------|---------------------------------------|---------------------|--------------------------|
| ASFJ27 | 67 5/16 (1710) | 20 1/2 (520) | 5 13/16 (145) | 1540 (700) | 184.8 (84) | 4620 (2100) |



AUSAVINA FORKLIFT BOOM

AUSAVINA FORKLIFT BOOM AFJ35

- Offers versatility and maximum efficiency for the operator.
- The telescopic design allows for adjustable length to accommodate various load capacities.

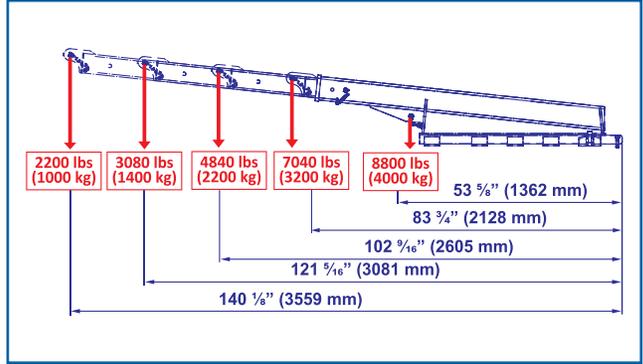


| Model | Length In (mm) | Width In (mm) | Height In (mm) | Max Load When Fully Extended lbs (kg) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|-------|----------------|----------------|----------------|---------------------------------------|---------------------|--------------------------|
| AFJ35 | 85 1/16 (2161) | 25 15/16 (660) | 18 13/16 (478) | 2200 (1000) | 319 (145) | 8800 (4000) |



AUSAVINA SWING-ARM FORKLIFT BOOM

- Ausavina Swing-Arm Forklift Boom is an ideal solution for handling hard-to-reach slabs, especially during load and unload operations in closed-top containers or compact factory spaces. It is designed for precision in tight environments.
- Swing arm features 4 lock points and multiple angle settings.
- Extendable length up to 109 7/16" (2780 mm).

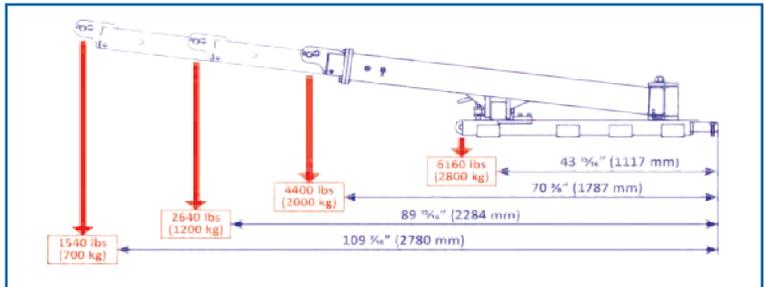


| Model | Length In (mm) | Width In (mm) | Height In (mm) | Max Load When Fully Extended lbs (kg) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|--------|----------------|---------------|----------------|---------------------------------------|---------------------|--------------------------|
| AFJS25 | 71 7/8 (1825) | 35 7/16 (900) | 16 9/16 (420) | 1540 (700) | 286 (130) | 6160 (2800) |

AUSAVINA TELESCOPIC FORKLIFT BOOM




- Ausavina Telescopic Forklift Boom is designed with a pipe-cage-style structure, this boom adjusts easily to accommodate different load requirements.
- The device can reach 138 1/8" (3508 mm) when fully extended.

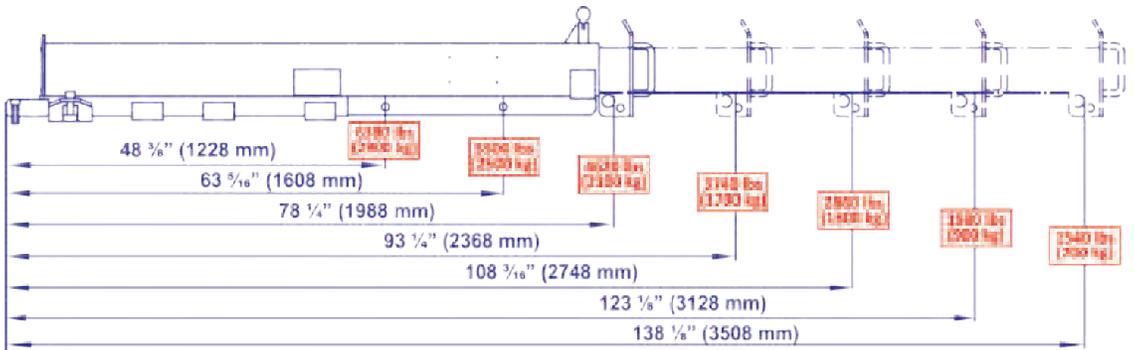

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Max Load When Fully Extended lbs (kg) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|--------|---------------------------------|----------------|----------------|---------------------------------------|---------------------|--------------------------|
| ATFB25 | 82 5/8 ~ 142 7/16 (2098 ~ 3618) | 25 15/16 (660) | 14 5/8 (371) | 1540 (700) | 358.6 (163) | 6380 (2900) |

AUSAVINA PIVOT FORKLIFT BOOM


- Ausavina Pivot Forklift Boom specifically designed for lifting, loading and unloading goods with enhanced flexibility.
- Constructed from reinforced steel for exceptional strength and long-lasting durability.
- Adjustable lifting angle allows forklift operators to reach various heights and positions efficiently, boosting productivity.

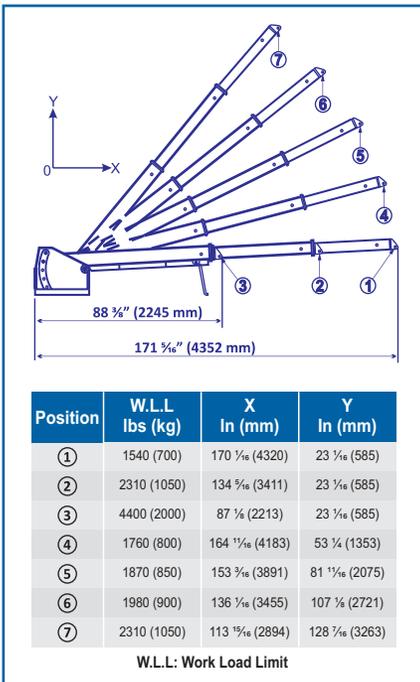

| Model | PFB400 |
|-----------------------|---------------------------------|
| Length - In (mm) | 88 3/8 ~ 171 1/16 (2245 ~ 4352) |
| Width - In (mm) | 21 1/8 (536) |
| Height - In (mm) | 30 13/16 (782) |
| Net Weight - lbs (kg) | 578.6 (263) |

AUSAVINA TPS FORKLIFT BOOM 3 IN 1

- Designed to be used with a forklift truck for transporting material slabs within warehouses, factories and similar environments.
- Smoothly adjustable lifting angle for enhanced convenience and efficiency.
- Constructed from solid steel for superior durability and strength.

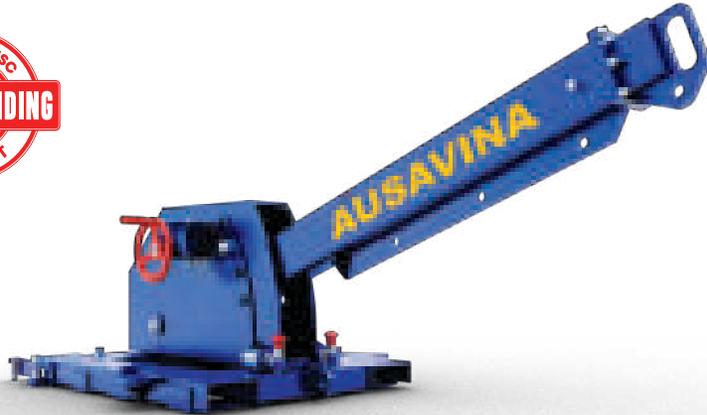


EASY TO SWING (LEFT, RIGHT)

The boom can swing up to 30° in both directions, allowing easy operation in narrow spaces such as trucks and small warehouses.



EASY TO EXTEND

It can also extend up to 140 3/8" for efficient loading and unloading of slabs deep inside containers.

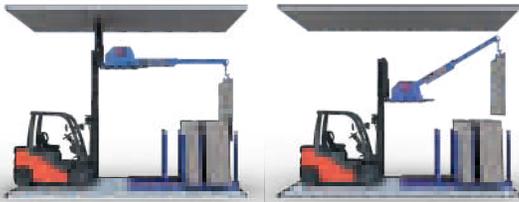


ADJUSTABLE LIFT ANGLES

Easy to adjust the lift angle up to 30° for loading/unloading heavy-duty materials in height-restricted areas.

HANDWHEEL

ROLLER

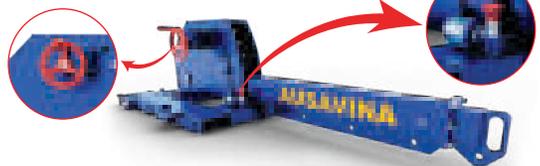

EASY TO USE

The handwheel allows for smooth and quick lifting or lowering of the load. Crane direction can be easily adjusted left or right using the roller.

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|---------|-------------------|------------------|-------------------|------------------------|-----------------------------|
| ATPSF35 | 92 5/8 (2353) | 40 15/16 (1040) | 22 13/16 (580) | 569.8 (259) | 770 - 8800 (350 - 4000) |




AUSAVINA CONTAINER BUNDLE SLAB LOADER

ACBSL5T-M2



Unload vertical slab bundles

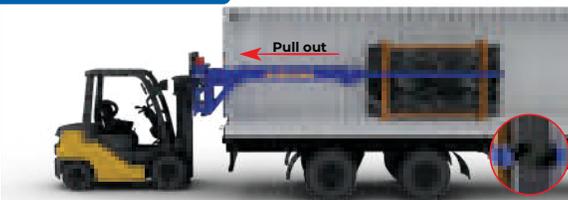

The boom can extend up to 235 1/4" (5975 mm). Two hooks at the front end help move bundle slabs closer to the container door easily and safely, allowing operators to work efficiently without needing to enter the container.



Easily load and unload slab bundles from containers, with a load capacity of up to **11000 lbs (5000 kg)**

Load/unload inclined slabs



ACBSL5T-PK efficiently clamps multiple slabs at once, with a grip range of 40–80 mm, directly from inclined slab bundles.




Easily and safely handle inclined slabs deep inside containers when used in combination with the ACBSL5T-PK lifter.

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Distance Between 2 Tubes In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) | Battery |
|------------|----------------|---------------|----------------|----------------------------------|---------------------|--------------------------|---------|
| ACBSL5T-M2 | 135 5/8 (3445) | 39 3/16 (996) | 43 9/16 (1107) | 3 15/16 ~ 23 5/8 (100 ~ 600) | 1980 (900) | 11000 (5000) | 18V |

AUSAVINA CONTAINER BUNDLE SLAB LOAD - UNLOADER PRO


ACBSL5T-PRO

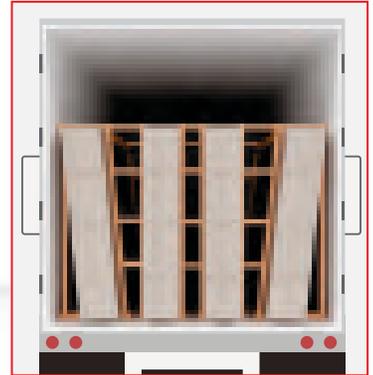

Attached lifter
ACBSL5T-PK
(Optional)

The ACBSL5T-PK, in combination with the ACBSL5T-PRO and ACBSL5T-M2, enables efficient loading and unloading of slabs from inclined slab bundles out of the container.

Load/unload vertical slab bundles

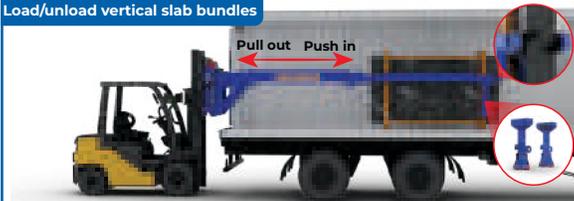

The reach extends up to 235 ¼" (5975). Two wheeled pusher legs and front-end hooks on the boom help move slab bundles closer to the container door easily and safely, allowing operators to work efficiently without entering deep inside.



The strap hook can be easily moved and repositioned to fit the size of the slabs.

Allow easy loading and unloading of slab bundles from containers, with a load capacity of up to **11000 lbs (5000 kg)**

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Distance Between 2 Tubes In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|-------------|----------------|---------------|----------------|----------------------------------|---------------------|--------------------------|
| ACBSL5T-PRO | 155 ½ (3950) | 39 ¾ (996) | 43 ¾ (1107) | 3 15/16 ~ 23 5/8 (100 ~ 600) | 2367.2 (1076) | 11000 (5000) |

Load/unload inclined slabs



ACBSL5T-PK easily clamps multi-slabs with a grip range of 40-80 mm from inclined slab bundles at once.




Easily and safely load/unload the deep-inside inclined slabs out of the container when combined with ACBSL5T-PK lifter.

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Grip Range In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|------------|----------------|---------------|----------------|--------------------------|---------------------|--------------------------|
| ACBSL5T-PK | 23 ¾ (604) | 12 ½ (317) | 18 ¾ (459) | 1 1/16 - 3 1/8 (40 - 80) | 75.9 (34.5) | 2646 (1200) |

AUSAVINA FORKLIFT EXTENSIONS

- Convenient and ideal for extending the range of your forklift operations.
- Easily connects to forklift trucks to maximize operational reach.

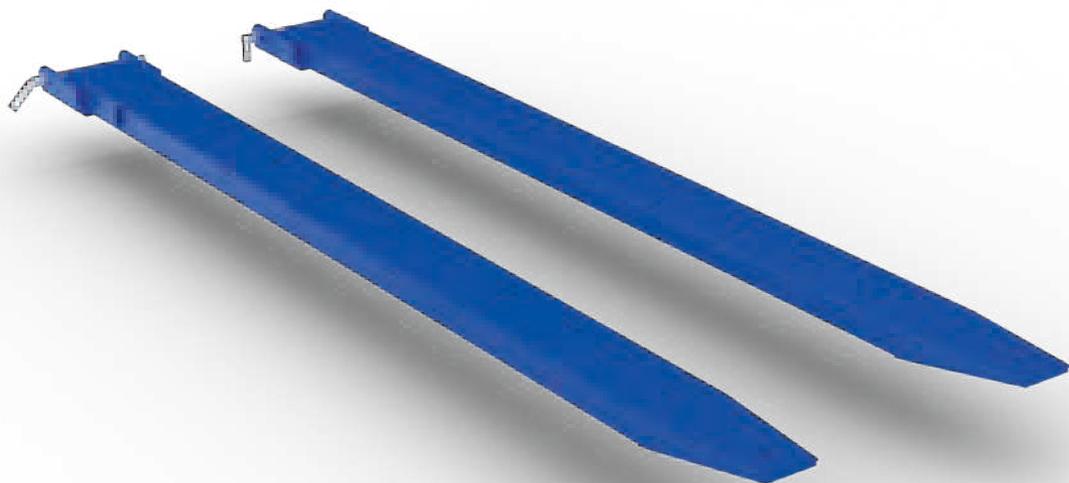

SOLD IN PAIRS




| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight Per Pair - lbs (kg) | Work Load Limit lbs (kg) |
|--------|-------------------|------------------|-------------------|-----------------------------------|-----------------------------|
| AFE083 | 86 ¼ (2190) | 7 ¾ (182) | 2 ¾ (70) | 162.8 (74) | 5500 (2500) |

AUSAVINA SPREADER BAR M1

ASB056M1

- Ausavina Spreader Bar M1 is specifically designed for the stone industry. When used with endless slings, it allows for easy slab rolling. The slings are suspended on aluminum rollers, enabling smooth slab rotation. Adjustable sling span from 17 ⁵/₁₆" (440 mm) to 56 ⁷/₁₆" (1440 mm).

This spreader bar is equipped with a swivel shackle, allowing for full 360° slab rotation

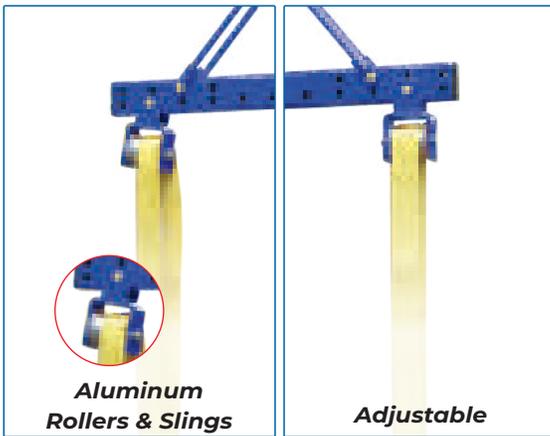

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | *W.L.L of Sling Belts (set of 2) - lbs (kg) | Hangers Distance Range - In (mm) |
|-----------------|--|--------------------------------------|--------------------------------------|------------------------|--|--|
| ASB056M1 | 59 ⁷ / ₁₆ (1510) | 4 ⁵ / ₁₆ (110) | 36 ⁵ / ₈ (930) | 99 (45) | 6600 (3000) | 17 ⁵ / ₁₆ - 56 ¹¹ / ₁₆ (440 - 1440) |

*W.L.L : Work Load Limit



AUSAVINA SPREADER BAR

- Ausavina Spreader Bar can be combined with a forklift boom to move a large slabs safely and efficiently. Features a Chain System designed for secure and convenient operation. Adjustable spread accommodates various load sizes.

AUSAVINA SPREADER BAR M4

ASB056M4



** The Scissor clamps and chains are not included*

AUSAVINA SPREADER BAR M6

ASB106M6



**Straps are included*





| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) | Length Range In (mm) |
|----------|-------------------|------------------|-------------------|------------------------|------------------------------|-----------------------------------|
| ASB056M4 | 55 7/16 (1408) | 3 3/8 (85) | 13 1/4 (337) | 52.8 (24) | 9900 (4500) | 30 11/16 - 49 5/8 (780 - 1260) |
| ASB106M6 | 106 5/8 (2708) | 4 7/16 (112) | 15 3/8 (390) | 113.3 (51.5) | 7700 - 9900 (3500 - 4500) | 57 1/2 - 104 3/4 (1460 - 2660) |

AUSAVINA SPREADER BAR M7

ASB106M7

- Ausavina Spreader Bar M7 is an efficient support tool for maneuvering large slabs. Its sleeve structure allows quick adjustment to three different widths for versatile slab handling and retracts neatly when not in use. Constructed from high-quality steel for exceptional strength and durability.

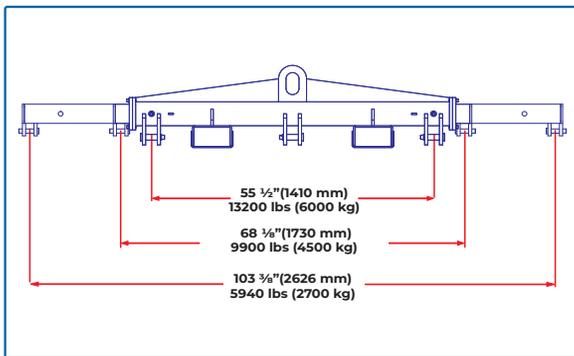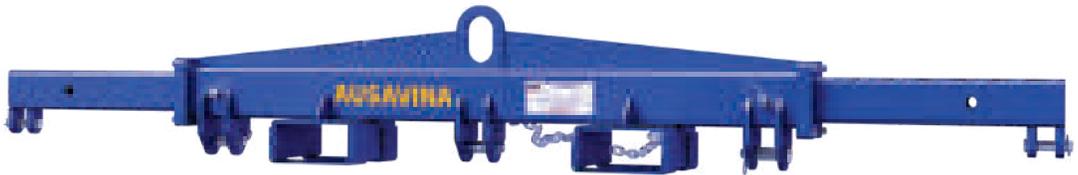

**COMBINED WITH
A FORKLIFT BOOM**



**INSTALLED
ON A FORKLIFT**

AUSAVINA SPREADER BAR M9

ASB84M9



| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|-----------------|-------------------|------------------|-------------------|------------------------|-------------------------------|
| ASB106M7 | 106 5/16 (2700) | 9 13/16 (250) | 14 15/16 (379) | 209 (95) | 5940 - 13200 (2700 - 6000) |
| ASB84M9 | 84 1/4 (2140) | 4 15/16 (125) | 24 5/16 (618) | 352 (160) | 17600 (8000) |



AUSAVINA EASY ADJUSTABLE CRANE

- Engineered with a hoist system for quick and efficient material handling across diverse workspaces.
- Features a simple structure with exceptional safety for flexible transport of heavy-duty bundled materials.
- An ideal solution for both indoor and outdoor operations, enhancing productivity and reducing labor costs.



Optional: Use a manual chain hoist (1 ton) or 500kg battery hoist based on customer requirements.

| | | |
|---|--|---|
| | | |
| ADJUSTABLE | FLEXIBLE | DURABLE |
| Easily adjust the height from 98 7/16" - 141 3/4" (2500 - 3600 mm) using two crank handles. | Compatible with various hoist systems and equipped with four swivel casters with safety brakes for easy and secure mobility. | Built from high-quality steel for a strong, stable structure with an impressive load capacity of up to 1100 lbs (500 kg). |

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Hoist | Work Load Limit lbs (kg) |
|-----------------|----------------|----------------|-----------------------------------|---------------------|----------------------------|--------------------------|
| AEAC500 | 118 1/8 (3000) | 55 9/16 (1412) | 98 7/16 - 141 3/4 (2500 - 3600) | 420.2 (191) | Chain hoist, Battery hoist | 1100 (500) |
| AEAC1000 | 118 1/8 (3000) | 55 9/16 (1412) | 100 3/8 - 143 11/16 (2550 - 3650) | 440 (200) | Chain hoist | 2200 (1000) |

AUSAVINA SINGLE HANDED CARRY CLAMPS

- Ausavina Single Handed Carry Clamps are designed for safely lifting and transporting stone slabs in an upright position using only one hand per person. Allows two people to easily lift and maneuver heavy slabs. It is portable, safe and easy to use on job sites or in workshops. Features vulcanized rubber-padded jaws for enhanced grip and slab protection against scratches.





SOLD IN PAIRS



| Model | Length In (mm) | Width In (mm) | Height In (mm) | Grip Range In (mm) | Net Weight Per Pair lbs (kg) | Work Load Limit Per Piece - lbs (kg) |
|--------------|---------------------------------------|-------------------------------------|-------------------------------------|--|------------------------------------|---|
| SHC25 | 7 ¹⁵ / ₁₆ (201) | 4 ³ / ₄ (120) | 7 ⁷ / ₈ (200) | 0 ~ ¹⁵ / ₁₆ (0 ~ 25) | 6.6 (3) | 220 (100) |
| SHC40 | 9 ³ / ₈ (238) | 4 ³ / ₄ (120) | 7 ⁷ / ₈ (200) | ³ / ₁₆ ~ 1 ⁹ / ₁₆ (5 ~ 40) | 6.6 (3) | 220 (100) |

AUSAVINA DOUBLE HANDED CARRY CLAMPS

- Ausavina Double Handed Carry Clamps are designed for the safe, manual lifting and transport of stone slabs-no forklift required. Equipped with fully vulcanized rubber pads for superior grip and to protect slabs from damage.

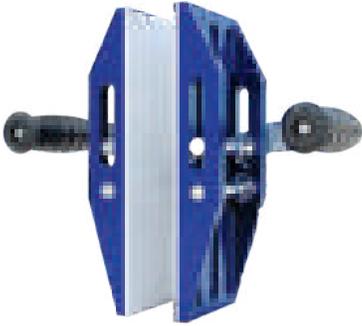

SOLD IN PAIRS

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Grip Range In (mm) | Net Weight Per Pair lbs (kg) | Work Load Limit Per Piece - lbs (kg) |
|--------------|----------------|---------------|----------------|---------------------|------------------------------|--------------------------------------|
| ACC40 | 11 5/16 (288) | 5 3/8 (130) | 9 7/16 (240) | 0 ~ 1 1/16 (0 ~ 40) | 12.1 (5.5) | 550 (250) |
| ACC60 | 13 11/16 (348) | 5 3/16 (132) | 9 7/16 (240) | 0 ~ 2 3/8 (0 ~ 60) | 12.1 (5.5) | 550 (250) |

AUSAVINA DOUBLE HANDED GIANT CARRY CLAMPS

- The Ausavina Double Handed Giant Carry Clamps (ADHGC100) are a convenient tool for manually lifting and transporting small to medium-sized stone slabs-no forklift or additional equipment required.

- Rubber-padded clamp jaws ensure strong gripping force while protecting the slab surface from scratches and damage.



SOLD IN PAIRS

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Grip Range In (mm) | Net Weight Per Pair lbs (kg) | Work Load Limit Per Piece - lbs (kg) |
|-----------------|----------------|---------------|----------------|-----------------------|------------------------------|--------------------------------------|
| ADHGC100 | 20 13/16 (528) | 5 3/8 (136) | 11 7/16 (290) | 0 ~ 3 15/16 (0 ~ 100) | 20.9 (9.5) | 440 (200) |

AUSAVINA DOUBLE HANDED CARRY CLAMPS

- Double Handed Carry Clamps are designed for the safe, manual lifting and transport of stone slabs no forklift truck required.
- Fully vulcanized rubber pads provide enhanced grip and protect the slab surface from damage.
- Eliminating the need for a forklift increases efficiency and flexibility on the job site.
- Multiple Carry Clamps can be used together to move larger slabs with ease.




| Model | Length In (mm) | Width In (mm) | Height In (mm) | Grip Range In (mm) | Net Weight Per Pair lbs (kg) | Work Load Limit Per Pair - lbs (kg) |
|--------|-------------------|------------------|-------------------|-----------------------|------------------------------------|--|
| ACC100 | 15 ½ (394) | 11 ¼ (286) | 7 13/16 (196) | 0 ~ 4 5/16 (0 ~ 110) | 28.6 (13) | 440 (200) |

AUSAVINA BATTERY MULTI MATERIAL VACUUM SUCTION CUP

- A brand-new vacuum suction cup designed for lifting and moving various materials, including glass, stone, metal and plastic, with a capacity of up to 176 lbs (80 kg).
- Features an automatic design with enhanced airtightness, providing superior strength compared to traditional models for easy and efficient operation.



High-quality rubber pad suction cup with strong grip power, various applications and long-lasting durability.




BATTERY OPERATED

Utilized by a battery with 8 working hours for quickly rechargeable and ensuring productivity.




EASY TO USE

One-button design is simple to operate and ensures secure control, while pressure gauge offers added convenience over manual methods.

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|---------|-------------------|------------------|-------------------|------------------------|-----------------------------|
| AMVC200 | 7 7/8 (200) | 7 7/8 (200) | 3 3/8 (85) | 3.74 (1.7) | 176 (80) |

AUSAVINA HAND PUMP VACUUM SUCTION CUP

- The Hand Pump Vacuum Suction Cup is an ideal tool for lifting and moving flat-surfaced materials such as glass, stone, metal, plastic, etc.
- Featuring a hand pump design for quick, easy operation that saves time and effort.

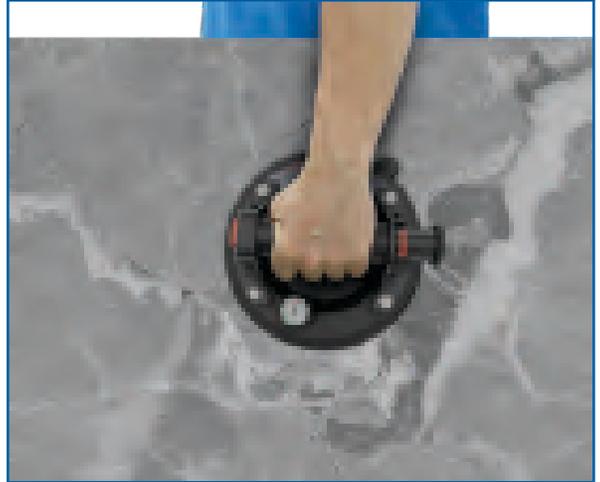


Made of high-quality rubber with a 200 mm diameter, the suction cup delivers strong gripping force and quick adhesion to material surfaces



LIGHTWEIGHT

The product features a compact and convenient design, making it easy to carry and ideal for use in a variety of working environments.

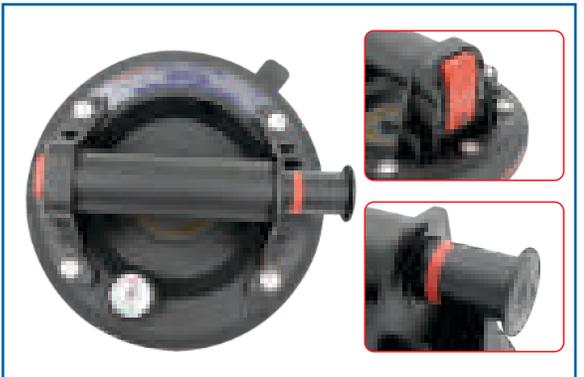

SAFETY

Equipped with a pressure gauge for easy suction control, ensuring user safety and protecting materials from cracking.

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|---------|-------------------|------------------|-------------------|------------------------|-----------------------------|
| AHVC200 | 7 7/8 (200) | 7 7/8 (200) | 3 1/16 (90) | 3.3 (1.5) | 176 (80) |

AUSAVINA DOUBLE/TRIPLE SUCTION LIFTER

- Designed for moving large stone, glass and heavy slabs.
- Strong vacuum is generated by two large suction cups for easy and reliable handling.
- Aluminum alloy handle provides both lightweight convenience and high resistance.


AUSAVINA DOUBLE SUCTION LIFTER

SLD121



AUSAVINA TRIPLE SUCTION LIFTER



SLT128

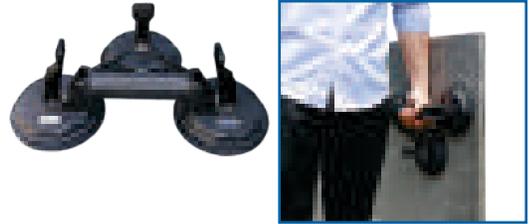

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|--------|--|---------------------------------------|------------------------------------|---------------------|--------------------------|
| SLD121 | 12 ¹⁵ / ₁₆ (329) | 4 ³ / ₄ (120) | 2 ⁷ / ₈ (73) | 2.2 (1) | 198 (90) |
| SLT128 | 12 ¹³ / ₁₆ (326) | 8 ¹⁵ / ₁₆ (227) | 2 ⁷ / ₈ (73) | 3.3 (1.5) | 330 (150) |

AUSAVINA RATCHET SEAM SETTER M2

- The Ausavina Ratchet Seam Setter M2 ensures countertops are perfectly joined and leveled. Equipped with two 8 inch (203 mm) diameter suction cups for strong and reliable performance.
- Features two leveling points to prevent slippage and maintain precision during installation.

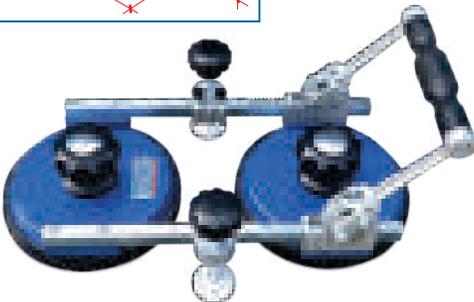

Before



After



| Model | Length (A) In (mm) | Width (B) In (mm) | Height (C) In (mm) | Net Weight lbs (kg) | Cup Diameter In (mm) |
|-------|--|--------------------------------------|-------------------------------------|---------------------|----------------------|
| ARSS2 | 15 ¹⁵ / ₁₆ ~ 19 ⁵ / ₁₆ (405 ~ 490) | 10 ⁷ / ₈ (276) | 8 ⁷ / ₈ (225) | 13.2 (6) | 8 (203) |




AUSAVINA QLI SEAM SETTER WITH SUCTION CUPS

- Ausavina Qli Seam Setter (2x8 or 4x5 Suction Cups) is a new model in the Seam Setter series, designed to boost productivity and ease of use. All suction cups are equipped with lever controls instead of traditional turn-knobs, enabling quick and effortless vacuum activation. Features a knurled roller that allows the operator to easily align slab gaps with precision.

AUSAVINA QLI SEAM SETTER WITH 2X8 SUCTION CUPS

AQSSW2x8


Lightweight & Strong Aluminum
Precise leveling
Reliable hold

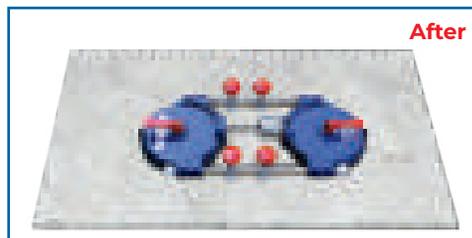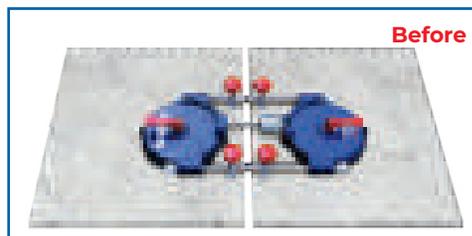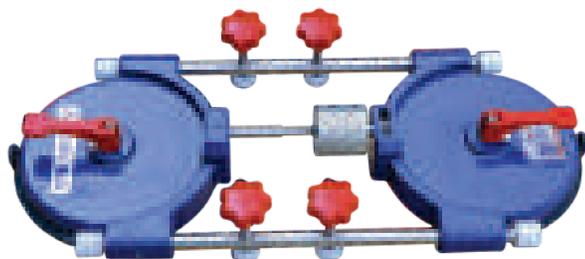

AUSAVINA QLI SEAM SETTER WITH 4X5 SUCTION CUPS

AQSSW4x5

Lightweight, compact,
easy to transport.

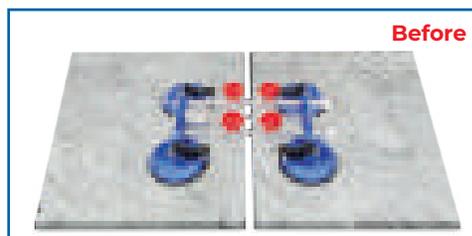


| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) |
|----------|-------------------|------------------|-------------------|------------------------|
| AQSSW2x8 | 22 ¼ (565) | 9 13/16 (250) | 3 9/16 (90) | 12.1 (5.5) |
| AQSSW4x5 | 15 ¾ (400) | 12 3/8 (315) | 3 7/16 (87) | 9.9 (4.5) |


AUSAVINA EZ-PRO BATTERY SEAM SETTER

- Ausavina EZ-Pro Battery Seam Setter (AEBSS12V-M2) is designed for easy adjustment, helping to position and align two slabs by their edges before gluing.
- Features two rectangular suction cups made from soft rubber material, enhancing firm adhesion between the slabs and the suction cups.
- Fully operated by a battery system, with control buttons for Power, Vacuum, Release and Movement functions.


**Removable battery
for quick disassembly
and reassembly**

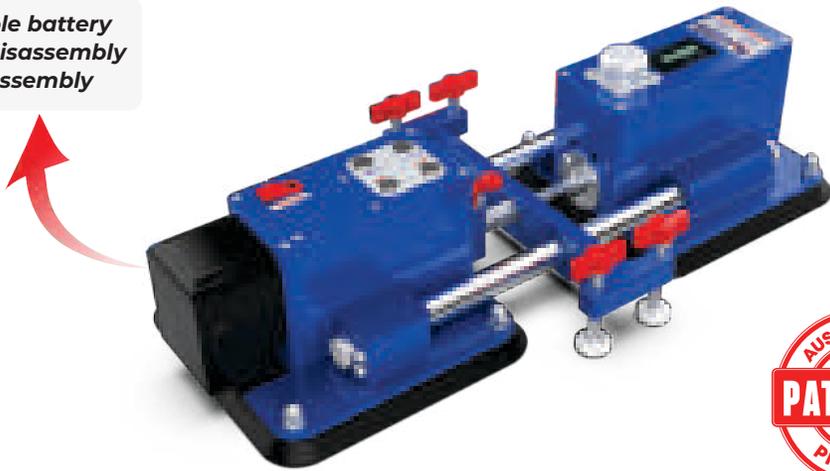

Before

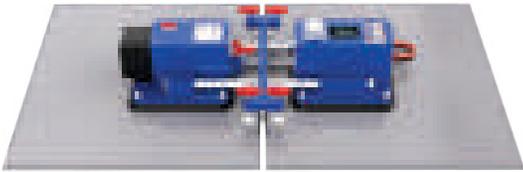

After

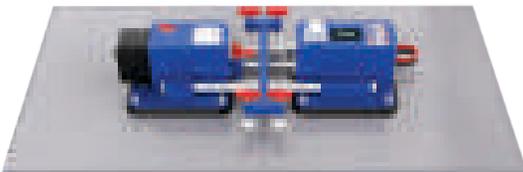


CONTROL PANEL



Fully operated by battery power via a push-button system

PULLING MOTOR



The pulling motor allows independent movement of the two suction cups or the ability to fix their position using the lever adjustment

LEVELING SCREWS



Enable precise fine-tuning of the seam for accurate height alignment


| Model | Length - In (mm) | Width - In (mm) | Height - In (mm) | Net Weight - lbs (kg) | Voltage - (VDC) |
|-------------|------------------|-----------------|------------------|-----------------------|-----------------|
| AEBSS12V-M2 | 20 1/16 (510) | 11 5/16 (288) | 5 9/16 (142) | 18.7 (8.5) | 18V - 4Ah |

AUSAVINA 90 DEGREE PRO SEAM SETTER


- Designed to position and join two stone slabs either horizontally or perpendicularly.
- The Seam Setter can be operated using a vacuum pump kit or a hand pump for secure suction on stone surfaces.
- Equipped with a series of turn-knobs to ensure accurate and precise seam alignment.



A90PSS

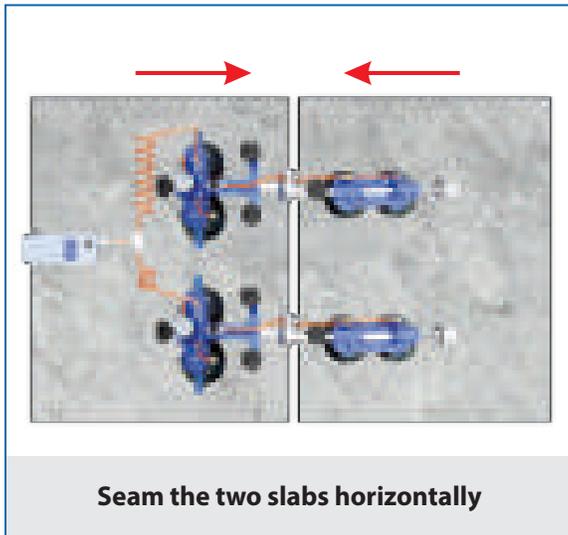

Seam the two slabs horizontally

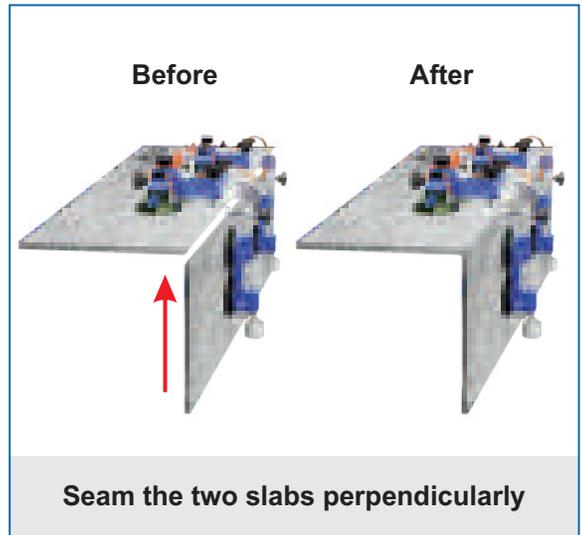

Seam the two slabs perpendicularly

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Rotated Angle |
|--------|-------------------|------------------|-------------------|------------------------|------------------|
| A90PSS | 27 1/8 (689) | 10 3/16 (259) | 5 (127) | 27.5 (12.5) | 0° - 45° - 90° |

AUSAVINA 90 DEGREE CLAMP

- Designed to quickly and securely position and join two stone slabs perpendicularly with mitered or 90° edges before gluing.
- Constructed from durable aluminum with a compact, lightweight design for easy handling and efficient attachment of slabs.





SOLD IN PAIRS



| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight Per Pair - lbs (kg) | Max. Material Height - In (mm) | Max. Material Thickness - In (mm) |
|--------|-------------------|------------------|-------------------|-----------------------------------|-----------------------------------|--------------------------------------|
| A90CM3 | 9 7/16 (240) | 5 3/8 (136) | 13 3/16 (345) | 12.1 (5.5) | 10 3/16 (255) | 1 3/16 (40) |

AUSAVINA COUNTERTOP SLAB SAVER

- With this saver, the kitchen top with sink hole and the thin fragile slab like porcelain can be handled and transported easily.

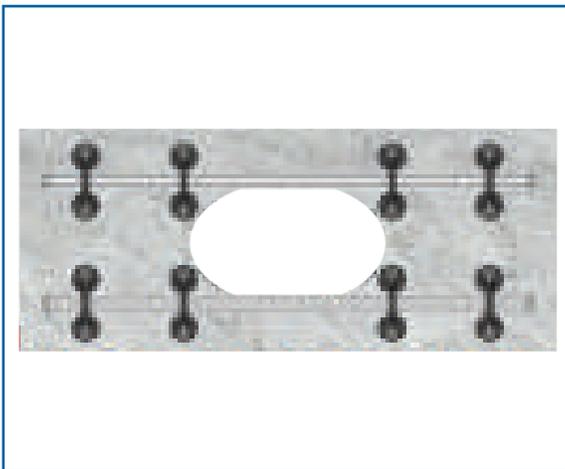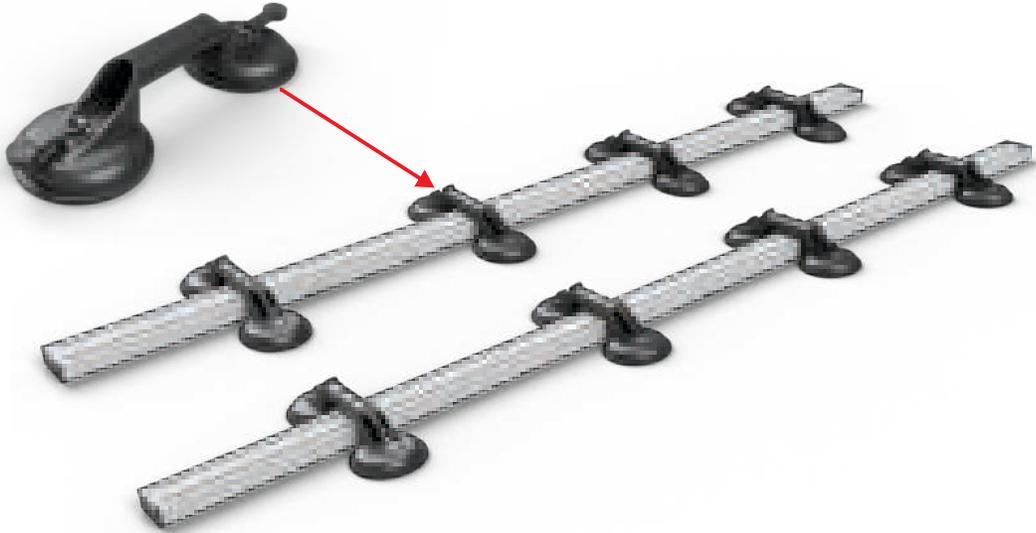

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Number Of Aluminum Bars - (pcs) | Number Of Suction Cups - (pcs) | Net Weight lbs (kg) |
|-------|--|--|--------------------------------------|---------------------------------------|--------------------------------------|------------------------|
| ACS83 | 82 1 ¹ / ₁₆ (2100) | 12 15 ¹ / ₁₆ (330) | 3 1 ¹ / ₈ (79) | 2 | 8 | 44 (20) |

AUSAVINA MITER FIT CLAMP

- An ideal tool for positioning, joining and gluing the two stone slabs perpendicularly.
- Can be easily mounted to any working table.
- AMFC200 consists of three main parts: Sliding rail, Adjustable clamping assembly and Clamp & Suction cups set.
- Knurled knobs accurately position slab and apron.
- Simple to operate, easy to disassemble for storage or transportation.

AMFC200



TABLE IS OPTIONAL



FLEXIBLE

Flexibly combined with many different working table sizes which are available at workshop.





CLAMP & SUCTION CUPS SET

Apply and increase the proper physical force from above to hold the slabs more firmly.



ADJUSTABLE CLAMPING ASSEMBLY

Flexibly designed for many different slab sizes.

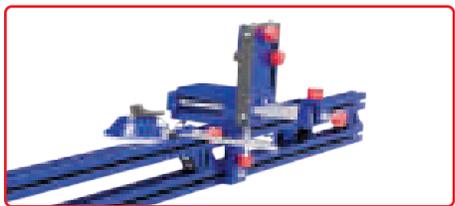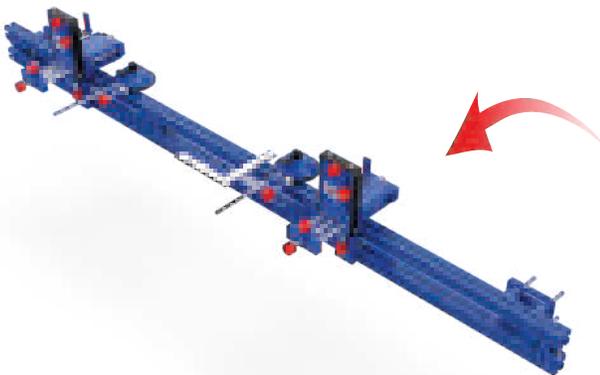

RUBBER STRIP

Prevent the stone slabs from damage or scratches.

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net weight lbs (kg) |
|---------|-------------------|------------------|-------------------|------------------------|
| AMFC200 | 84 5/8 (2150) | 15 5/8 (397) | 13 1/8 (333) | 48.4 (22) |

AUSAVINA MITER SET CLAMP

- It features three main components: Table frame, Adjustable Clamping Pads and Suction Cups.
- Ideal to position, join, glue a mitered slab and a front apron.
- Fits different size slabs and features an extended front apron.
- Slabs contact points have rubber strips for maximum protection.



AMSC120



CLAMP & SUCTION CUPS SET



To join and glue the fascia with the large height.

AMSC150



AMSC200



| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net weight lbs (kg) | Max. Material Height in (mm) | Max. Material Thickness in (mm) | Adjustable Clamping Pads and Suction Cups |
|---------|----------------|---------------|----------------|---------------------|------------------------------|---------------------------------|---|
| AMSC120 | 47 ¾ (1200) | 23 ⅝ (600) | 40 ⅞ (1039) | 88 (40) | 19 11/16 (500) | 2 ⅜ (60) | 4 - 2 |
| AMSC150 | 59 ½ (1500) | 23 ⅝ (600) | 40 ⅞ (1039) | 103.4 (47) | 19 11/16 (500) | 2 ⅜ (60) | 4 - 2 |
| AMSC200 | 78 ¾ (2000) | 23 ⅝ (600) | 40 ⅞ (1039) | 123.2 (56) | 19 11/16 (500) | 2 ⅜ (60) | 4 - 2 |

AUSAVINA SINK LOCK

- Ausavina Sink Lock is specifically designed for positioning and gluing of sink to the countertop. It ensures absolute positioning and secures the work.
- Sink Lock securely supports your sink while the glue is curing and features a quick release lock for easy removal.
- It includes carrying case.

SLS24



SLD48




| Model | Length In (mm) | Width In (mm) | Height In (mm) | Depth Cap In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|-------|-------------------|------------------|-------------------|----------------------|------------------------|-----------------------------|
| SLS24 | 24 3/4 (616) | 5 7/8 (150) | 20 9/16 (523) | 14 3/4 (362) | 5.28 (2.4) | 660 (300) |
| SLD48 | 48 11/16 (1236) | 5 7/8 (150) | 20 9/16 (523) | 14 3/4 (362) | 9.9 (4.5) | 660 (300) |

AUSAVINA POWER KITCHEN PROCESSING TABLE

PKPT6340-PRO



- Made of high-quality aluminum with a high load capacity, it is ideal for moving, lifting and lowering the slabs during the kitchen installation.
- The advanced design features a removable battery and additional support legs, enhancing convenience while optimizing safety for both user and slab.

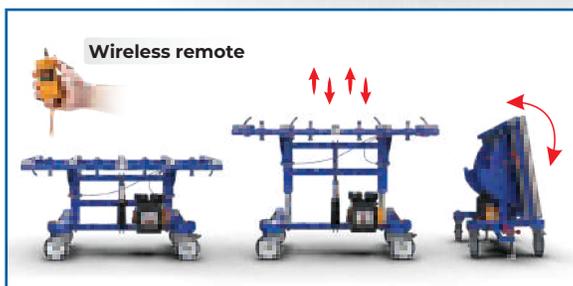


CONVENIENCE

Use a wireless remote to lift and lower slabs quickly at a safe distance. Easily flip the slab from vertical to horizontal.




SMOOTH MOVEMENT

Male rod ends on the surface support to move slabs out of the table more quickly and effortlessly.

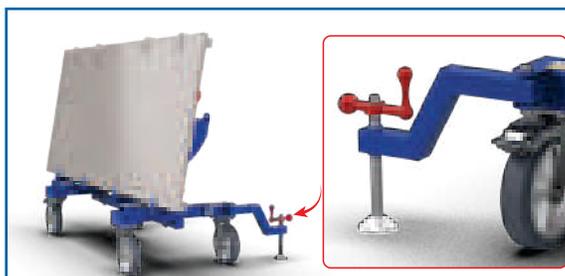

SECURE SUPPORT LEGS

Easily adjust the support legs to secure the table, ensuring safer operation when flipping or rotating large stone slabs.

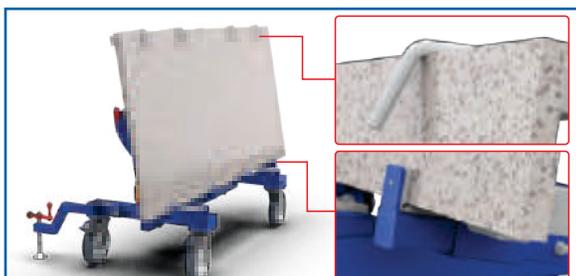

SAFETY

The stone holders secure the slabs to the table during movement, while the plastic strips on the base prevent slipping and damage.

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Minimum Slab Size - In (mm) | Maximum Slab Size - In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|--------------|-------------------|------------------|--------------------------------|--------------------------------|--------------------------------|------------------------|-----------------------------|
| PKPT6340-PRO | 62 15/16 (1600) | 33 1/16 (840) | 32 11/16 - 40 9/16 (830 -1030) | 7 7/8 x 23 5/8 (200 x 600) | 47 1/4 x 86 5/8 (1200 x 2200) | 195.8 (89) | 660 (300) |

AUSAVINA POWER KITCHEN INSTALLATION CART


APKIC7040-PRO



- Made of durable, lightweight aluminum, weighing only 266.2 lbs. It is easy to move and lift materials, making it ideal for kitchen installation.
- Using a removable battery for enhancing flexibility and convenience, ensuring more efficient operation of the cart.




Removable battery

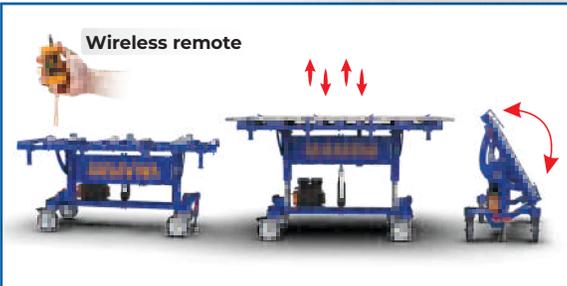

Wireless remote


CONVENIENT

Use wireless remote for lifting, lowering and tilting slabs quickly at a safe distance.

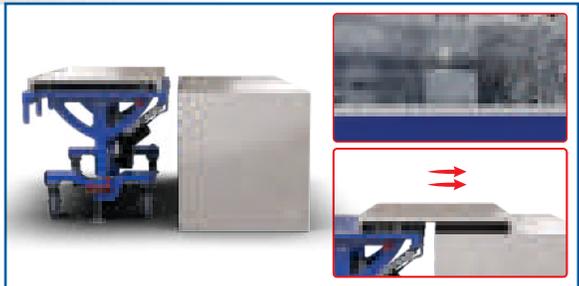

EASY MOVEMENT

Edge sliders support handle slab with raise more easily, reducing labor effort while enhancing material transportation efficiency.

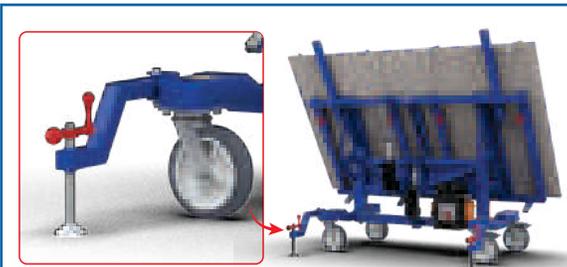

SAFE SUPPORT LEGS

Easily adjust the support legs to secure the cart, ensuring safer operation when flipping or rotating large stone slabs.



Support bars

EFFECTIVE

Support bars keep balance and help to move large slabs more efficiently.

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Minimum Slab Size - In (mm) | Maximum Slab Size - In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|---------------|-------------------|------------------|---------------------------------|--------------------------------|------------------------------------|------------------------|-----------------------------|
| APKIC7040-PRO | 70 7/8 (1800) | 36 3/16 (919) | 33 1/4 ~ 41 1/8 (845 ~ 1045) | 7 7/8 x 23 5/8 (200 x 600) | 51 3/16 x 118 1/8 (1300 x 3000) | 266.2 (121) | 1100 (500) |

AUSAVINA DUAL POLISHED FLIP TABLE



- Flip slabs easily, quickly and safely for more productivity and time - saving.
- The countertop tilts easily to various angles.
- Rubber strips help protect the slabs from damage.

Side 1
Easily flip the stone slab to polish 2 sides with a simple operation
Side 2

EASILY TO POLISH BOTH SIDES OF THE STONE SLAB

Requires 2 people to flip the slab

Only 1 person needed to flip the slab

MORE PRODUCTIVE & TIME-SAVING

Easily and safely flip slabs weighing up to 440 lbs (200kg) with just one person saving labor costs effectively.

Rubber strip

Swivel caster

FLEXIBLE & SAFE

The tilting countertop adjusts to various angles for different needs, ensuring safety for both the slab and the operator.

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Work Load Limit (75 degree tilt) - lbs (kg) | Work Load Limit lbs (kg) |
|----------|-------------------|------------------|-------------------|------------------------|--|-----------------------------|
| APFT7422 | 74 13/16 (1900) | 53 1/16 (1348) | 39 1/8 (994) | 468.6 (213) | 440 (200) | 1100 (500) |

AUSAVINA TILT GLASS CUTTING TABLE

- This table is engineered for easy handling, cutting and operation of large-sized glass, making it ideal for mass production lines.
- It operates smoothly and cost-effectively. With a tilting angle of up to 78°, it functions quietly during tilt operations.



| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|-----------------|-------------------|------------------|-------------------|------------------------|-----------------------------|
| TGCT9878 | 98 7/16 (2500) | 78 7/8 (2004) | 35 13/16 (910) | 554.4 (252) | 1100 (500) |


AUSAVINA WORKING TABLE

- Used to securely hold stone slabs during grinding, polishing and drilling processes.
- Ideally designed for flexible assembly to accommodate the shape and size of each stone slab.
- Can be disassembled into components for easy packing and transport.

AWT7523



AWT7523C: Swivel casters with brakes provide easy maneuvering

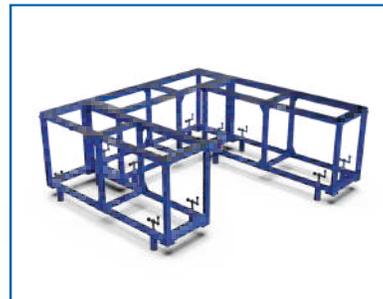

The design is convenient and efficient, can be assembled to suit the shape and size of the stone slab.

| Model | Length In (mm) | Width In (mm) | Height - In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|-----------------|-------------------|------------------|---------------------------------|------------------------|-----------------------------|
| AWT7523 | 75 7/8 (1927) | 23 15/16 (608) | 37 15/16 ~ 40 9/16 (965 ~ 1030) | 162.8 (74) | 4840 (2200) |
| AWT7523C | 75 13/16 (1925) | 23 3/4 (604) | 37 15/16 ~ 40 9/16 (965 ~ 1030) | 184.8 (84) | 4840 (2200) |

AUSAVINA FLEXIBLE WORK TABLE

- Ausavina Flexible Work Table is designed to support slabs during polishing, sharpening, cutting and various other tasks.
- Linking hooks are designed to create multi-way layouts such as Straight, L-shaped, U-shaped suit the shape and size of the stone slabs.
- The top is covered with rubber to protect slabs from being damaged.
- Ausavina Flexible Work Table is easy to assemble and disassemble for transport.

AUSAVINA FLEXIBLE WORK TABLE

AFWT8328



AUSAVINA FLEXIBLE WORK TABLE-4 WHEELS

AFWT8328-4W




| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|--------------------|---------------------------|--------------------------|--|------------------------|-----------------------------|
| AFWT8328 | 83 $\frac{7}{8}$ (2130) | 28 $\frac{9}{16}$ (725) | 37 $\frac{15}{16}$ ~ 40 $\frac{9}{16}$ (965 ~ 1030) | 145.2 (66) | 660 (300) |
| AFWT8328-4W | 84 $\frac{15}{16}$ (2158) | 30 $\frac{11}{16}$ (780) | 39 $\frac{1}{4}$ (992) | 112.2 (51) | 880 (400) |

AUSAVINA EASY ADJUSTABLE FABRICATION STAND/SENI

- The Ausavina Easy Adjustable Fabrication Stand and new Seni version are designed to support slabs during cutting, polishing, sharpening and/or various other tasks.
- The top stand bar is covered by rubber strips to prevent slab surfaces from scratching and chipping.
- The design is versatile and compact so that it can be easily stored or transported.



SOLD IN PAIRS

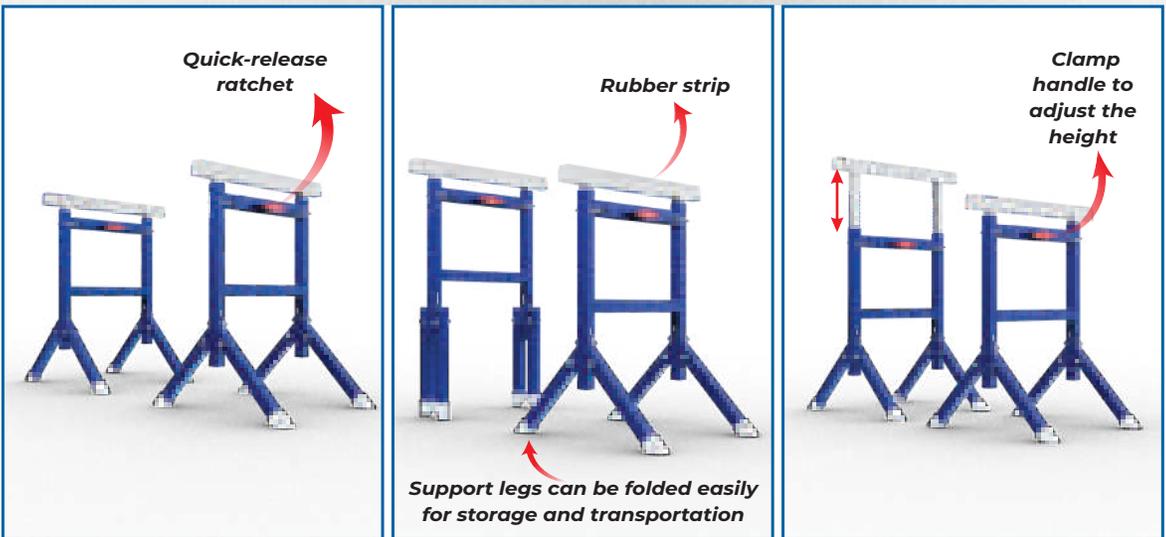

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|-------------------|--|--|---|------------------------|---|
| AEAFS3143 | 25 ¹⁵ / ₁₆ (660) | 23 ¹⁵ / ₁₆ (609) | 32 ¹ / ₄ - 43 ⁹ / ₁₆ (819 - 1107) | 57.2 (26) | 1430 (650) Per Piece 2860 (1300) Per Set |
| AEAFS3143S | 26 ¹ / ₁₆ (662) | 23 ¹³ / ₁₆ (605) | 32 ³ / ₁₆ - 43 ⁹ / ₁₆ (818 - 1106) | 40.7 (18.5) | 660 (300) Per Piece 1320 (600) Per Set |

AUSAVINA FABRICATION STAND

- Ausavina Fabrication Stand is designed to support slabs during cutting, polishing, sharpening and/or various other tasks. Height is adjustable from 31 1/2" (800 mm) to 39 3/8" (1000 mm) for super long slabs it may be advisable to use more than 2 stands to sustain the weight in the middle. The top is covered with rubber to protect slabs from being damaged. It is folded easily for transporting from one place to another.



| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|----------------|----------------|---------------|------------------------------|---------------------|---|
| AFS3139 | 26 1/16 (662) | 18 3/16 (462) | 31 1/2 ~ 39 3/8 (800 ~ 1000) | 61.6 (28) | 1430 (650) Per Piece 2860 (1300) Per Set |

AUSAVINA QLI FOLDABLE TABLE


- Ausavina Qli Foldable Table is used for supporting the slabs during machining, cutting, grinding, polishing or drilling. The height is adjustable from 32 13/16" (833 mm) to 44 1/8" (1121 mm). Articulated connecting links make it possible to adjust the table width exactly to fit to the variations of your slabs.



| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|-----------------|--------------------------------|---------------|--------------------------------|---------------------|--------------------------|
| AQFT7923 | 12 15/16 ~ 78 3/4 (330 ~ 2000) | 25 9/16 (650) | 32 13/16 ~ 44 1/8 (833 ~ 1121) | 92.4 (42) | 3080 (1400) |

AUSAVINA EDGE POLISHING STAND – AUTO LOCK

- EPS60AL is designed for upright slab polishing, helping polishers work more easily and comfortably with better visibility. It delivers efficient results in less time without compromising quality. Featuring double-jaw auto clamping, its rubber-coated clamps provide a strong grip to securely hold even large slabs.

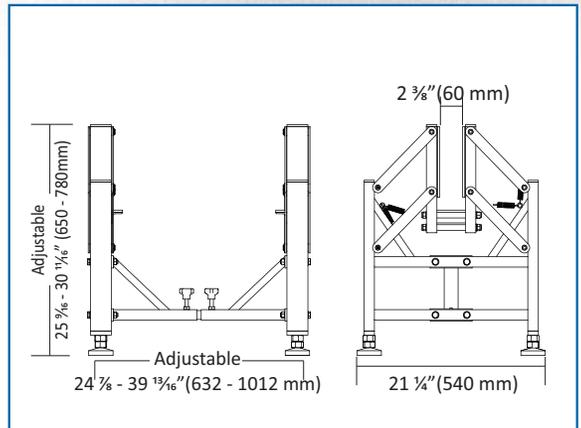

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Max Jaw Opening In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|---------|-----------------------------------|------------------|-----------------------------------|----------------------------|------------------------|-----------------------------|
| EPS60AL | 24 7/8 ~ 39 13/16 (632 ~ 1012) | 21 1/4 (540) | 25 3/16 ~ 30 13/16 (650 ~ 780) | 2 3/8 (60) | 66 (30) | 1650 (750) |

AUSAVINA SLAB DOLLY

- With the compact design, the dolly can move smoothly and easily in narrow working places or over uneven surfaces. The 8" dolly has solid rubber tires and the 11" dolly has pneumatic tires. Rubber vulcanized pad protects slabs from chipping and scratching.

AUSAVINA 8" SLAB DOLLY



AUSAVINA 11" SLAB DOLLY



SD008 - Solid Rubber Tires 8"

SD011 - Pneumatic Tires 11"

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Channel Width In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|-------|----------------|---------------|----------------|-----------------------|---------------------|--------------------------|
| SD008 | 20 1/16 (510) | 9 13/16 (250) | 8 1/16 (205) | 3 1/8 (80) | 19.8 (9) | 660 (300) |
| SD011 | 20 1/16 (510) | 12 3/8 (308) | 10 5/8 (270) | 3 1/8 (80) | 19.8 (9) | 660 (300) |

AUSAVINA 3 WHEEL SLAB DOLLY

- Designed to facilitate slab handling and transporting in work places. Rubber vulcanized pad protect slabs from chipping and scratching. The dolly comes with pneumatic tires and a swivel caster with heavy duty locking brake to provide additional stability and maneuverability in confined spaces.

AUSAVINA 3 WHEEL SLAB DOLLY

AUSAVINA 3 WHEEL GIANT DOLLY



SD013 - Pneumatic Tires 13"

GD013 - Pneumatic Tires 13"

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Channel Width In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|-------|----------------|----------------|----------------|-----------------------|---------------------|--------------------------|
| SD013 | 27 15/16 (710) | 13 3/8 (340) | 13 3/16 (335) | 3 1/8 (80) | 37.4 (17) | 1430 (650) |
| GD013 | 27 15/16 (710) | 14 15/16 (380) | 13 3/16 (335) | 4 3/4 (120) | 35.2 (16) | 1430 (650) |

AUSAVINA 4 WHEEL SLAB DOLLY

- The 4 Wheel Slab Dolly is designed to move stone slabs efficiently around warehouses, construction sites and other work areas. Dolly is equipped with 2 solid rubber tires and 2 swivel casters to operate in a small workspace. Rubber U-shaped vulcanized pad protects slabs from chipping and scratching during transportation.

AUSAVINA 4 WHEEL GIANT DOLLY

GDS003 - Solid Rubber Tires 8"



AUSAVINA 4 WHEEL SLAB DOLLY

SDS003 - Solid Rubber Tires 8"



| Model | Length In (mm) | Width In (mm) | Height In (mm) | Channel Width In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|---------------|--|---------------------------------------|--------------------------------------|---------------------------------------|------------------------|-----------------------------|
| GDS003 | 19 ¹¹ / ₁₆ (500) | 13 ⁷ / ₁₆ (342) | 8 ¹ / ₁₆ (205) | 6 ¹¹ / ₁₆ (170) | 30.8 (14) | 800 (400) |
| SDS003 | 20 ³ / ₁₆ (510) | 9 ¹³ / ₁₆ (250) | 8 ¹ / ₁₆ (205) | 3 ¹ / ₈ (80) | 26.4 (12) | 800 (400) |


AUSAVINA SELF-LOCKING TROLLEY

- These Self-Locking Trolleys are built for heavy-duty use. Vulcanized rubber pads on the V-channel and clamping jaws help prevent damage to the slab. The structure features detachable components, making the trolley easy to disassemble and reassemble for convenient transportation and packaging.

SLT13M2




Pneumatic Tires and A Third Wheel

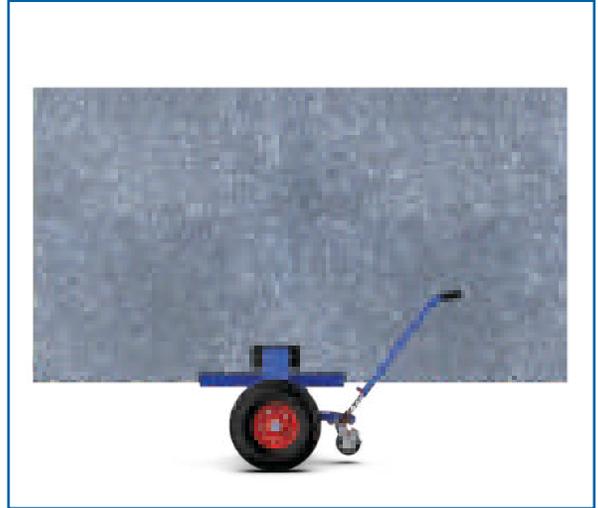

SLT13M3



Pneumatic Tires and A Kickstand

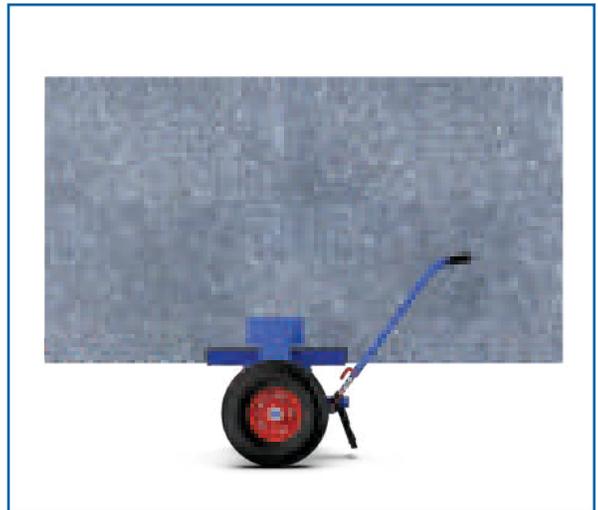

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Grip Range In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|---------|--------------------------|-------------------------|-------------------------|--|------------------------|-----------------------------|
| SLT13M2 | 26 $\frac{3}{8}$ (670) | 22 $\frac{3}{16}$ (563) | 19 $\frac{5}{16}$ (490) | $\frac{3}{8}$ ~ 3 $\frac{15}{16}$ (10 ~ 100) | 70.4 (32) | 1100 (500) |
| SLT13M3 | 20 $\frac{15}{16}$ (533) | 22 $\frac{3}{16}$ (563) | 19 $\frac{5}{16}$ (490) | $\frac{3}{8}$ ~ 3 $\frac{15}{16}$ (10 ~ 100) | 61.6 (28) | 1100 (500) |


AUSAVINA SELF-LOCKING TROLLEY

- Ausavina Self-Locking Trolley is ideal for transporting both small and large slabs (stone, granite, marble, etc.) in warehouses, workshops and construction sites.
- Rubber pads on the clamp plate and V-channel prevent contact damage and keep the slab securely centered on the Self Locking Trolley.
- The gripping force is evenly divided on both sides of the trolley, enhancing the ability securely tighten and hold the slab.

SLT13M6



Easy to take the handle rod out of the trolley.

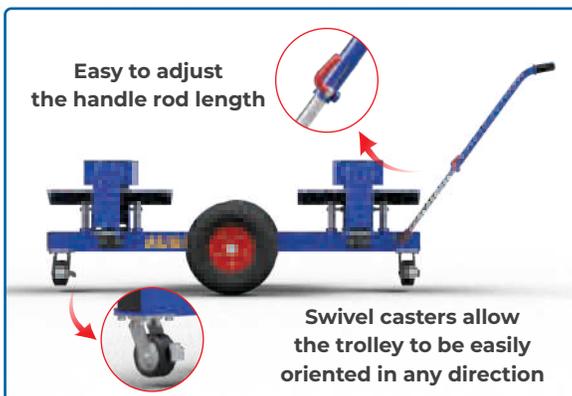

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Grip Range In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|---------|--------------------------|-------------------------|-------------------------|---|---------------------|--------------------------|
| SLT13M6 | 59 $\frac{3}{16}$ (1504) | 20 $\frac{5}{16}$ (516) | 20 $\frac{5}{16}$ (516) | $\frac{3}{8}$ ~ 3 $\frac{15}{16}$ (10 ~ 100) | 112.2 (51) | 1100 (500) |

AUSAVINA SAFETY SLAB DOLLY

- This dolly allows safe in-outdoor transportation with its lever extending slab side support.
- With a lever supporting the material from the base to the top, this dolly can move an object in a safe manner.
- Pneumatic tires are designed to withstand vibration and prevent breakage.



| | |
|-----------------------------------|---|
| Model | SSD35 |
| Length - In (mm) | 35 ⁷ / ₁₆ (900) |
| Width - In (mm) | 20 ¹ / ₂ (520) |
| Height - In (mm) | 64 ¹⁵ / ₁₆ (1650) |
| Slab Thickness - In (mm) | 3 ¹⁵ / ₁₆ (100) |
| Net Weight - lbs (kg) | 77 (35) |
| Work Load Limit - lbs (kg) | 1430 (650) |

SSD35 - Pneumatic Tires 13"

AUSAVINA SELF-LOCKING DOLLY

- Pneumatic tires withstand vibrations, prevent damage and provide easy transportation.
- Built-in self-gripping, compact design, rubber coated contact surfaces for safe in-outdoor operations.



| | |
|-----------------------------------|--|
| Model | SLT60 |
| Length - In (mm) | 12 ⁵ / ₈ (320) |
| Width - In (mm) | 11 ¹ / ₂ (293) |
| Height - In (mm) | 12 ³ / ₈ (314) |
| Grip Range - In (mm) | 0 ~ 2 ³ / ₈ (0 ~ 60) |
| Net Weight - lbs (kg) | 19.8 (9) |
| Work Load Limit - lbs (kg) | 550 (250) |

AUSAVINA TUG DOLLY

- These dollies with their compact structure, are well suited for working in narrow spaces or on rough surfaces.
- Made of aluminum for lightweight with a capacity of up to 990lbs (450kg).
- 4 large solid wheels provide sturdy support and make it easy to handle slabs .


AUSAVINA TUG DOLLY - ATD19



AUSAVINA TUG DOLLY - ATD25



AUSAVINA TUG DOLLY - ATD60

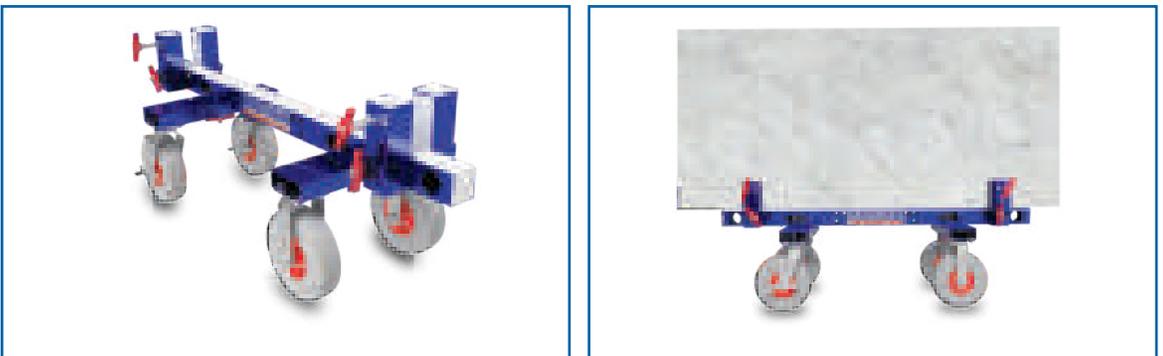

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Grip Range In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|-------|-------------------|------------------|-------------------|-----------------------|------------------------|-----------------------------|
| ATD19 | 24 1/16 (610) | 12 7/8 (327) | 12 1/16 (307) | 0 ~ 2 7/8 (0 ~ 73) | 34.1 (15.5) | 990 (450) |
| ATD25 | 27 15/16 (710) | 15 1/16 (382) | 12 1/16 (307) | 0 ~ 5 1/8 (0 ~ 130) | 35.2 (16) | 990 (450) |
| ATD60 | 60 (1524) | 21 1/2 (546) | 23 3/8 (588) | 0 ~ 2 3/4 (0 ~ 70) | 72.6 (33) | 990 (450) |

AUSAVINA EASY MOVING DOLLY

- The compact design makes it convenient to transport and store stone slabs in confined spaces, effectively optimizing time and labor costs. Constructed from high-grade steel for enhanced durability and sturdiness. Its foldable tube poles allow flexible placement of stone slabs both vertically and horizontally.

AEMD400




Can be placed in vertical and horizontal



CONVENIENT - SAFE

The stone slabs can be placed in vertical or horizontal with foldable tube poles. Rubber strips protect the slabs from damaging or chipping.

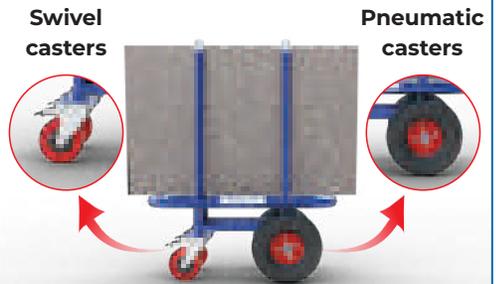


FLEXIBLE

Easy moving on uneven surfaces in different directions by a combination of pneumatic casters and swivel casters.

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|---------|----------------|---------------|----------------|---------------------|--------------------------|
| AEMD400 | 30 1/16 (762) | 17 1/4 (438) | 38 3/16 (970) | 39.6 (18) | 880 (400) |

AUSAVINA EZ-PRO WINCH CART

- AEWC450-M2 is an effective tool for material slabs handling in any working place.
- Vertical moving mechanism features an electric winch and the cart is equipped with a remote control to enhance safety.
- All contact surfaces are rubber coated to secure stability and avoid slabs damage.
- This cart can handle the material slabs weighing up to 990 lbs (450 kg).



| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|------------|-------------------|------------------|----------------------------------|------------------------|-----------------------------|
| AEWC450-M2 | 34 5/8 (880) | 17 1/16 (432) | 67 1/16 - 101 5/16 (1704 - 2574) | 110 (50) | 990 (450) |

| Battery Powered | Maximum Lifting Height - In (mm) | Maximum Stone Width - In (mm) | Maximum Stone Thickness - In (mm) |
|-----------------|-------------------------------------|----------------------------------|--------------------------------------|
| 2x18V / 4Ah | 40 3/16 (1020) | 55 1/8 (1400) | 2 3/4 (70) |

AUSAVINA V-CART

- Ausavina V-Cart is a utility cart designed for storing and transporting slabs/glass sheets easily. Its compact structure is designed with 4 heavy duty swivel casters for easy maneuvering in narrow areas. Ausavina V-Cart enables precise positioning of slabs in any direction for various applications. The rubber-stripped poles can be repositioned in the rubber-stripped base to meet the customers' needs. The rubber strip will protect the material from scratching and chipping. Its durable construction adds stability when handling heavier loads.



| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|----------------|--------------------------------------|--------------------------------------|---|------------------------|-----------------------------|
| AVC3747 | 37 ³ / ₈ (950) | 36 ¹ / ₄ (920) | 47 ¹³ / ₁₆ (1214) | 154 (70) | 2200 (1000) |

AUSAVINA QLI DRYWALL CART 039

- A compact design to fit confined spaces.
- Rubber strips protect the materials from sliding and chipping.
- Two swivel casters allow easy movement in any direction.
- Casters with safe brakes prevent the cart from moving.
- The optimized tilt angle ensures safe and efficient operation.





| Model | Length (A) In (mm) | Width (B) In (mm) | Height (C) In (mm) | (D) In (mm) | (E) In (mm) | Net Weight lbs (kg) | W.L.L. lbs (kg) |
|----------------------|---------------------------------------|--------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|------------------------|--------------------|
| AQDC039-CS-M2 | 39 ³ / ₄ (1010) | 21 ¹ / ₄ (540) | 47 ¹ / ₂ (1206) | 36 ¹ / ₁₆ (915) | 11 ⁹ / ₁₆ (293) | 74.8 (34) | 2200 (1000) |

W.L.L. : Work Load Limit

AUSAVINA NESTING DUAL DRYWALL CART 049

- Designed for easy maneuvering and storing of stone slabs on both sides.
- The rubber strips on the base frame keep the slabs from slipping and chipping.
- The optimized tilt angle ensures safe and efficient operation.
- Creative design allows the carts to be quickly nested into a row when not in use.

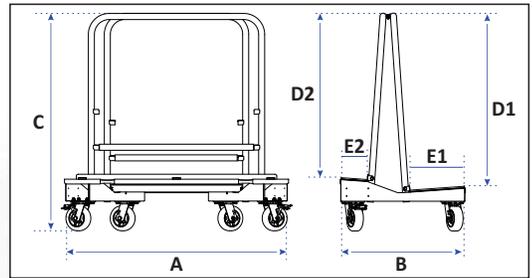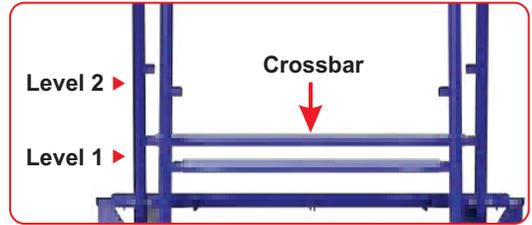

FLEXIBLE FOR VARIOUS SLAB SIZES

Crossbar with two adjustable height levels help to store various slab sizes.



Swivel casters

CONVENIENT AND SPACE SAVING

Unique design allows the carts to be easily nested in a row, keeping your workspace tidy and space-saving when not in use.

| Model | Length (A) In (mm) | Width (B) In (mm) | Height (C) In (mm) | (D1) In (mm) | (E1) In (mm) | (D2) In (mm) | (E2) In (mm) |
|-------------|-----------------------|----------------------|-----------------------|-----------------|-----------------|-----------------|-----------------|
| ANDWC049-M2 | 49 3/4 (1263) | 27 11/16 (703) | 47 5/8 (1210) | 38 7/8 (988) | 12 3/8 (315) | 36 9/16 (928) | 6 1/8 (155) |

| Minimum Slab Size In (mm) | Maximum Slab Size In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|--|--|------------------------|-----------------------------|
| 7 7/8 x 7 7/8 x 1/4 (200 x 200 x 6) | 47 3/4 x 94 1/2 x 1 3/16 (1200 x 2400 x 30) | 83.6 (38) | 2200 (1000) |

AUSAVINA SLAB RACK DOLLY

- Designed for storing and transporting stone slabs or glass sheets easily and quickly.
- A solid base frame allows for dealing with bundle slabs.
- Six poles can be inserted into the base in various layouts to accommodate different slab sizes and can be neatly removed when not in use.
- A removable handle helps with traction and direction.
- The rubber strip on the base protects the material from scratching and chipping.



It can be folded easily for storage and transportation



| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|--------|----------------|----------------|-----------------|---------------------|--------------------------|
| ASRD39 | 43 5/16 (1100) | 25 13/16 (655) | 48 13/16 (1237) | 112.2 (51) | 2200 (1000) |

AUSAVINA FOLDING TROLLEY FRAME

- A compact design that fits through any doorway while ensuring maximum stability. Both the A-Frame and the base are fully lined with rubber strips to protect slabs from chipping and slipping.
- Swivel casters with brakes make it easy to maneuver in any directions.




It can be folded easily for storage and transportation



| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|----------|----------------|---------------|----------------|---------------------|--------------------------|
| AFTF4332 | 43 5/16 (1100) | 23 5/8 (600) | 40 3/16 (1016) | 85.8 (39) | 880 (400) |

AUSAVINA SMART SLAB BUGGY

- Ideal compact buggy for moving slabs in confined spaces.
- 2 large wheels allow for easy movement on uneven surfaces and two casters with brakes provide smooth movement in multiple directions while ensuring stationary positioning when needed.
- For additional safety the buggy has a bar fixed on one side in the middle of the frame to keep slabs steady and plenty of rubber strips to avoid contact damage.

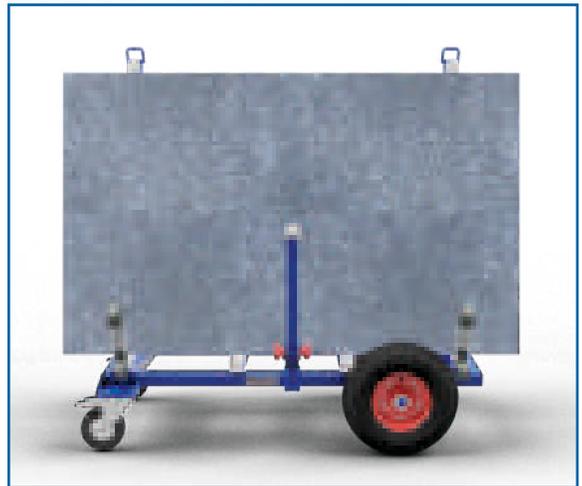


| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|-------------------|---|--|---|------------------------|-----------------------------|
| ASSBG4736P | 46 ⁵ / ₈ (1184) | 24 ¹³ / ₁₆ (630) | 45 ¹¹ / ₁₆ (1160) | 83.6 (38) | 1155 (525) |
| ASSBG4736S | 45 ¹¹ / ₁₆ (1160) | 23 ¹⁵ / ₁₆ (609) | 45 ¹ / ₂ (1155) | 92.4 (42) | 1155 (525) |

P= Pneumatic Back Tires / S = Solid Back Tires

AUSAVINA DOUBLE SIDED SLAB BUGGY

- The Slab Buggy features a large weight for maximum security for materials, all within a compact design.
- Pneumatic wheels easily move on rough surfaces.
- Casters with safety brakes allow for easy movement in multiple directions and ensure stationary positioning when needed.
- Rubber strips on the frame protect and prevent damage to the stone slab.

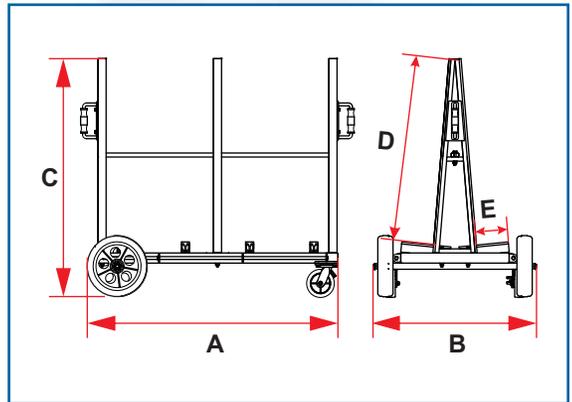


| Model | Length (A) In (mm) | Width (B) In (mm) | Height (C) In (mm) | (D) In (mm) | (E) In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|-------------------|--|--|---|---|--|------------------------|--|
| DSBG1320P | 53 1 ¹ / ₁₆ (1363) | 32 5 ¹ / ₁₆ (820) | 47 1 ¹ / ₁₆ (1195) | 36 1 ⁷ / ₈ (917) | 6 3 ⁴ / ₁₆ (159) | 143 (65) | 880 (400) Per Side 1760 (800) Total |
| DSBG1320S | 53 1 ¹ / ₁₆ (1363) | 31 15 ¹ / ₁₆ (812) | 45 15 ¹ / ₁₆ (1167) | 36 1 ⁷ / ₈ (917) | 6 3 ⁴ / ₁₆ (159) | 169.4 (77) | 1320 (600) Per Side 2640 (1200) Total |
| EDSBG1320P | 42 3 ⁸ / ₁₆ (1076) | 29 15 ¹ / ₁₆ (760) | 45 15 ¹ / ₁₆ (1168) | 36 3 ¹ / ₁₆ (919) | 6 5 ¹ / ₁₆ (160) | 101.2 (46) | 660 (300) Per Side 1320 (600) Total |
| EDSBG1320S | 42 3 ⁸ / ₁₆ (1076) | 29 1 ⁷ / ₈ (740) | 46 1 ⁷ / ₈ (1175) | 36 3 ¹ / ₁₆ (919) | 6 5 ¹ / ₁₆ (160) | 107.8 (49) | 880 (400) Per Side 1760 (800) Total |

* Solid Rubber Tire (S) * Pneumatic tires (P)

AUSAVINA DOUBLE SIDED SLAB BUGGY

- Designed to transport slabs in warehouses, especially in confined spaces with maximum stability.
- Equipped with two large wheels for easy movement on uneven surfaces (especially P models) and two casters with brakes for smooth movement in multiple directions, as well as stationary positioning when needed.
- For added safety, the 2640 models feature four bars fixed on both sides in the middle of the frame to secure slabs, along with plenty of rubber strips to prevent any contact damage.

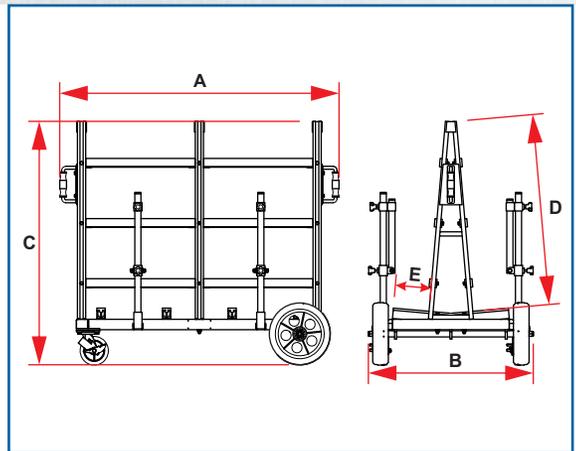

| Model | Length (A) In (mm) | Width (B) In (mm) | Height (C) In (mm) | (D) In (mm) | (E) In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|------------------|-----------------------|----------------------|-----------------------|----------------|----------------|------------------------|--|
| DSBG2640P | 53 11/16 (1363) | 30 13/16 (782) | 45 13/16 (1164) | 36 1/16 (916) | 6 1/2 (165) | 198 (90) | 1320 (600) Per Side 2640 (1200) Total |
| DSBG2640S | 53 11/16 (1363) | 31 3/4 (806) | 46 1/8 (1172) | 36 1/16 (916) | 6 1/2 (165) | 222.2 (101) | 1320 (600) Per Side 2640 (1200) Total |

* Solid Rubber Tire (S) * Pneumatic tires (P)

AUSAVINA SLAB BUGGY

- The Slab Buggy is made of steel for sturdy and durable. The structure of two A-Frames parallel on both sides to transport stone slabs firmly and securely.
- Equipped with two large wheels for easy movement on uneven surfaces (easier with pneumatic tires) and two casters with brakes for smooth movement in multiple directions, as well as stationary positioning when needed.
- For additional safety, Model 2640 features two bars fixed on one side in the middle of the frame to keep slabs steady, along with plenty of rubber strips to avoid contact damage, (SBG800P/S) models also include two ratchet straps for enhanced stability.

SBG800



SBG2640



| Model | Length (A) In (mm) | Width (B) In (mm) | Height (C) In (mm) | (D) In (mm) | (E) In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|----------|-----------------------|----------------------|-----------------------|----------------|----------------|------------------------|-----------------------------|
| SBG800S | 48 13/16 (1240) | 26 11/16 (678) | 46 1/8 (1171) | 36 5/8 (930) | 7 1/4 (184) | 132 (60) | 2200 (1000) |
| SBG800P | 48 13/16 (1240) | 26 11/16 (678) | 47 3/16 (1199) | 36 5/8 (930) | 7 1/4 (184) | 107.8 (49) | 1100 (500) |
| SBG2640S | 47 5/8 (1210) | 28 3/8 (720) | 46 15/16 (1192) | 36 3/4 (934) | 7 3/16 (183) | 151.8 (69) | 2640 (1200) |
| SBG2640P | 49 5/8 (1260) | 28 3/8 (720) | 46 7/8 (1190) | 36 3/4 (934) | 7 3/16 (183) | 132 (60) | 2640 (1200) |

* Solid Rubber Tire (S) * Pneumatic tires (P)

AUSAVINA QLI SLAB BUGGY

- A simple and compact design for transporting stone slabs and other sheet materials across factories or construction sites. Swivel casters with locking brakes are offset outside the steel frame for added stability. Pneumatic tires allow easy transport on rough or any surfaces. Rubber strips on the A-Frame and the base protect the materials from chipping and damage.

AUSAVINA QLI SLAB BUGGY

AQSBG1320



AUSAVINA QLI DOUBLE SIDED SLAB BUGGY

AQDSBG1320



| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|-------------------|--|---------------------------------------|---|------------------------|-----------------------------|
| AQSBG1320 | 49 ⁵ / ₈ (1260) | 24 ³ / ₈ (612) | 44 ³ / ₄ (1137) | 79.2 (36) | 1320 (600) |
| AQDSBG1320 | 52 ⁵ / ₁₆ (1328) | 31 ⁵ / ₁₆ (796) | 44 ¹⁵ / ₁₆ (1141) | 121 (55) | 1320 (600) |

AUSAVINA UNIVERSAL SLAB BUGGY

- These buggies are compact enough to pass through standard-sized doors, yet strong enough to easily and safely move slab weighing up to 5500 lbs (2500 kg).
- Four high-quality swivel casters with brakes allow quick and easy maneuvering.
- Securing arms are equipped to protect slabs during operation or to hold outer slabs in place when picking up any inner ones.

USB6WM



USB6WL



| Model | Length (A) In (mm) | Width (B) In (mm) | Height (C) In (mm) | (D) In (mm) | (E) In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|--------|-----------------------|----------------------|-----------------------|-----------------|----------------|------------------------|-----------------------------|
| USB6WM | 59 1/16 (1500) | 29 3/8 (740) | 58 13/16 (1490) | 48 13/16 (1236) | 8 3/8 (207) | 231 (105) | 5500 (2500) |
| USB6WL | 70 7/8 (1800) | 29 3/8 (740) | 67 13/16 (1720) | 58 9/16 (1487) | 7 7/8 (200) | 270.6 (123) | 5500 (2500) |

AUSAVINA FLEXIBLE TRANSPORT CART


- AFTC5947 is a simple and solid structure to store and transport materials up to 352 lbs (160 kg).
- Rubber strips protect the materials from scratching and falling.
- Components and parts are detachable to save storage space and easy transportation.



Swivel casters with safety brakes for easy maneuvering in any direction.



Durable and lightweight **aluminum alloy frame** with compact design.

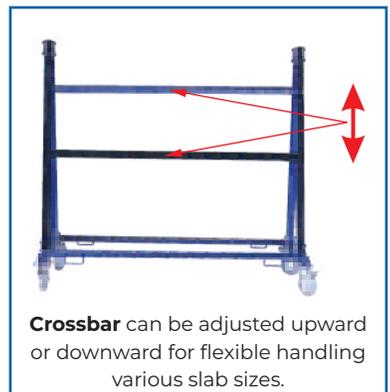

Crossbar can be adjusted upward or downward for flexible handling various slab sizes.

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|-----------------|-------------------|------------------|-------------------|------------------------|-----------------------------|
| AFTC5947 | 62 ½ (1588) | 23 ⅝ (600) | 54 ⅝ (1380) | 79.2 (36) | 352 (160) |

AUSAVINA OVERSIZED GLASS TRANSPORT CART

- The Oversized Glass Transport Cart is able to assemble and disassemble easily for packing and transporting to desired areas.



Used to transport and store various glass sheet sizes, especially for large glass doors.



Safety brake

Swivel casters with safety brakes increase security to move in any direction.



2 safety bars per each side secure glass sheets during transportation avoiding to slip.

| Model | Length In (mm) | Width In (mm) | Height In (mm) | (D) In (mm) | (E) In (mm) | Net Weight lbs (kg) | Work Load Limit - lbs (kg) |
|-------------------|-------------------|------------------|-------------------|----------------|----------------|------------------------|-------------------------------|
| AOGTC11879 | 119 1/16 (3024) | 43 1/16 (1110) | 95 3/8 (2422) | 79 1/16 (2008) | 10 9/16 (268) | 649 (295) | 3300 (1500) |

AUSAVINA HEAVY DUTY MULTI-UTILITY TRANSPORT TRAILER

- A unique trailer to store and transport stone slabs or other flat materials around warehouses and factories.
- Applicable for many material such as stone, glass, porcelain, marble, steel, wood, etc in different sizes.




| | | |
|--|---|---|
| | | |
| <p>MODERN DESIGN</p> | <p>SAFE</p> | <p>EFFICIENT</p> |
| <p>U-Frames can be removed and repositioned to suit the number and sizes of slabs.</p> | <p>Versatile and sturdy casters with brakes for safely maneuvering large material slabs in any work area.</p> | <p>Integrated with the handle to easily pull or push the trailer by manual or forklift truck.</p> |

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|---------|-----------------|----------------|----------------|---------------------|--------------------------|
| AMUTT19 | 119 3/16 (3027) | 42 5/16 (1075) | 61 3/4 (1569) | 913 (415) | 3300 (1500) |

AUSAVINA HEAVY MULTI-PURPOSE TRANSPORT TRAILER

- A unique trailer to store and transport stone slabs or other flat materials around warehouses and factories.
- Applicable for many material such as stone, glass, porcelain, marble, steel, wood, etc in different sizes.

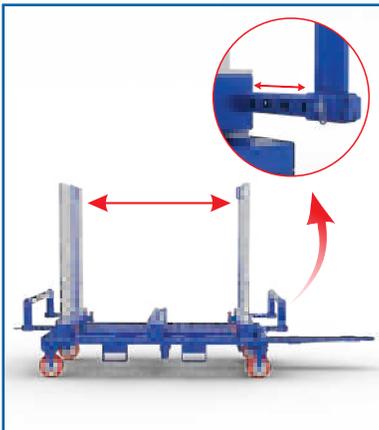

FLEXIBLE

Easy to adjust the distance between two A-Frames to suit different material slab sizes.



PRODUCTIVE

Versatile and solid casters with brakes to maneuver large material slabs in any working area safely.



CONVENIENT

Integrated with the handle to easily pull or push the trailer by manual or forklift truck.

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|-----------------|-------------------|------------------|-------------------|------------------------|-----------------------------|
| AMPT9743 | 97 3/8 (2473) | 43 5/16 (1100) | 67 1/16 (1703) | 706.2 (321) | 3300 (1500) |


AUSAVINA FLAT STACKING CART

- Ideal cart for storing and transporting thin material such as porcelain slabs at a construction site or in a warehouse.
- With smart design and high capacity, it helps to optimize your working space and increase productivity.

AFSC060




Stackable for optimizing space when not in use or loading slabs

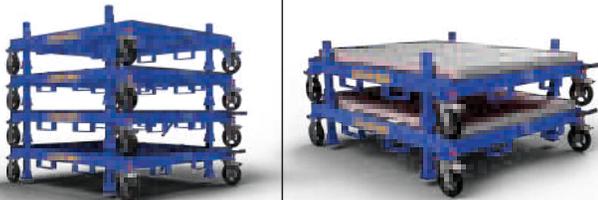

CONVENIENT AND SPACE SAVING

The carts can easily be stacked on top for your workplace tidier when storing or loading slabs.

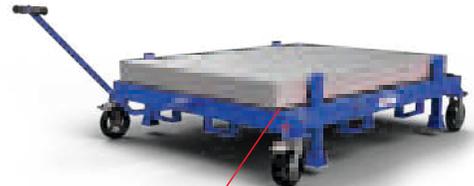


HIGH PROTECTION

Rubber strips covered on the frame surface protect the slabs or sheets from cracking or chipping off during moving.


| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|---------|-------------------|------------------|-------------------|------------------------|-----------------------------|
| AFSC060 | 104 7/16 (2653) | 59 1/16 (1500) | 33 1/8 (841) | 187 (85) | 2200 (1000) |

AUSAVINA NESTING SINGLE SIDED CART

- Excellent equipment for storing and transporting large slabs in warehouses, factories or construction sites especially in narrow space.
- The device is made of steel and can be easily assemble and disassemble for packing and transporting to desired areas.

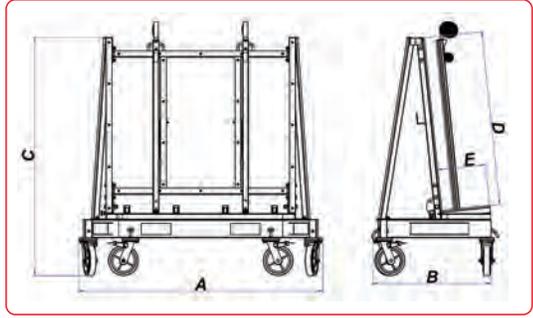

Swivel casters

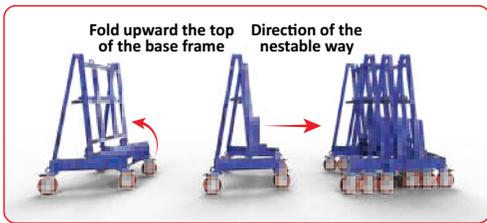

SIMPLE AND SPACE OPTIMIZATION

Unique design that helps the carts can be folded and nested easily to make your workplace tidy when not in use.



MORE SAFETY

The high-quality rubber strip and the ratchet securing bars will protect the slabs perfectly from damage during moving.

| Model | Length In (mm) | Width In (mm) | Height In (mm) | (D) In (mm) | (E) In (mm) | Net Weight lbs (kg) | Work Load Limit - lbs (kg) |
|---------|----------------|---------------|----------------|----------------|--------------|---------------------|----------------------------|
| NSC6432 | 64 7/16 (1637) | 31 1/4 (793) | 62 3/16 (1575) | 45 3/16 (1147) | 14 1/2 (368) | 195.8 (89) | 2200 (1000) |

AUSAVINA HEAVY DUTY FOLDING ONE STOP A-FRAME

- Designed for transporting and storing stone slabs in warehouses, factories or construction sites.
- The A-Frames are connected by the crossbar for ensuring a rigid structure.

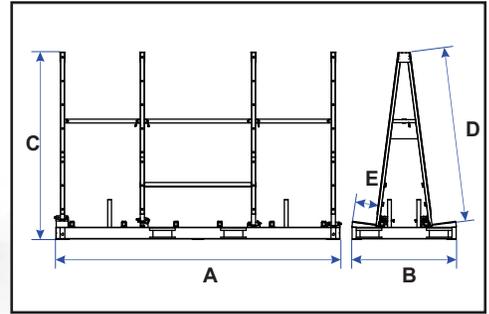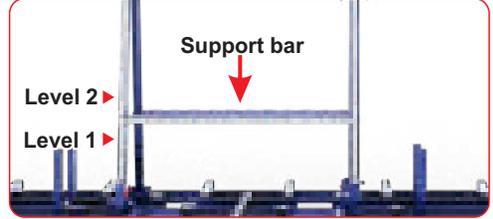

FLEXIBLE FOR VARIOUS SLAB SIZES

Support bars with two adjustable height levels help to store various slab sizes.



Stackable for optimizing space when not in use

CONVENIENT AND SPACE SAVING

Simple design for easy to use, fold, stackable to save space and convenient for transporting with only one package.

| Model | Length (A) In (mm) | Width (B) In (mm) | Height (C) In (mm) | (D) In (mm) | (E) In (mm) |
|-------------|-----------------------|----------------------|-----------------------|----------------|----------------|
| AHFOSA11872 | 118 1/8 (3000) | 43 5/16 (1100) | 76 5/8 (1947) | 71 3/16 (1808) | 9 11/16 (246) |

| Model | Net Weight lbs (kg) | Work Load Limit Per Side - lbs (kg) | Work Load Limit Both Sides - lbs (kg) |
|-------------|------------------------|--|--|
| AHFOSA11872 | 363 (165) | 8800 (4000) | 17600 (8000) |

AUSAVINA FOLDING ONE-STOP A-FRAME

- Designed for storing and transporting stone slabs in warehouses, factories and construction sites.
- Made of rigid steel structure to replace wood storage frame for durability and cost-saving.
- Lightweight structure with high bearing capacity for increasing stability and productivity.

FOSA11872-AC

* Minimum slab size:
78 3/4" x 23 5/8" (2000 x 600 mm)

* Maximum slab size:
135 1/16" x 82 1 3/16" (3430 x 2100 mm)




SPACE-SAVING

Convenient design to use, fold and stackable to optimize storing area and transport with only one package.



SAFE

Rubber strips on the A-Frame and four stoppers fix stone slabs safely when transporting.

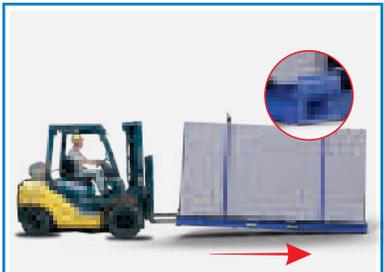

INNOVATIVE



The base frame has plastic strips to prevent scratching for the floor when moving the frame with a forklift truck.

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | W.L.L* Per Side lbs (kg) | W.L.L* Both Sides lbs (kg) |
|--------------|-----------------|---------------|----------------|---------------------|--------------------------|----------------------------|
| FOSA11872-AC | 137 5/16 (3487) | 39 3/8 (1000) | 77 3/16 (1960) | 354.2 (161) | 5500 (2500) | 11000 (5000) |

*: Work load limit

AUSAVINA FOLDING ONE-STOP A-FRAME

- Designed for transporting and storing stone slabs in warehouses, factories or construction sites.
- The A-Frames are connected by the crossbar for ensuring a rigid structure.

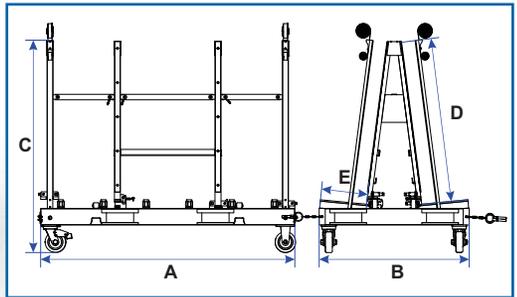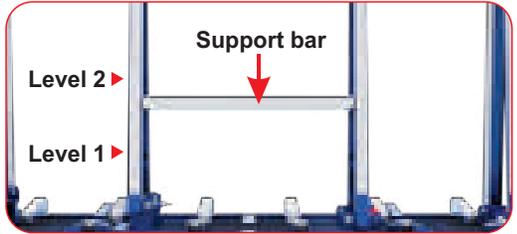

FLEXIBLE FOR VARIOUS SLAB SIZES

Support bars with two adjustable height levels help to store various slab sizes.



HIGH PROTECTION

Rubber strips covered on the frame surface protects the slabs or sheets from cracking or chipping off during moving.



| Model | Length (A) In (mm) | Width (B) In (mm) | Height (C) In (mm) | (D) In (mm) | (E) In (mm) | Net Weight lbs (kg) |
|-----------------|-----------------------|----------------------|-----------------------|----------------|----------------|------------------------|
| FOSA7547 | 73 5/8 (1870) | 43 5/16 (1100) | 60 1/4 (1531) | 46 3/4 (1187) | 13 1/16 (332) | 336.6 (153) |

| Minimum Slab Size In (mm) | Maximum Slab Size In (mm) | W.L.L with Casters - lbs (kg) | W.L.L Per Side W/o Casters - lbs (kg) | Stationary w/o Casters - lbs (kg) |
|---------------------------------|-----------------------------------|----------------------------------|--|--------------------------------------|
| 7 7/8 x 11 13/16 (200 x 300) | 59 1/16 x 94 1/2 (1500 x 2400) | 4400 (2000) | 8800 (4000) | 17600 (8000) |

AUSAVINA FOLDING ONE-STOP A-FRAME

- Designed for transporting and storing stone slabs in warehouses, factories or construction sites.
- The A-Frames are connected by the crossbar for ensuring a rigid structure.

FOSA8759

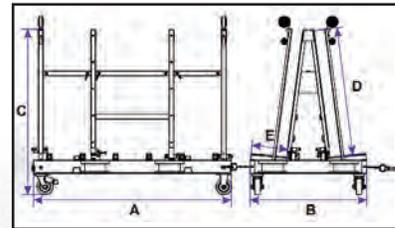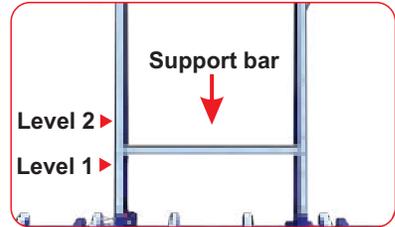

FLEXIBLE FOR VARIOUS SLAB SIZES

Support bars with two adjustable height levels help to store various slab sizes.



HIGH PROTECTION

Rubber strips covered on the frame surface protects the slabs or sheets from cracking or chipping off during moving.


| Model | Length (A) In (mm) | Width (B) In (mm) | Height (C) In (mm) | (D) In (mm) | (E) In (mm) | Net Weight lbs (kg) |
|-----------------|-----------------------|----------------------|-----------------------|----------------|----------------|------------------------|
| FOSA8759 | 86 15/16 (2208) | 43 5/16 (1100) | 72 1/16 (1831) | 58 9/16 (1487) | 12 15/16 (329) | 377.3 (171.5) |

| Minimum Slab Size In (mm) | Maximum Slab Size In (mm) | Capacity with Casters - lbs (kg) | Capacity with Stationary (One Side) lbs (kg) | Stationary w/o Casters - lbs (kg) |
|--|--|-------------------------------------|--|--------------------------------------|
| 15 3/4 x 7 7/8 x 3/8 (400 x 200 x 10) | 106 5/16 x 70 3/4 x 1 9/16 (2700 x 1785 x 40) | 4400 (2000) | 8800 (4000) | 17600 (8000) |



AUSAVINA ONE STOP A-FRAME

- An ideal A-Frame for transporting and storing stone slabs or glass sheets in storage facilities, factories and construction sites. Straps and four rubber-covered securing bars protect the material from slipping and damage. The A-Frame can be separated from the base frame for flexible storage and transport of the material.


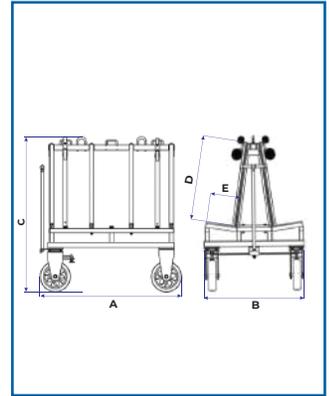


***: Work load limit**

| Model | Length (A) In (mm) | Width (B) In (mm) | Height (C) In (mm) | (D) In (mm) | (E) In (mm) | Net Weight lbs (kg) | W.L.L. with Casters - lbs (kg) | Stationary W/o Casters - lbs (kg) | Lifting with Eyelets - lbs (kg) |
|----------------|-----------------------|----------------------|-----------------------|------------------|------------------|------------------------|-----------------------------------|--------------------------------------|------------------------------------|
| OSA4932 | 55 3/8 (1405) | 39 3/16 (995) | 60 1/4 (1530) | 32 7/16 (824) | 12 1/16 (305) | 380.6 (173) | 2640 (1200) | 7700 (3500) | 2640 (1200) |

AUSAVINA DEMOUNTABLE FRAME

- Designed to store and transport stone slabs or other sheet materials in warehouses, construction sites at a safe distance from the ground. Rubber strips coated on the base frame support to prevent slipping and protect against contact damage.

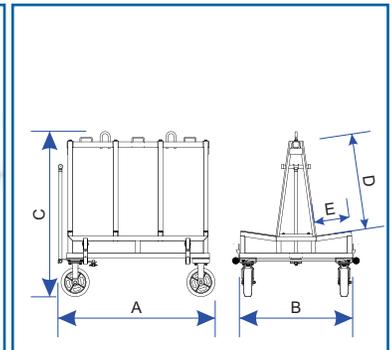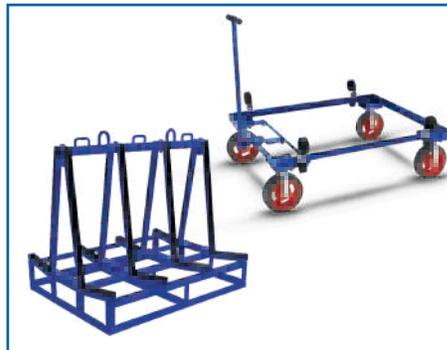

***: Work load limit**

| Model | Length (A) In (mm) | Width (B) In (mm) | Height (C) In (mm) | (D) In (mm) | (E) In (mm) | Net Weight lbs (kg) | W.L.L. with Casters - lbs (kg) | Stationary w/o Casters - lbs (kg) | Lifting with Eyelets - lbs (kg) |
|----------------|-----------------------|----------------------|-----------------------|------------------|-----------------|------------------------|-----------------------------------|--------------------------------------|------------------------------------|
| ADF4932 | 54 1/2 (1385) | 39 3/16 (995) | 56 3/8 (1432) | 32 7/16 (827) | 12 1/8 (308) | 254.1 (115.5) | 2200 (1000) | 4400 (2000) | 2200 (1000) |

AUSAVINA ONE STOP HIGH A-FRAME



- The Ausavina One Stop High A-Frame is designed to store and transport stone slabs or glass sheets at a safe distance from the ground. Its base has forklift slots on the two longest sides and plenty of rubber strips to prevent material from chipping off. Suitable to work with both glass and stone slabs. Easy to disassemble and re-assemble for shipping or storage. Has 4 casters for easy movement, two with brake to lock the frame steady to the ground when needed.



Note: Distribute Slabs/Glass Sheets Equally on Both Sides.

| Model | Length (A) In (mm) | Width (B) In (mm) | Height (C) In (mm) | (D) In (mm) | (E) In (mm) | Net Weight lbs (kg) | Capacity with Casters - lbs (kg) | Stationary W/o Casters - lbs (kg) |
|----------|-----------------------|----------------------|-----------------------|-----------------|------------------|------------------------|-------------------------------------|--------------------------------------|
| OSHA7236 | 65 3/8 (1660) | 43 5/16 (1100) | 62 15/16 (1598) | 35 3/4 (908) | 17 3/16 (433) | 314.6 (143) | 4400 (2000) | 5500 (2500) |



AUSAVINA ONE STOP SINGLE SIDED A-FRAME

- SSA7247-M3 is a single sided A-Frame. Its base has forklift slots on 2 longest sides. It has plenty of rubber strips and two ratchet securing bars to keep slabs steady and safe. Suitable to work with both glass and stone slabs. Easy to disassemble and reassemble for shipping or storage.




Minimum slab size: 7 7/8" - 11 13/16" (200 mm x 300 mm)
Maximum slab size: 59 3/16" - 94 1/2" (1500 mm x 2400 mm)

| Model | Length (A) In (mm) | Width (B) In (mm) | Height (C) In (mm) | (D) In (mm) | (E) In (mm) | Net Weight lbs (kg) | Capacity with Casters - lbs (kg) | Stationary w/o Casters - lbs (kg) |
|------------|-----------------------|----------------------|-----------------------|-------------------|------------------|------------------------|-------------------------------------|--------------------------------------|
| SSA7247-M3 | 73 15/16 (1878) | 25 9/16 (650) | 61 9/16 (1563) | 46 9/16 (1183) | 11 3/16 (284) | 231 (105) | 4400 (2000) | 15400 (7000) |


AUSAVINA SMART ONE STOP A-FRAME

- A very safe Smart One Stop A-Frame to move slabs, it has plenty of rubber strips and ratchet securing bars to hold loads steady and protect slab from damage or scratches. The base has wide slots for simple forklift use. Equipped with casters for easy movement, including two with brake to securely lock the frame in place when needed. Fully dismountable for convenient transport or storage.

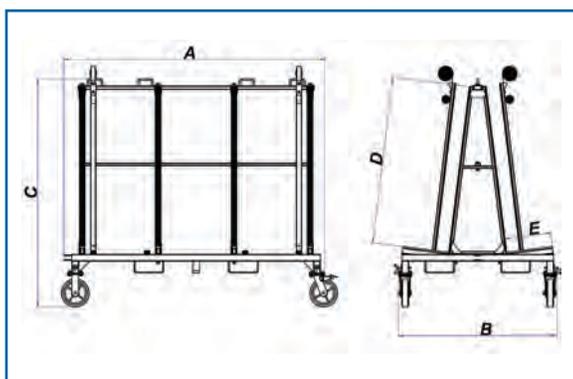

| Model | Length (A) In (mm) | Width (B) In (mm) | Height (C) In (mm) | (D) In (mm) | (E) In (mm) | Net Weight lbs (kg) | Capacity with Casters - lbs (kg) | Stationary w/o Casters - lbs (kg) |
|----------|-----------------------|----------------------|-----------------------|--------------------|-------------------|------------------------|-------------------------------------|--------------------------------------|
| SOSA7247 | 74 1/2 (1892) | 45 3/4 (1150) | 64 1/16 (1626) | 46 11/16 (1186) | 13 3/8 (340) | 279.4 (127) | 3300 (1500) | 11000 (5000) |
| SOSA7263 | 74 1/2 (1892) | 45 3/4 (1150) | 79 3/4 (2025) | 62 1/8 (1578) | 13 15/16 (354) | 301.4 (137) | 3300 (1500) | 11000 (5000) |
| SOSA8763 | 90 1/4 (2292) | 45 3/4 (1150) | 79 1/2 (2019) | 62 9/16 (1589) | 11 9/16 (294) | 363 (165) | 3300 (1500) | 11000 (5000) |
| SOSA9679 | 96 7/8 (2460) | 47 1/4 (1200) | 95 1/16 (2428) | 78 1/16 (1982) | 13 7/16 (342) | 393.8 (179) | 3300 (1500) | 11000 (5000) |

- This Pro version A-Frame features 4 safety bars, 4 ratchet securing bars with straps and special rubber strips for max slab protection during transport. Suitable for use with both glass and stone slabs. The upper bar of the frame has eyelets for crane lifting, the base has slots for simple forklift use. Has 2 casters with brake to lock the frame steady to the ground when needed. Four removable casters help maximize efficiency work and increase productivity.

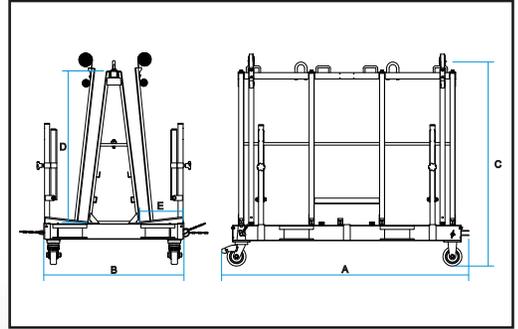

NEW IMPROVEMENT



NEW SOLUTION

New solution stores small slabs easily with support bar.



FLEXIBLE FOR VARIOUS SLAB SIZES

Support bars with two adjustable height levels help to store various slab sizes.

Note: Distribute Slabs/Glass Sheets Equally on Both Sides.

| Model | Length (A) In (mm) | Width (B) In (mm) | Height (C) In (mm) | (D) In (mm) | (E) In (mm) |
|---------------|-----------------------|----------------------|-----------------------|-----------------|----------------|
| OSA7247PRO-M3 | 73 15/16 (1878) | 43 5/16 (1100) | 62 15/16 (1600) | 46 3/4 (1187) | 13 5/16 (338) |
| OSA7263PRO-M3 | 73 15/16 (1878) | 43 5/16 (1100) | 78 3/4 (2000) | 61 13/16 (1570) | 13 15/16 (355) |
| OSA8763PRO-M3 | 88 1/2 (2248) | 43 7/8 (1114) | 78 1/2 (1994) | 61 5/8 (1565) | 11 7/8 (302) |


| Model | Net Weight lbs (kg) | Lifting with Eyelets lbs (kg) | Capacity with Casters lbs (kg) | Stationary* w/o Casters lbs (kg) |
|---------------|------------------------|-------------------------------------|--------------------------------------|--|
| OSA7247PRO-M3 | 345.4 (157) | 5500 (2500) | 4400 (2000) | 30800 (14000) |
| OSA7263PRO-M3 | 363 (165) | 5500 (2500) | 4400 (2000) | 30800 (14000) |
| OSA8763PRO-M3 | 437.8 (199) | 5500 (2500) | 4400 (2000) | 30800 (14000) |

* : Removing casters



AUSAVINA ONE STOP A-FRAME

- The heavy-duty A-frame is ideal for storing and transporting stone slabs, sheets and blocks with integrated forklift slots.
- Rubber strips protect slabs from cracking or chipping. Additional stability provided by ratchet securing bars.
- Its components are detachable to facilitate disassembling, storage, reassembling.

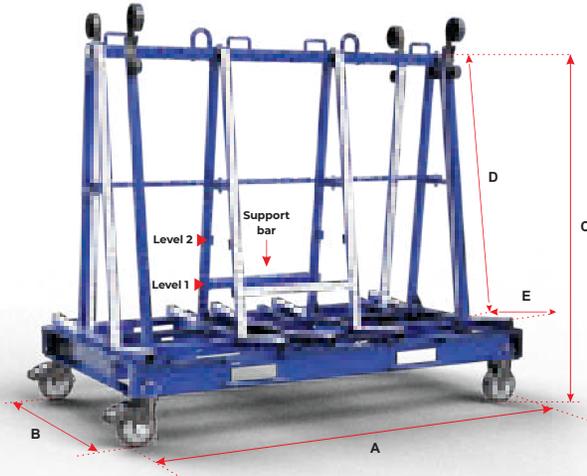

NEW IMPROVEMENT



NEW SOLUTION

New solution stores small slabs easily with support bar.



FLEXIBLE FOR VARIOUS SLAB SIZES

Support bars with two adjustable height levels help to store various slab sizes.

Note: Distribute Slabs/Glass Sheets Equally on Both Sides.

| Model | Length (A) In (mm) | Width (B) In (mm) | Height (C) In (mm) | (D) In (mm) | (E) In (mm) | Net Weight lbs (kg) | Lifting with Eyelets - lbs (kg) | W.L.L. with Casters - lbs (kg) | Stationary w/o Casters - lbs (kg) |
|------------|-----------------------|----------------------|-----------------------|--------------------|-------------------|------------------------|------------------------------------|-----------------------------------|--------------------------------------|
| OSA7247-M3 | 73 15/16 (1878) | 43 5/16 (1100) | 63 1/16 (1601) | 46 3/4 (1187) | 13 5/16 (338) | 303.6 (138) | 5500 (2500) | 4400 (2000) | 30800 (14000) |
| OSA7263-M3 | 73 15/16 (1878) | 43 5/16 (1100) | 78 3/4 (2000) | 61 13/16 (1570) | 13 15/16 (355) | 334.4 (152) | 5500 (2500) | 4400 (2000) | 30800 (14000) |
| OSA7275-M3 | 73 15/16 (1878) | 43 5/16 (1100) | 90 9/16 (2300) | 73 1/2 (1867) | 12 13/16 (326) | 341 (155) | 5500 (2500) | 4400 (2000) | 30800 (14000) |
| OSA7286-M3 | 73 15/16 (1878) | 43 5/16 (1100) | 103 7/16 (2628) | 86 7/16 (2195) | 11 3/4 (299) | 370.7 (168.5) | 5500 (2500) | 4400 (2000) | 30800 (14000) |
| OSA8763-M3 | 88 1/2 (2248) | 43 5/16 (1100) | 78 1/2 (1994) | 62 13/16 (1596) | 11 7/8 (302) | 369.6 (168) | 5500 (2500) | 4400 (2000) | 30800 (14000) |
| OSA9679-M3 | 96 7/8 (2460) | 47 1/4 (1200) | 94 5/16 (2396) | 77 5/8 (1972) | 13 1/2 (343) | 453.2 (206) | 5500 (2500) | 4400 (2000) | 30800 (14000) |


** : Work load limit

* : Removing casters

- The heavy-duty A-frame is ideal for storing and transporting stone slabs, sheets and blocks with integrated forklift slots.
- Rubber strips protect slabs from cracking or chipping. Additional stability provided by ratchet securing bars.
- Its components are detachable to facilitate disassembling, storage, reassembling.



Note: Distribute Slabs/Glass Sheets Equally on Both Sides.

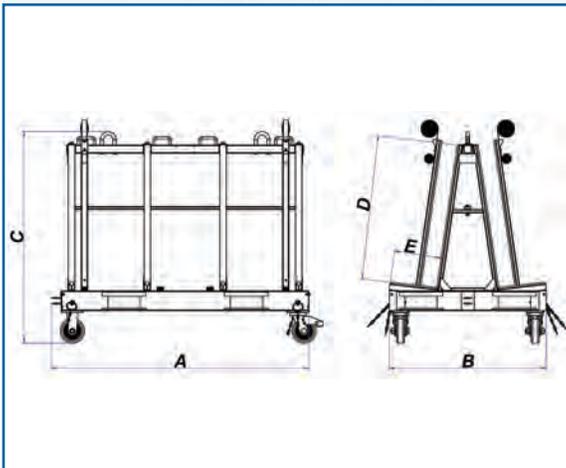

| Model | Length (A) In (mm) | Width (B) In (mm) | Height (C) In (mm) | (D) In (mm) | (E) In (mm) | Net Weight lbs (kg) | Lifting with Eyelets - lbs (kg) | W.L.L. with Casters - lbs (kg) | Stationary w/o Casters - lbs (kg) |
|----------------|-----------------------|----------------------|-----------------------|------------------|------------------|------------------------|------------------------------------|-----------------------------------|--------------------------------------|
| OSA4747 | 49 5/8 (1260) | 43 5/16 (1100) | 62 15/16 (1600) | 46 7/8 (1190) | 13 3/8 (333) | 253 (115) | 5500 (2500) | 4400 (2000) | 17600 (8000) |
| OSA6135 | 62 15/16 (1598) | 38 5/16 (973) | 51 1/2 (1296) | 35 1/2 (890) | 11 7/16 (290) | 261.8 (119) | 5500 (2500) | 4400 (2000) | 17600 (8000) |

****:** Work load limit *****: Removing casters



AUSAVINA BI-LEVEL A-FRAME

- This Bi-Level A-Frame is designed for large, heavy slab transportation and storage; several crossbars provide max stability. The superior design includes 2 levels, especially the upper level can be folded up when moving large slabs. Plenty of rubber strips and ratchet securing bars to keep slabs steady and safe. Suitable to work with fragile slabs. Features 4 casters for easy movement, including two with brakes to keep the frame securely in place when needed. All four casters are to removable to enhance versatility and boost productivity.


Technical Specification

Upper level loading capacity per side: 1760 lbs (800 kg)

Stationary without Casters: 30800 lbs (14000 kg)

Capacity with Casters: 4400 lbs (2000 kg)


The handle (sold separately) can be attached as your requirement

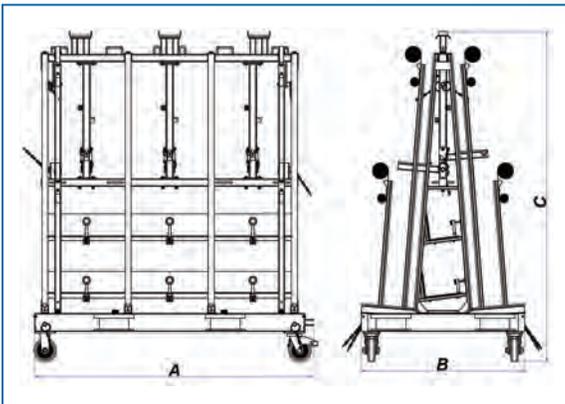

| Model | Length (A) In (mm) | Width (B) In (mm) | Height (C) In (mm) | Net Weight lbs (kg) |
|---------------|-----------------------|----------------------|-----------------------|------------------------|
| OSA7267-2T-M2 | 73 15/16 (1878) | 43 5/16 (1100) | 85 7/8 (2182) | 495 (225) |

AUSAVINA ONE STOP A-FRAME

- A very safe One Stop A-Frame to move slabs, it has plenty of rubber strips and ratchet securing bars to hold loads steady. Has 4 casters for easy movement, two maneuvered by the pulling handle. Two eyelets on the top bar and wide slots in the base fit perfectly for lifting the frame with an overhead crane or forklift truck. Fully dismountable for easy transport or storage. Reasonably arranged A-frames provide high rigidity and maximum efficiency when handling large materials.

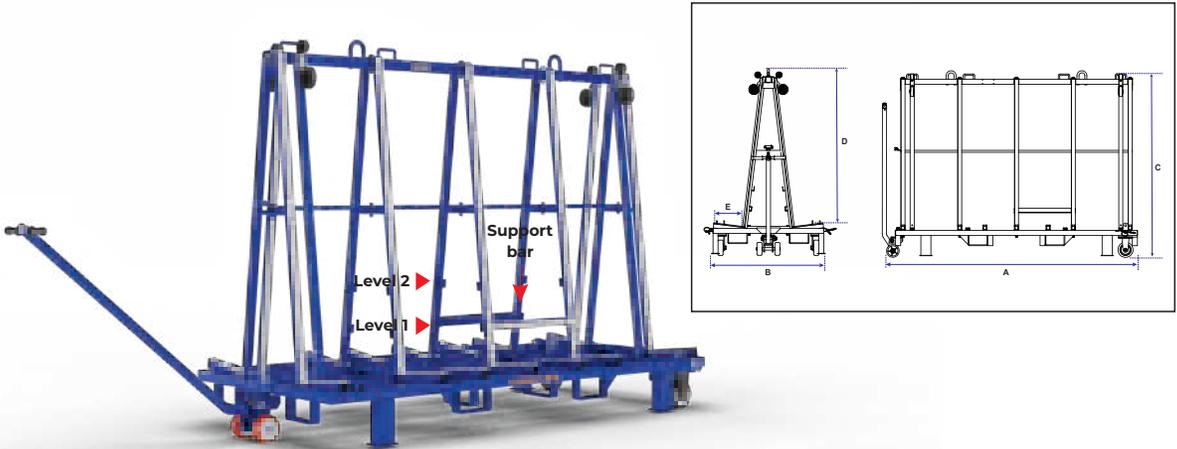

NEW IMPROVEMENT




NEW SOLUTION

New solution stores small slabs easily with support bar.



FLEXIBLE FOR VARIOUS SLAB SIZES

Support bars with two adjustable height levels help to store various slab sizes.

Note: Distribute Slabs/Glass Sheets Equally on Both Sides.


| Model | Length (A) In (mm) | Width (B) In (mm) | Height (C) In (mm) | (D) In (mm) | (E) In (mm) | Net Weight lbs (kg) |
|------------|-----------------------|----------------------|-----------------------|----------------|----------------|------------------------|
| OSA9458-M3 | 94 1/2 (2400) | 43 5/16 (1100) | 72 1/16 (1830) | 58 7/16 (1484) | 12 1/8 (308) | 424.6 (193) |

| Minimum Slab Size In (mm) | Maximum Slab Size In (mm) | Lifting with Eyelets - lbs (kg) | Capacity with Casters - lbs (kg) | Stationary w/o Casters - lbs (kg) |
|---------------------------------|-----------------------------------|------------------------------------|-------------------------------------|--------------------------------------|
| 7 7/8 x 11 13/16 (200 x 300) | 70 7/8 x 118 1/8 (1800 x 3000) | 5500 (2500) | 4400 (2000) | 8800 (4000) |



AUSAVINA ONE STOP A-FRAME

- An ideal A-Frame for stone and glass slab transportation in any workplace. Plenty of rubber strips and ratchet securing bars to keep slabs steady and safe. Usable space inside standing parts of the frame to store tools and accessories. Has 4 casters for easy movement, two with brake to lock the frame steady to the ground when needed. Four removable casters to maximize flexibility and increase productivity. A-Frame has base slots and upper bar eyelets to lift it with a fork lift truck or an overhead crane.

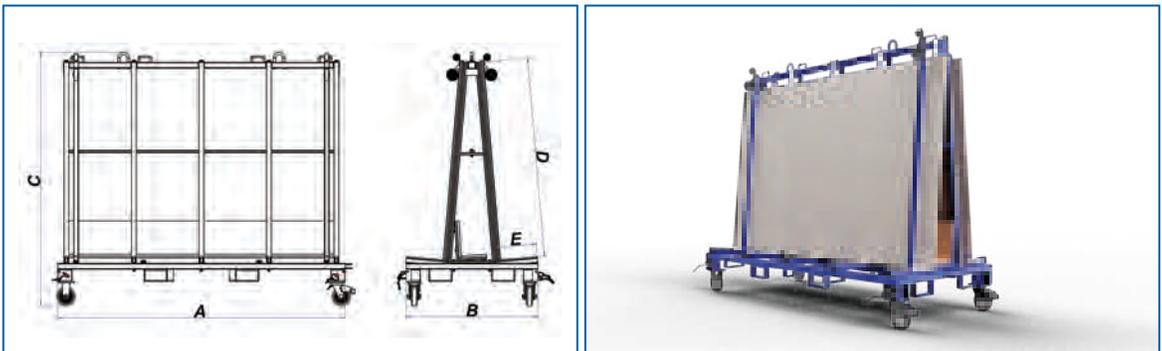

Note: Distribute Slabs/Glass Sheets Equally on Both Sides.

| Model | Length (A) In (mm) | Width (B) In (mm) | Height (C) In (mm) | (D) In (mm) | (E) In (mm) |
|------------|-----------------------|----------------------|-----------------------|----------------|----------------|
| OSA9463-M2 | 96 7/8 (2460) | 43 5/16 (1100) | 82 5/16 (2090) | 64 5/16 (1634) | 13 5/16 (338) |


| Model | Net Weight lbs (kg) | Lifting with Eyelets - lbs (kg) | Capacity with Casters - lbs (kg) | Stationary * W/o Casters - lbs (kg) |
|------------|------------------------|------------------------------------|-------------------------------------|--|
| OSA9463-M2 | 473 (215) | 5500 (2500) | 4400 (2000) | 30800 (14000) |

*: Removing casters

AUSAVINA MULTI ADJUSTABLE DROPSIDE TRUCK A-FRAME


- Designed to combine with the truck in maneuvering the glass sheets and large packed glass door.

AMDST9076

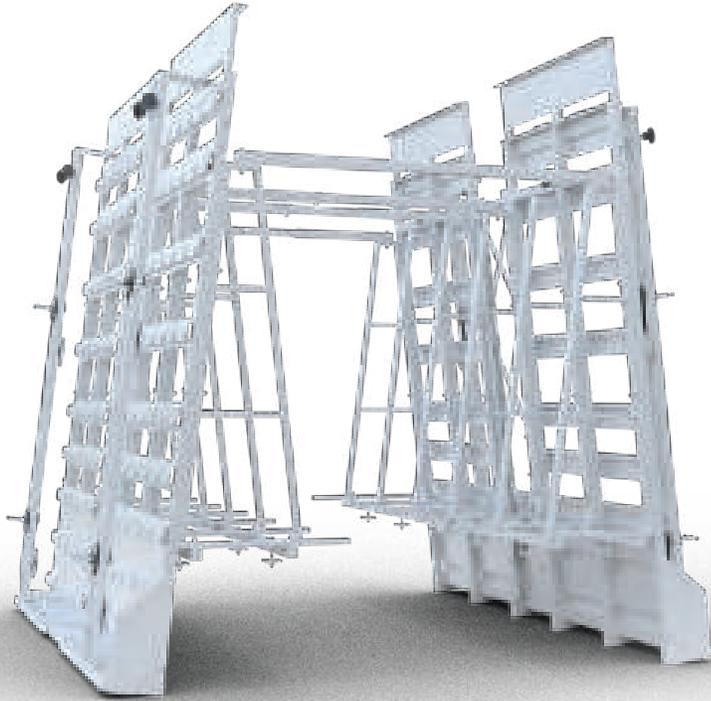

CONVENIENT

Easily combined with different types of trucks for saving time to transport many large sizes of material slabs.

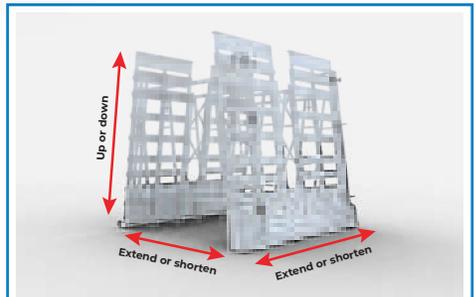

FLEXIBLE

Flexibly adjust the frame to fit with the truck or material slab sizes.

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Work Load Limit Per Side - lbs (kg) | Net Weight lbs (kg) |
|------------------|--|--|--|--|------------------------|
| AMDST9076 | 80 ⁵ / ₁₆ - 90 ⁵ / ₁₆ (2040-2300) | 79 ¹ / ₂ - 94 ¹ / ₂ (2020 - 2400) | 90 ⁹ / ₁₆ - 100 ³ / ₈ (2300 - 2550) | 1540 (700) | 1034 (470) |


AUSAVINA HEAVY DUTY DISPLAY STAND RACK

- Unique design for storing and displaying stone slabs in the warehouse or exhibition.
- A high work load limit helps to increase productivity.
- Suitable for a variety of materials of different sizes.



* Minimum slab size placed on the display frame:
70 7/8" x 70 7/8" x 3/4" (1800 x 1800 x 6 mm)

* Maximum slab size placed on the display frame:
98 7/16" x 137 13/16" x 1 1/16" (2500 x 3500 x 40 mm)

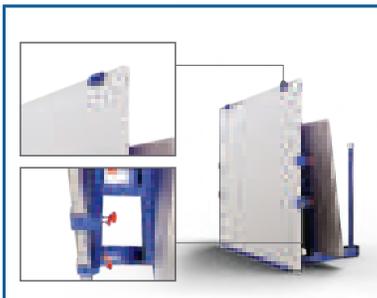

CONVENIENCE

Hook bar can be adjusted to fix slabs firmly and safely.



SAFE

The A-Frame design helps slabs lean against the frame firmly.



EFFECTIVE

The frame is made of steel for rigidity, high stability and large load capacity.

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Capacity of A-frame lbs (kg) | Capacity of Display Frame lbs (kg) |
|----------|----------------|---------------|----------------|---------------------|------------------------------|------------------------------------|
| AHDSR078 | 98 7/16 (2500) | 49 7/8 (1267) | 90 3/16 (2300) | 374 (170) | 17600 (8000) | 2300 (1050) |

AUSAVINA TRIPLE SIDE FOLDING TRUCK A-FRAME

- Designed to store slabs within warehouses, factories and display areas.
- The frame is made of steel to ensure high rigidity and high load capacity in operation process.



* Minimum slab size:
7 7/8" x 15 3/4" (200 x 400 mm)


* Maximum slab size:
66 15/16" x 102 3/8" (1700 x 2600 mm)



Safety bars
keep slabs
stable

HIGH WORK LOAD LIMIT

A unique design with high hardness steel and three storage positions for work load limit up to 22000 lbs (10000 kg).

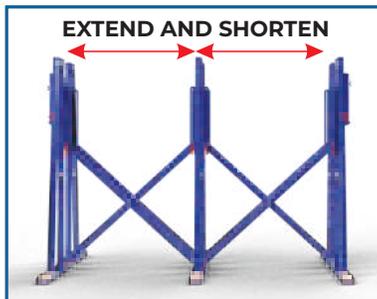

EXTEND AND SHORTEN

CONVENIENCE

Easy to extend and shorten for fitting many slab sizes from 14 15/16" - 79 1/2" (380 mm - 2020 mm).



SAFE

Timber blocks on the base frame protect stone slabs from chipping and scratching.

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Work Load Limit Mid Frame - lbs (kg) | Work Load Limit Per Side - lbs (kg) | Work Load Limit lbs (kg) |
|-----------|-----------------------------------|------------------|------------------|---------------------|--------------------------------------|-------------------------------------|--------------------------|
| ATSFTA056 | 14 15/16 ~ 79 1/2 (380 ~ 2020) | 58 3/4 (1480) | 57 5/8 (1463) | 202.4 (92) | 5500 (2500) | 11000 (5000) | 22000 (10000) |

AUSAVINA FOLDING ADJUSTABLE GIANT A-FRAME

- FAGA078 is a solid design to store many stone slab sizes in warehouses, factories or exhibitions.
- Sturdy A-shape increases the efficiency and reliability of storing slabs.
- Simple structure to easily assemble and disassemble for packing and transporting.



* Minimum slab size:
23 5/8" x 66 15/16" (600 x 1700 mm)

* Maximum slab size:
88 9/16" x 141 3/4" (2250 x 3600 mm)

Shorten

Extend

2 crossbars to firmly stand

The bracket helps to fix the frame to the floor firmly

Timber blocks prevent slabs from scratches and allow them to lean back to A-frame securely

EFFECTIVE

Adjustable length crossbars for flexibly storing multiple sizes of slabs.

Space-saving

Fold upward

Fold upward

CONVENIENCE


The base frame can be tidily folded upward for convenient storage and transportation.

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Work Load Limit Per Side - lbs (kg) | Work Load Limit Both Side - lbs (kg) |
|----------------|-------------------------------------|-------------------|------------------|---------------------|-------------------------------------|--------------------------------------|
| FAGA078 | 66 15/16 ~ 118 1/8 (1700 ~ 3000) | 89 7/16 (2272) | 78 1/8 (1985) | 226.6 (103) | 17500 (7950) | 35000 (15900) |

AUSAVINA SINGLE SIDED A-FRAME

- An effective tool to store and keep slabs safe. It has a compact design to suit every confined space. The timber block on base protects the stone slabs from chipping and scratching. Made of steel for high rigidity and high load capacity. A pair of frames has a load capacity of up to 16500 lbs (7500 kg).

SSAF060

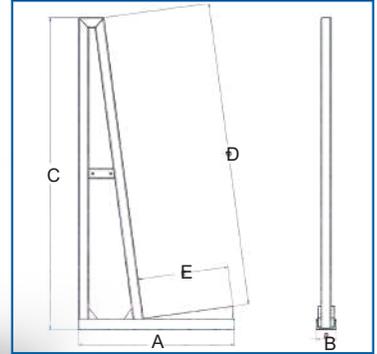


W.L.L.: Work Load Limit

| Model | Length (A) In (mm) | Width (B) In (mm) | Height (C) In (mm) | (D) In (mm) | (E) In (mm) | Net Weight Per Pair - lbs (kg) | W.L.L. Per Pair lbs (kg) |
|---------|-----------------------|----------------------|-----------------------|----------------|----------------|-----------------------------------|-----------------------------|
| SSAF060 | 30 ½ (775) | 3 ⅝ (100) | 60 (1524) | 58 ⅞ (1484) | 17 ¾ (451) | 88 (40) | 16500 (7500) |

AUSAVINA SINGLE SIDED TRUCK A-FRAME

- Single Sided Truck A-Frame is designed for safe slab storage. The base has timber blocks as protection. Made of steel for high rigidity and load capacity. It can keep slabs in place in bundles of up to 16500 lbs (7500 kg). Its compact design fits confined spaces, helping to save valuable workspace.

SSTAF060

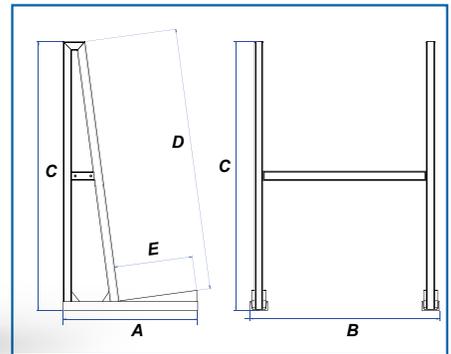

| Model | Length (A) In (mm) | Width (B) In (mm) | Height (C) In (mm) | (D) In (mm) | (E) In (mm) | Net Weight Per Pair - lbs (kg) | W.L.L. Per Pair lbs (kg) |
|----------|-----------------------|----------------------|-----------------------|----------------|----------------|-----------------------------------|-----------------------------|
| SSTAF060 | 30 ½ (775) | 65 ⅞ (1662) | 59 ⅜ (1502) | 57 ⅝ (1464) | 17 ⅜ (453) | 93.5 (42.5) | 16500 (7500) |

W.L.L.: Work Load Limit

AUSAVINA STANDARD A-FRAME

- Standard A-Frames, sold in pairs, are designed for safe slab storage. A solid structure and maximum stability. An ideal choice if compared to other A-Frames usually available in the market.

SOLD IN PAIRS





NOTE Distribute Slabs Equally on Both Sides

| Model | Length (A) In (mm) | Width (B) In (mm) | Height (C) In (mm) | (D) In (mm) | (E) In (mm) | Net Weight Per Pair - lbs (kg) | Work Load Limit lbs (kg) |
|---------|--|--|--|---|---|-----------------------------------|---|
| SAF060 | 58 ¹⁵ / ₁₆ (1497) | 3 ¹⁵ / ₁₆ (100) | 58 ¹³ / ₁₆ (1490) | 57 ¹ / ₈ (1451) | 17 ⁷ / ₈ (454) | 115.5 (52.5) | 16500 (7500) Per Side 33000 (15000) Both Sides |
| ESAF060 | 58 ¹⁵ / ₁₆ (1497) | 3 ¹ / ₈ (80) | 58 ¹³ / ₁₆ (1490) | 57 ⁵ / ₁₆ (1456) | 17 ¹³ / ₁₆ (450) | 85.8 (39) | 13200 (6000) Per Side 26400 (12000) Both Sides |

AUSAVINA TRUCK A-FRAME

- Truck A-Frame is designed for safe slab storage with optimization of cost and productivity. Two A-Frames are connected with a crossbar for a sturdier structure. This crossbar can be disassembled for easy transport and storage. The timber block on the base frame protects slabs from damage.

TAF060

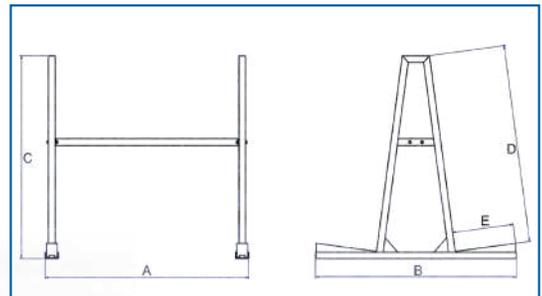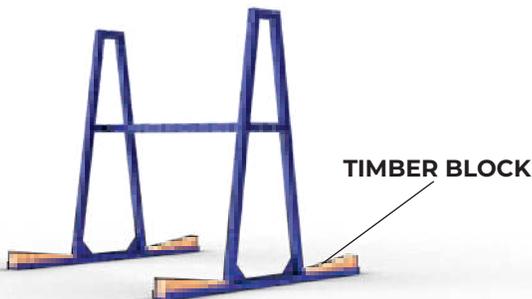



NOTE Distribute Slabs Equally on Both Sides

| Model | Length (A) In (mm) | Width (B) In (mm) | Height (C) In (mm) | (D) In (mm) | (E) In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|--------|--|--|--|--|---|------------------------|---|
| TAF060 | 59 ¹³ / ₁₆ (1520) | 58 ¹⁵ / ₁₆ (1497) | 58 ¹³ / ₁₆ (1490) | 57 ¹ / ₈ (1451) | 17 ¹³ / ₁₆ (455) | 125.4 (57) | 16500 (7500) Per Side 33000 (15000) Both Sides |

AUSAVINA HEAVY DUTY TRUCK A-FRAME

- Two A-Frames of TAF060H are connected by 4 crossbars giving max sturdiness to the whole structure. Timber blocks on the base help to minimize impact and protect slabs from scratches or cracks. The load capacity is up to 39600 lbs (18000) kg).

TAF060H

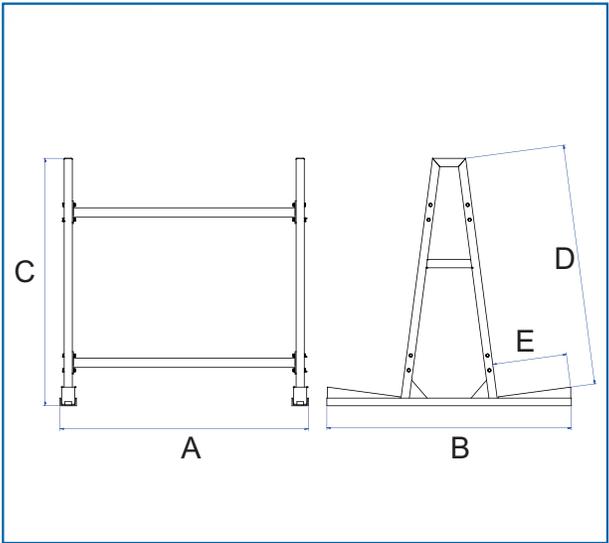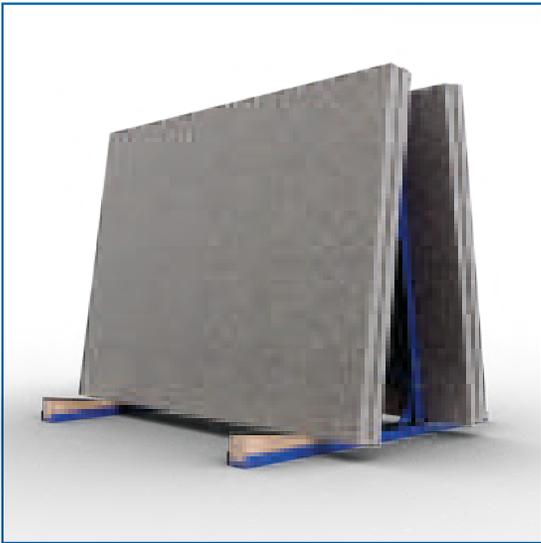

NOTE Distribute Slabs Equally on Both Sides

| Model | Length (A) In (mm) | Width (B) In (mm) | Height (C) In (mm) | (D) In (mm) | (E) In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|---------|--|--|--|--|---|------------------------|---|
| TAF060H | 59 ¹³ / ₁₆ (1520) | 58 ¹⁵ / ₁₆ (1497) | 58 ¹³ / ₁₆ (1490) | 57 ³ / ₈ (1451) | 17 ¹⁵ / ₁₆ (455) | 162.8 (74) | 19800 (9000) Per Side 39600 (18000) Both Sides |


AUSAVINA QLI TRUCK A-FRAME 060

- Qli Truck A-frame 060 is ideal for storing and keeping stone slabs tidy and organized in warehouses, factories or workshops. The base has timber blocks as protection, the standing frame and the crossbar form a sturdy frame. Made of steel for sturdiness and durability.

AUSAVINA QLI TRUCK A-FRAME 060



AUSAVINA QLI TRUCK A-FRAME SENI 060

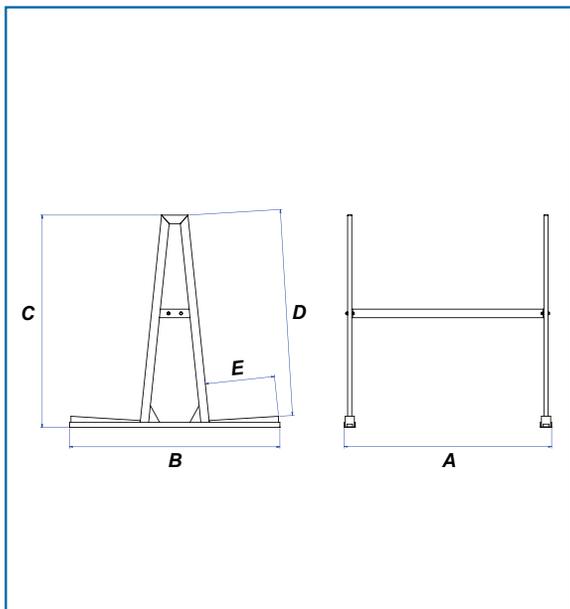


| Model | Length (A) In (mm) | Width (B) In (mm) | Height (C) In (mm) | (D) In (mm) | (E) In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|----------|-----------------------|----------------------|-----------------------|----------------|----------------|------------------------|---|
| AQTA060 | 58 ¼ (1480) | 59 ⅓ (1500) | 58 ⅓ (1490) | 57 ½ (1448) | 19 ½ (495) | 80.3 (36.5) | 17600 (8000) Per Side 35200 (16000) Both Sides |
| AQTAS060 | 59 ⅓ (1500) | 59 ⅓ (1500) | 58 ⅓ (1490) | 57 ½ (1450) | 19 ⅝ (499) | 79.2 (36) | 15400 (7000) Per Side 30800 (14000) Both Sides |

AUSAVINA QLI STANDARD A-FRAME 060

- These sturdy and durable frames are designed for safe slab storage in any work place.
- The base has timber blocks to avoid contact damage.



SOLD IN PAIRS

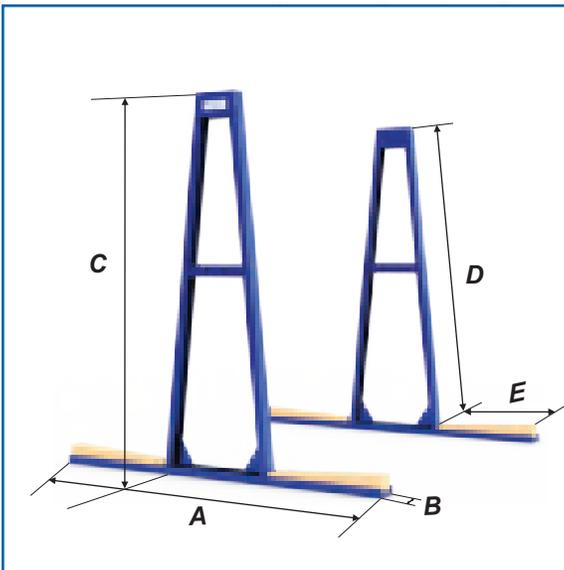

| Model | Length (A) In (mm) | Width (B) In (mm) | Height (C) In (mm) | (D) In (mm) | (E) In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|----------------|-----------------------|----------------------|-----------------------|-------------------|-----------------|------------------------|---|
| AQSA060 | 59 1/16 (1500) | 3 3/8 (80) | 58 1 1/16 (1490) | 57 1/16 (1450) | 19 5/8 (499) | 72.6 (33) | 15400 (7000) Per Side 30800 (14000) Both Sides |

AUSAVINA QLI TRUCK A-FRAME 074

- Qli Truck A-Frame 074 is ideal for storing and keeping stone slabs tidy and organized in warehouses, factories or workshops. The base includes timber blocks for protection, while the standing frame and combine to create a sturdy structure. Made of steel for sturdiness and durability.


AUSAVINA QLI TRUCK A-FRAME 074

AQTA074



AUSAVINA QLI TRUCK A-FRAME SENI 074

AQTAS074

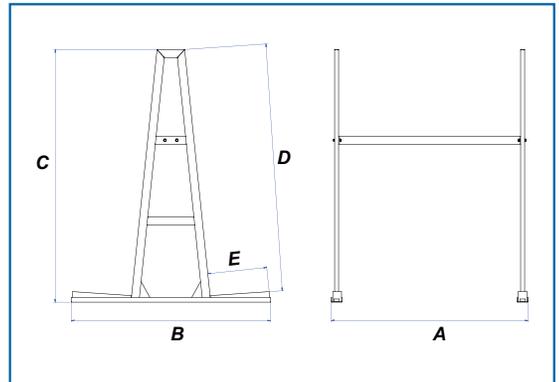

| Model | Length (A) In (mm) | Width (B) In (mm) | Height (C) In (mm) | (D) In (mm) | (E) In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|----------|-----------------------|----------------------|-----------------------|----------------|----------------|------------------------|---|
| AQTA074 | 58 ¼ (1480) | 59 ⅜ (1500) | 73 ⅜ (1872) | 72 ⅝ (1832) | 17 ⅞ (446) | 96.8 (44) | 17600 (8000) Per Side 35200 (16000) Both Sides |
| AQTAS074 | 59 ⅜ (1500) | 59 ⅜ (1500) | 73 ⅜ (1872) | 72 ¾ (1833) | 17 ⅞ (446) | 96.8 (44) | 15400 (7000) Per Side 30800 (14000) Both Sides |

AUSAVINA QLI FOLDING TRUCK A-FRAME 060

- The Ausavina Qli Folding Truck A-Frame 060 is designed for safe slab storage. The base has timber blocks as protection, the standing frame and the crossbar form a sturdy frame.

- Made of steel for sturdiness and durability.

Features: Foldable base to save storage space.


AUSAVINA QLI FOLDING TRUCK A-FRAME 060

AQFTA060



AUSAVINA QLI FOLDING TRUCK A-FRAME JUNI/SENI 060

AQFTAJ060/AQFTAS060

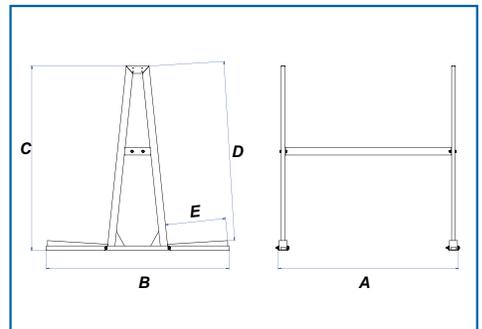

| Model | Length (A) In (mm) | Width (B) In (mm) | Height (C) In (mm) | (D) In (mm) | (E) In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|-----------|-----------------------|----------------------|-----------------------|-------------------|-----------------|------------------------|---|
| AQFTA060 | 59 1/16 (1500) | 59 1/16 (1500) | 58 11/16 (1490) | 57 1/16 (1448) | 19 1/2 (495) | 80.3 (36.5) | 17600 (8000) Per Side 35200 (16000) Both Sides |
| AQFTAS060 | 59 1/16 (1500) | 59 1/16 (1500) | 58 11/16 (1490) | 57 1/16 (1450) | 19 5/8 (498) | 83.6 (38) | 15400 (7000) Per Side 30800 (14000) Both Sides |
| AQFTAJ060 | 59 1/16 (1500) | 59 1/16 (1500) | 58 11/16 (1490) | 57 1/16 (1448) | 19 5/8 (498) | 64.9 (29.5) | 12400 (5636) Per Side 24800 (11272) Both Sides |

AUSAVINA QLI FOLDING TRUCK A-FRAME 074

- Ausavina Qli Folding Truck A-Frame 074 is ideal for storing and keeping stone slabs tidy and organized in warehouses, factories or workshops. The base has timber blocks as protection, the standing frame and the crossbar form a sturdy frame. Made of steel for sturdiness and durability.

Features: Foldable base to save storage space.


AUSAVINA QLI FOLDING TRUCK A-FRAME 074

AQFTA074



AUSAVINA QLI FOLDING TRUCK A-FRAME SENI/JUNI 074

AQFTAS074/AQFTAJ074


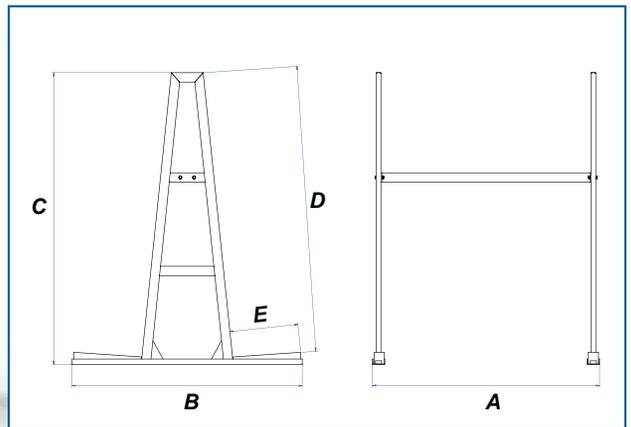


| Model | Length (A) In (mm) | Width (B) In (mm) | Height (C) In (mm) | (D) In (mm) | (E) In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|-----------|-----------------------|----------------------|-----------------------|----------------|----------------|------------------------|---|
| AQFTA074 | 58 ¾ (1480) | 59 ⅜ (1500) | 73 ⅜ (1872) | 72 ⅜ (1832) | 17 ⅞ (446) | 93.5 (42.5) | 17600 (8000) Per Side 35200 (16000) Both Sides |
| AQFTAS074 | 59 ⅜ (1500) | 59 ⅜ (1500) | 73 ⅜ (1872) | 72 ⅜ (1833) | 17 ⅞ (446) | 97.9 (44.5) | 15400 (7000) Per Side 30800 (14000) Both Sides |
| AQFTAJ074 | 59 ⅜ (1500) | 59 ⅜ (1500) | 73 ⅜ (1872) | 72 ⅜ (1833) | 17 ⅞ (446) | 78.1 (35.5) | 12400 (5636) Per Side 24800 (11272) Both Sides |

AUSAVINA EASY LOAD A-FRAME

- AEL060 is designed for safe slab storage in any workplace.
- Timber blocks on the base help to minimize impact and protect slabs from scratches or cracks.
- A safer and more economical alternative than wood A-Frames.

AEL060

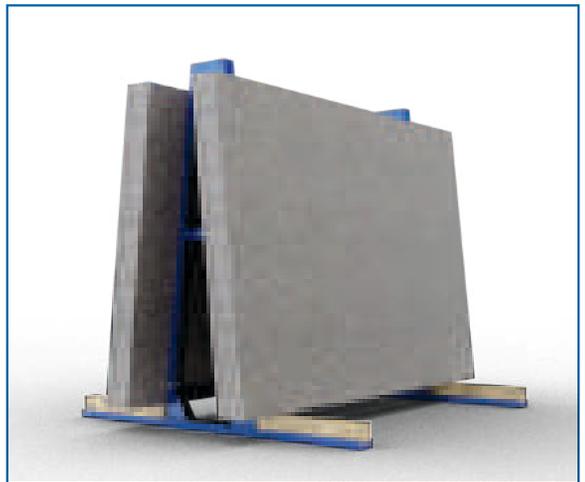
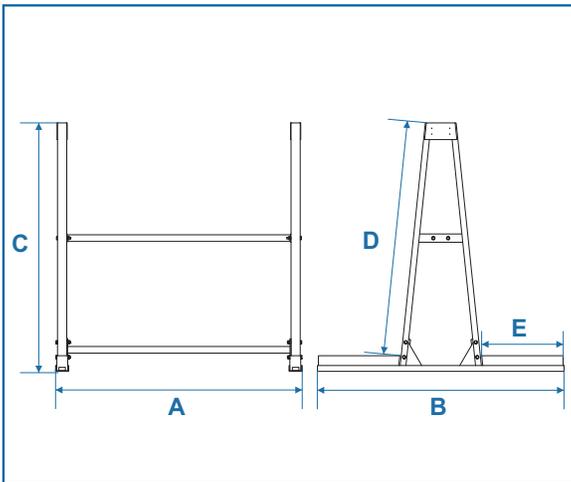


| Model | Length (A) In (mm) | Width (B) In (mm) | Height (C) In (mm) | (D) In (mm) | (E) In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|--------|-----------------------|----------------------|-----------------------|------------------|-----------------|------------------------|---|
| AEL060 | 59 1/16 (1500) | 59 1/16 (1500) | 58 13/16 (1490) | 55 3/8 (1406) | 19 1/2 (495) | 114.4 (52) | 6000 (2727) Per Side 12000 (5454) Both Sides |

AUSAVINA ADJUSTABLE GIANT TRUCK A-FRAME

- Designed to store heavy-duty stone slabs in warehouses, factories and display areas.
- The frame is made of steel to ensure a high load capacity and rigidity during operation.

AGTA096/AFGTA096

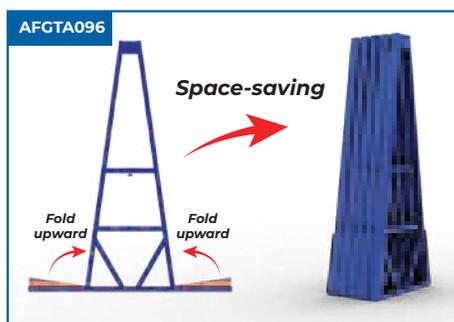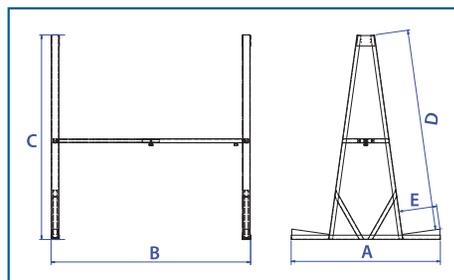

* Minimum slab size:
55 1/8" x 7 7/8" x 3/8" (1400 x 200 x 10 mm)

* Maximum slab size:
118 1/8" x 106 5/16" x 3 15/16" (3000 x 2700 x 100 mm)

EFFECTIVE

A-shape provides efficient and reliable functions to allow stone slabs to lean back.

EXTEND AND SHORTEN

FLEXIBLE

It is easy to extend or shorten the distance of two A-Frames to suit different slab sizes.

SAFE

Timber blocks on the base frame protect stone slabs from chipping and scratching while storing.

| Model | Length (A) In (mm) | Width (B) In (mm) | Height (C) In (mm) | (D) In (mm) | (E) In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|----------|-----------------------|------------------------------------|-----------------------|------------------|------------------|------------------------|---|
| AGTA096 | 70 7/8 (1800) | 54 1/2 - 94 13/16 (1384 - 2408) | 96 (2437) | 94 1/2 (2400) | 18 1/16 (458) | 246.4 (112) | 17600 (8000) Per Side 35200 (16000) Both sides |
| AFGTA096 | 78 3/4 (2000) | 54 1/2 - 94 13/16 (1384 - 2408) | 96 (2437) | 94 1/2 (2400) | 21 7/8 (556) | 275 (125) | 17600 (8000) Per Side 35200 (16000) Both sides |

AUSAVINA HEAVY DUTY SINGLE SIDE A-FRAME


- Designed to organize large stone slabs in warehouses, factories and construction sites.
- Made of high-quality steel to ensure safe and efficient storage of heavy stone slabs.

AHSSA100



EFFICIENT STORAGE

A-Frame design features a reliable angle, ensuring stone slabs are placed safely and securely on the frame.

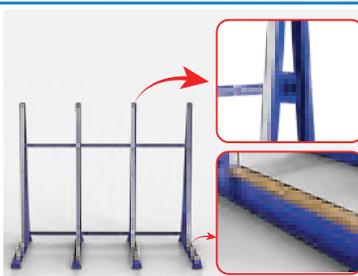

MAXIMUM PROTECTION

Timber blocks on the base and rubber strips on the A-Frame protect slabs against sliding or getting damaged.



HIGH LOAD CAPACITY


Rigid structure with a high work load limit of up to 10000kg, making it suitable for storing large-sized material slabs.

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|----------|-------------------|------------------|-------------------|------------------------|-----------------------------|
| AHSSA100 | 121 1/16 (3075) | 59 1/16 (1500) | 100 (2540) | 574.2 (261) | 22000 (10000) |

AUSAVINA HEAVY DUTY DOUBLE SIDE A-FRAME

- Designed to organize large stone slabs in warehouses, factories, exhibitions, etc.
- The frame is made of robust steel, ensuring it can safely handle large and heavy slabs.

AHDSA100

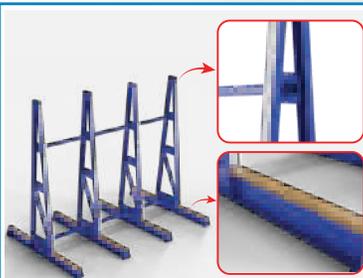

OPTIMAL SAFETY

Timber blocks on the base and rubber strips along the A-Frame protect slabs from sliding or getting damaged.



FLEXIBLE STORAGE

It supports robust weight, making it ideal for storing stone, glass or other large materials.



SPACE-SAVING SOLUTION

A sturdy structure optimizes space, providing secure storage on both sides for saving working areas.

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|----------|-----------------|---------------|----------------|---------------------|--|
| AHDSA100 | 121 1/16 (3075) | 78 3/4 (2000) | 100 (2540) | 651.2 (296) | 22000 (10000) Per Side 44000 (20000) Both Sides |

AUSAVINA UNIVERSAL A-FRAME

- Efficiently store slabs of various sizes to maximize warehouse space.



Detachable components are easy to assemble



Grab the stone that are within easy reach



Made from durable steel to withstand heavy loads

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Work Load Limit Per Set of Securing Bars - lbs (kg) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|------------|---|---------------------------------------|---|---|---------------------|--------------------------|
| UAF10-1.5T | 94 ¹³ / ₁₆ (2408) | 69 ¹ / ₈ (1756) | 67 ¹⁵ / ₁₆ (1725) | 3300 (1500) | 261.8 (119) | 22000 (10000) |
| UAF15-2.5T | 94 ¹³ / ₁₆ (2408) | 69 ¹ / ₈ (1756) | 68 ¹³ / ₁₆ (1745) | 5500 (2500) | 299.2 (136) | 33000 (15000) |
| UAF15-5T | 94 ¹³ / ₁₆ (2408) | 71 ¹ / ₈ (1806) | 70 ¹ / ₄ (1785) | 11000 (5000) | 411.4 (187) | 33000 (15000) |
| UAF15-10T | 94 ¹³ / ₁₆ (2408) | 71 ¹ / ₈ (1806) | 70 ¹ / ₄ (1785) | 22000 (10000) | 446.6 (203) | 33000 (15000) |

AUSAVINA HEAVY-DUTY MULTI-MATERIAL BUNDLE RACK

- Integrated function of Single Side A-Frame, Double Side A-Frame and Bundle Slab Rack.
- Easy to adjust multiple working layouts to suit various requirements.



AHMCCR8970

AHMCCR8970-M2



Transport by Container


| | | | | | |
|--|--|---|--|--|----------------------------------|
|  | A COMBINATION OF POLES AND SINGLE SIDE A-FRAME |  | A COMBINATION OF POLES AND DOUBLE SIDE A-FRAME |  | AS A SLAB BUNDLE RACK WITH POLES |
| Safely transport slab bundles in containers as a slab bundle rack or as a combination of poles and single sided or double sided A-Frame. | | | | | |

Storage & Display in Warehouse

| | | | | | |
|---|--|---|--|--|-----------------------------|
|  | STORAGE WITH SINGLE SIDE A-FRAME & POLES |  | STORAGE WITH DOUBLE SIDE A-FRAME & POLES |  | STORAGE AS BUNDLE SLAB RACK |
| In warehouses, it can be structured as a slab bundle rack or as a combination of poles and double-sided or single-sided A-Frames for displaying and storing slab bundles. | | | | | |

Transport by Truck

Optimize Storage Space
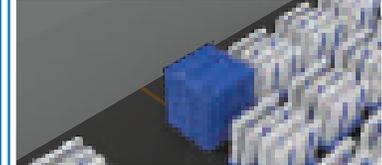
| | | | | | |
|--|---|---|--|--|--|
|  | Moreover, the product can store slabs as an A-Frame design while moving on the truck. |  | Stackable poles & A-Frame for effective storage and minimizing transportation costs. |  | Stackable to optimize storage space when not in use. |
|--|---|---|--|--|--|

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) | Capacity Between 2 Poles - lbs (kg) |
|----------------------|----------------|----------------|----------------|---------------------|--------------------------|-------------------------------------|
| AHMCCR8970 | 89 3/8 (2270) | 89 3/8 (2270) | 78 1/4 (1987) | 1216 (553) | 44000 (20000) | 12500 (5680) |
| AHMCCR8970-M2 | 89 3/8 (2270) | 43 5/16 (1100) | 63 1/16 (1601) | 860.2 (391) | 22000 (10000) | 12500 (5680) |

AUSAVINA BUNDLE SLAB RACK

- Durable rack for storing bundled stone, marble and granite slabs.
- Features 6mm-thick poles with protective wooden strips.
- The flexible design includes 4 poles and multiple mounting positions on each base. The upgraded BSR010-AC1 offers up to 26 positioning holes-perfect for securing slabs of varying sizes.



SOLD IN PAIRS

1* Maximum Weight Load Limit Between Poles

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight Per Pair lbs (kg) | Work Load Limit - lbs (kg) | Poles Number Per Base | Holes Number Per Base |
|-------------------|----------------|---------------|----------------|------------------------------|----------------------------|-----------------------|-----------------------|
| BSR010 | 118 ¾ (3015.5) | 6 7/16 (164) | 59 ¾ (1508) | 510.4 (232) | 22000 (10000) | 4 | 7 |
| BSR010-AC1 | 118 ¾ (3015.5) | 6 7/16 (164) | 59 ¾ (1508) | 585.2 (266) | 22000 (10000) | 4 | 26 |

AUSAVINA SLAB RACK



1* Maximum Weight Load Limit Between Poles


| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight Per Pair lbs (kg) | Work Load Limit - lbs (kg) | Poles Number Per Base | Holes Number Per Base |
|---------------|----------------|---------------|----------------|------------------------------|----------------------------|-----------------------|-----------------------|
| SRK010 | 118 ¾ (3016) | 6 7/16 (164) | 58 7/8 (1496) | 616 (280) | 6000 (2727) | 10 | 11 |

AUSAVINA QLI UNIVERSAL BUNDLE SLAB RACK

- Designed to store and display stone slabs or bundle slabs within warehouses, factories and construction sites.
- The product is made of steel, so it is stable and sturdy. It consists mainly of a base frame and poles.
- Design holes continuously on the base frame.



SOLD IN PAIRS

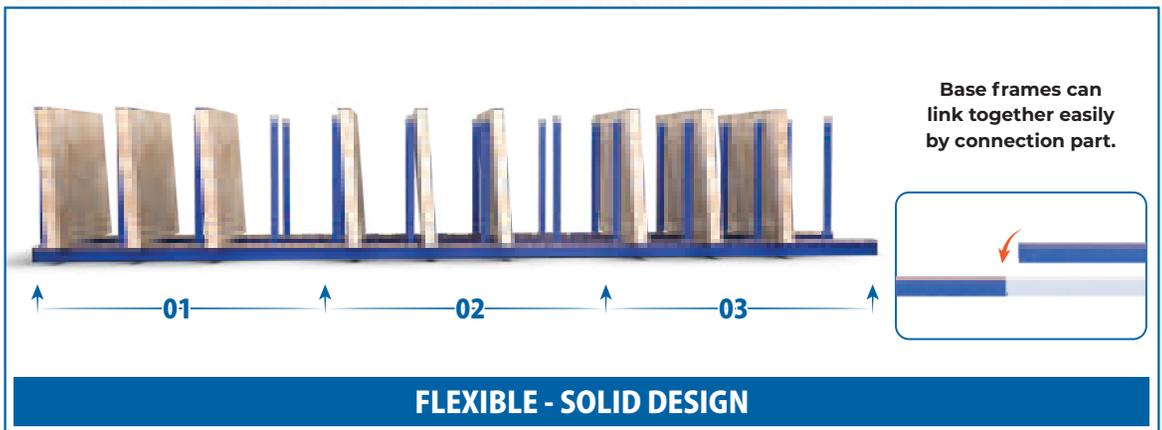

FLEXIBLE - SOLID DESIGN

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight Per Pair lbs (kg) | Work Load Limit - lbs (kg) | Poles Number Per Base | Holes Number Per Base |
|---------------|----------------|---------------|----------------|------------------------------|----------------------------|-----------------------|-----------------------|
| AQUBSR010-PRO | 118 ¾ (3016) | 6 ¼ (158) | 59 ⅜ (1508) | 407 (185) | 12500 (5680) | 4 | 33 |

*** Maximum Weight Load Limit Between Poles**

AUSAVINA RHINO SLAB RACK

- Rhino Slab Racks are the ideal tool for storing and display multiple slabs of different sizes and thicknesses in various workplaces.
- All Rhino Slab Racks have rubber strips on the bases.



SOLD IN PAIRS



| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight Per Pair lbs (kg) | Work Load Limit - lbs (kg) | Poles Number Per Base | Holes Number Per Base |
|--------|----------------|---------------|----------------|------------------------------|----------------------------|-----------------------|-----------------------|
| RSR010 | 119 1/8 (3026) | 7 9/16 (192) | 59 3/16 (1504) | 600.6 (273) | 6000 (2727) | 10 | 28 |


1* Maximum Weight Load Limit Between Poles

AUSAVINA QLI UNIVERSAL SLAB RACK

- Designed to store and display stone slabs or bundle slabs within warehouses, factories and construction sites.
- The product is made of steel, so it is stable and sturdy. It consists mainly of a base frame and poles.
- Design holes continuously on the base frame.



SOLD IN PAIRS

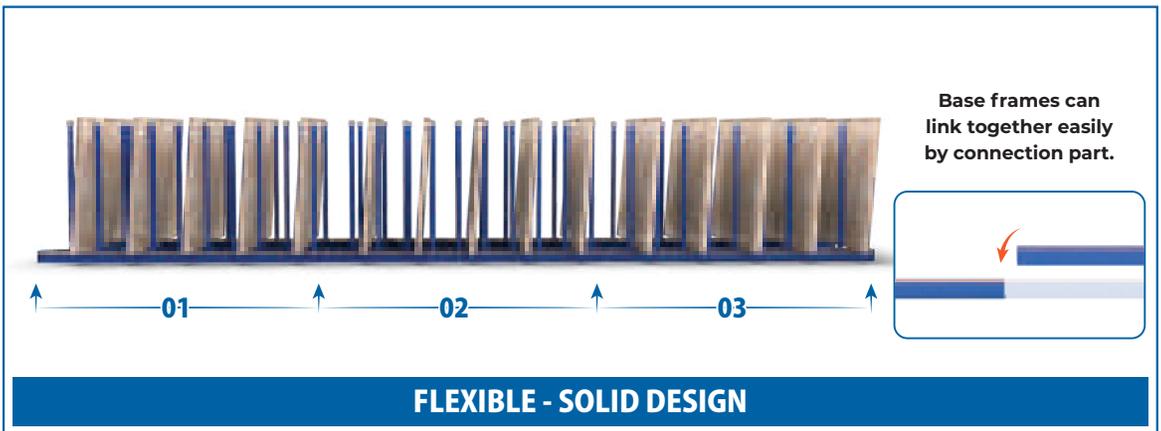

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight Per Pair lbs (kg) | Work Load Limit - lbs (kg) | Poles Number Per Base | Holes Number Per Base |
|---------------------|----------------|---------------|----------------|------------------------------|----------------------------|-----------------------|-----------------------|
| AQUSR010-PRO | 118 ¾ (3016) | 5 ½ (140) | 59 ¾ (1505) | 550 (250) | 5940 (2700) | 10 | 51 |

*** Maximum Weight Load Limit Between Poles**

AUSAVINA REMNANT SLAB RACK

- Remnant Slab Racks are designed to store leftover pieces of stone. It is compact, flexible and adjustable with a sturdy steel structure.

- Each base has 10 poles and 14 or 15 holes to optimize storage efficiency.

The Rack comes with 20 poles.

RES27



RES34



| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight Per Pair lbs (kg) | Work Load Limit - lbs (kg) | Poles Number Per Base | Holes Number Per Base |
|-------|------------------|---------------|----------------|------------------------------|----------------------------|-----------------------|-----------------------|
| RES27 | 118 1/16 (2998) | 4 5/16 (110) | 28 1/16 (712) | 140.8 (64) | 2200 (1000) | 10 | 15 |
| RES34 | 117 15/16 (2996) | 6 5/16 (160) | 35 7/8 (911) | 156.2 (71) | 2200 (1000) | 10 | 14 |

*** Maximum Weight Load Limit Between Poles**



AUSAVINA SPARE POLES

AUSAVINA SLAB RACK POLES - AUSAVINA RHINO SLAB RACK POLES

SRK010-POLE

RSR010-POLE

Poles without rubber

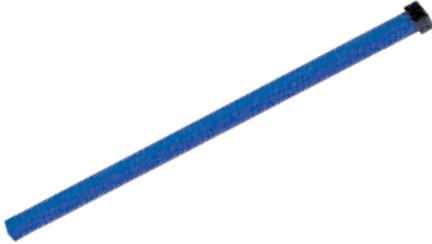


| Dimensions | Capacity ^{1*} |
|---|------------------------|
| 1 15/16" x 1 15/16" x 31 1/2" 50 mm x 50 mm x 800 mm | 12100 lbs (5500 kg) |
| 1 15/16" x 1 15/16" x 47 1/4" 50 mm x 50 mm x 1200 mm | 7700 lbs (3500 kg) |
| 1 15/16" x 1 15/16" x 59 1/16" 50 mm x 50 mm x 1500 mm | 6000 lbs (2727 kg) |
| 1 15/16" x 1 15/16" x 70 7/8" 50 mm x 50 mm x 1800 mm | 4840 lbs (2200 kg) |

AUSAVINA BUNDLE SLAB RACK POLES

BSR010-POLE


Poles without rubber



| Dimensions | Capacity ^{1*} |
|--|------------------------|
| 3 15/16" x 1 15/16" x 59 1/16" 100 mm x 50 mm x 1500 mm | 22000 lbs (10000 kg) |
| 3 15/16" x 1 15/16" x 78 3/4" 100 mm x 50 mm x 2000 mm | 13200 lbs (6000 kg) |

AUSAVINA REMNANT SLAB RACK POLES

RES27-POLE, RES34-POLE



| Dimensions | Capacity ^{1*} |
|--------------------------------------|------------------------|
| 1 1/16" x 27 9/16" 27 mm x 700 mm | 2200 lbs (1000 kg) |
| 1 5/16" x 35 7/16" 34 mm x 900 mm | 2200 lbs (1000 kg) |

1* Maximum Weight Capacity Between Poles


AUSAVINA AIR POLISHING MACHINE

- An air polishing machine is used for polishing the surface of slab edges powered by compressed air.
- The machine can polish slabs at two different angles: 90-degree and 45-degree.
- Compact design and use of air motor shall ensure easy and safe operations.
- Combined with flex polishing pads to help users save effort and time.

APM80M1



APM80M2

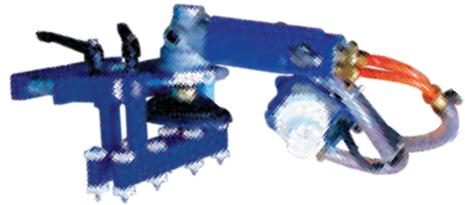

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) |
|---------|-------------------|------------------|-------------------|------------------------|
| APM80M1 | 15 3/8 (390) | 9 3/16 (234) | 8 13/16 (224) | 20.9 (9.5) |
| APM80M2 | 12 3/16 (310) | 7 1/16 (180) | 6 5/8 (169) | 20.9 (9.5) |

| Air Motor | | Water Pump | | |
|---------------|-------------------|------------|----------|---------------|
| Max. pad size | 3 15/16" (100 mm) | Phase | 1 | |
| Max. speed | 4500 (rpm.) | Frequency | 50-60 Hz | |
| Air pressure | 6 ~ 8 bar | Power | USA | INTERNATIONAL |
| Power | 0.43 HP | | 110V/50W | 220V/50W |



AUSAVINA STONE SAW

- Stone Saw (MODS1) features a single phase 3 HP motor or three phase 5 HP motor to cut natural and artificial stones smoothly evenly and precisely. Depend on cutting edges either 90-degree vertical or 45-degree tilt, the operator easily adjusts the saw head in a proper manner. The height of the cutting head block can be adjusted. It is incorporated with wheels and rollers for easy moving. One side bench with rollers and 2 support arms with stops is included.

- Bolted down cast aluminum working tables system enhance safety.

AUSAVINA STONE SAW MODS1



45° cutting



90° cutting

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) |
|--------------|-------------------|------------------|-------------------|------------------------|
| MODS1 | 62 3/8 (1585) | 76 3/4 (1950) | 56 5/8 (1439) | 374 (170) |


| MODS1 - 1P (1 Phase) | Size | | | | Motor Parameter | USA | INTERNATIONAL |
|-------------------------|--------------------|-----------|-------------|--------|------------------|-----------|---------------|
| | Inches | | Millimeters | | | | |
| Blade Diameter | 10 | 11 13/16" | 254 mm | 300 mm | Power | 2 kW | 2.2 kW |
| Cutting Depth At 90° | 1 15/16" | 2 3/8" | 50 mm | 60 mm | Voltage | 110 V | 220 V |
| Cutting Depth At 45° | 1 5/16" | 1 3/16" | 25 mm | 30 mm | Frequency | 60 Hz | 50 Hz |
| Cutting Length | 41 5/16" (1050 mm) | | | | Phases | 1 | 1 |
| | | | | | Speed | 3400 rpm. | 2800 rpm. |
| | | | | | Water Pump Power | 110V/50W | 220V/50W |

| MODS1 - 3P (3 Phase) | Size | | | | | | Motor Parameter | USA | INTERNATIONAL |
|-------------------------|--------------------|-----------|---------|-------------|--------|--------|------------------|-----------|---------------|
| | Inches | | | Millimeters | | | | | |
| Blade Diameter | 10 | 11 13/16" | 13 3/4" | 254 mm | 300 mm | 350 mm | Power | 3.7 kW | 3.7 kW |
| Cutting Depth At 90° | 1 15/16" | 2 3/8" | 3 1/8" | 50 mm | 60 mm | 80 mm | Voltage | 220 V | 380 V |
| Cutting Depth At 45° | 1 5/16" | 1 3/16" | 1 9/16" | 25 mm | 30 mm | 40 mm | Frequency | 60 Hz | 50 Hz |
| Cutting Length | 41 5/16" (1050 mm) | | | | | | Phases | 3 | 3 |
| | | | | | | | Speed | 3400 rpm. | 2800 rpm. |
| | | | | | | | Water Pump Power | 110V/50W | 220V/50W |

- Ausavina Stone Saw MODS2 is an efficient tool for cutting natural and artificial stones smoothly, correctly and perfectly. On one side, the saw has a roller conveyor which makes for easy loading, while on the other side, the adjustable stops make exact parallel cuts. Two side benches with rollers and 2 support arms with stops are included.

- The MODS2 features a single phase 3 HP motor or three - phase 5 HP motor.

AUSAVINA STONE SAW MODS2



| Model | Length In (mm) | | Width In (mm) | | Height In (mm) | | Net Weight lbs (kg) | | |
|-------------------------|--------------------|-----------|------------------|-------------|-------------------|--------|------------------------|-----------|---------------|
| MODS2 | 83 1/16 (2110) | | 82 15/16 (2108) | | 63 7/16 (1612) | | 594 (270) | | |
| MODS2 - 1P (1 Phase) | Size | | | | | | Motor Parameter | USA | INTERNATIONAL |
| | Inches | | | Millimeters | | | | | |
| Blade Diameter | 10 | 11 13/16" | 254 mm | 300 mm | | | 2 kW | 2.2 kW | |
| Cutting Depth At 90° | 1 15/16" | 2 3/8" | 50 mm | 60 mm | | | 110 V | 220 V | |
| Cutting Depth At 45° | 1 5/16" | 1 3/16" | 25 mm | 30 mm | | | 60 Hz | 50 Hz | |
| Cutting Length | 61 1/16" (1550 mm) | | | | | | Phases | 1 | 1 |
| | | | | | | | Speed | 3400 rpm. | 2800 rpm. |
| | | | | | | | Water Pump Power | 110V/50W | 220V/50W |
| MODS2 - 3P (3 Phase) | Size | | | | | | Motor Parameter | USA | INTERNATIONAL |
| | Inches | | | Millimeters | | | | | |
| Blade Diameter | 10 | 11 13/16" | 13 3/4" | 254 mm | 300 mm | 350 mm | Power | 3.7 kW | 3.7 kW |
| Cutting Depth At 90° | 1 15/16" | 2 3/8" | 3 1/8" | 50 mm | 60 mm | 80 mm | Voltage | 220 V | 380 V |
| Cutting Depth At 45° | 1 5/16" | 1 3/16" | 1 9/16" | 25 mm | 30 mm | 40 mm | Frequency | 60 Hz | 50 Hz |
| Cutting Length | 61 1/16" (1550 mm) | | | | | | Phases | 3 | 3 |
| | | | | | | | Speed | 3400 rpm. | 2800 rpm. |
| | | | | | | | Water Pump Power | 110V/50W | 220V/50W |

AUSAVINA RAIL MACHINE 5 IN 1

- Ausavina Rail Machine 5 in 1 is designed for multi-purposes such as cutting and grinding slabs smoothly, correctly and perfectly.
- Several accessories can be flexibly attached to allow 5 main functions.

ARM5-1



The cutting machine excluded

Edge polishing

Cut the edge of a 45° angle

Cut perfectly straight line


Cut glass smoothly with equipped glass cutter

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) |
|--------|-------------------|------------------|-------------------|------------------------|
| ARM5-1 | 78 ¾ (2000) | 7 15/16 (202) | 10 5/16 (262) | 55.66 (25.3) |

| Pneumatic Motor | | Water Pump | |
|-----------------|-----------|------------|--------------|
| Pad size | Ø100 mm | Power | 50W |
| Air pressure | 6 ~ 8 bar | Phase | 1 |
| Rotation speed | 4500 rpm | Voltage | 110V 220V |
| Power | 0.43HP | Frequency | 60Hz 50Hz |

AUSAVINA COLUMN ARTICULATE CRANE (JIB CRANE)


- Operating in confined space and around impediments, this product can provide simple and economical solutions to these difficulties. It can be combined with the Little Giant Lifter, Auto Lock Cable Lifter, Arcturus Lifter, Scissor Clamp and Stone Vacuum Lifter. A simple and convenient structure helps to optimize working time and efficiency.

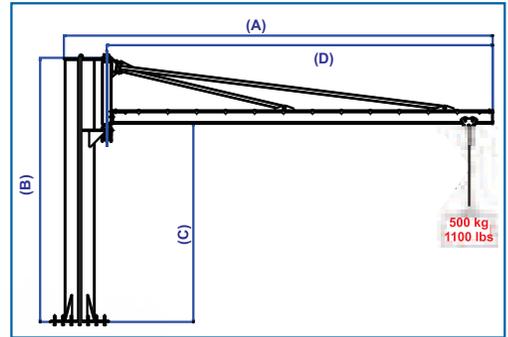

| Model | Length (A) In (mm) | Height (B) In (mm) | Height (C) In (mm) | Net Weight lbs (kg) | Maximum Reach (D) - In (mm) | Rotated Angle | Work Load Limit lbs (kg) |
|-----------------|--------------------------|--------------------------|---------------------------|------------------------|--------------------------------|------------------|-----------------------------|
| CAC50-6M | 262 $\frac{3}{8}$ (6665) | 161 $\frac{5}{8}$ (4105) | 130 $\frac{1}{16}$ (3304) | 4276.8 (1944) | 236 $\frac{1}{4}$ (6000) | 290° | 1100 (500) |

AUSAVINA MORTAR MIXER

- Ausavina Mortar Mixer M2 is designed to mix the materials such as sand, cement, stone, etc. to become a mixture in a short time. Compact and portable design combined with solid wheels provide an easy maneuvering from one place to another, as well as movement through narrow spaces with just one person. This mixer M2 helps improve productivity and reduce labor cost effectively.

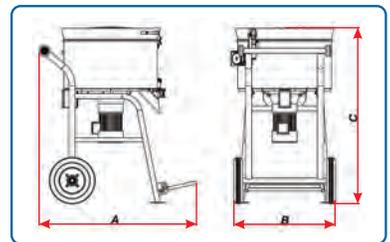


| Model | Length (A) In (mm) | Width (B) In (mm) | Height (C) In (mm) | Net Weight lbs (kg) |
|-----------------|---------------------------|------------------------|--------------------------|------------------------|
| AMX100M2 | 42 $\frac{15}{16}$ (1091) | 27 $\frac{5}{8}$ (702) | 47 $\frac{5}{16}$ (1202) | 303.6 (138) |

| Motor Parameters | | The average mixing time: 3 minutes With overload protection devices | |
|------------------|------------|--|------------------------|
| Horse power | 2 HP | Barrel capacity - Gallon (Liters) | 26 (100) |
| Voltage | 220V /110V | Barrel diameter - Inches (mm) | 25 $\frac{1}{2}$ (648) |
| Frequency | 50 Hz/60Hz | Speed (rpm) | 29 |
| Phase | 1 | | |


AUSAVINA DEHYDRATOR (SLUDGE FILTER)

- Ausavina Dehydrator (Sludge Filter) is a filtration system for the fast collection and trapping of the abrasive sludge produced by machining and finishing marble, granite and other stones.
- Dehydrator (Sludge Filter) is an economical one step method in separating and dewatering sludge and slurries.
- Dehydrator is constructed of Stainless Steel and consists of four basic components: pump, mud holding tank, filter bags and filtered water pan.
- Dehydrator (Sludge Filter) has no moving parts and requires minimal maintenance.

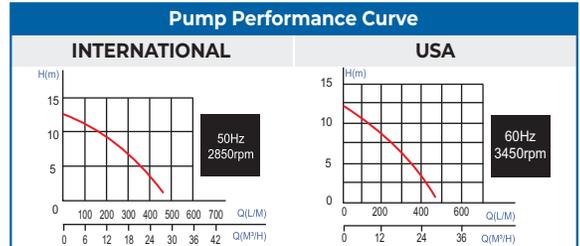

L/M: Liter/Min M³/H: Meter/hour M: Meter H: Height Q: Flow Rate

| Model | Length In (mm) | Width In (mm) | Height In (mm) |
|---|---|---------------------------------------|---------------------------------------|
| ADE089 | 95 ¹³ / ₁₆ (2433) | 27 ⁹ / ₁₆ (700) | 91 ³ / ₄ (2330) |
| Net Weight - lbs (kg) | 468.6 (213) | | |
| Float Switch | Automatic | | |
| Bag Dimension | 13 ³ / ₄ x 47 ³ / ₄ " (350 x 1200 mm) | | |
| Material | Stainless Steel | | |
| Valves | 2 Inch BSP Brass Nickel Plated | | |
| Filter Capacity 25 % Sludge In The Water | 3m ³ / 1 hour | | |

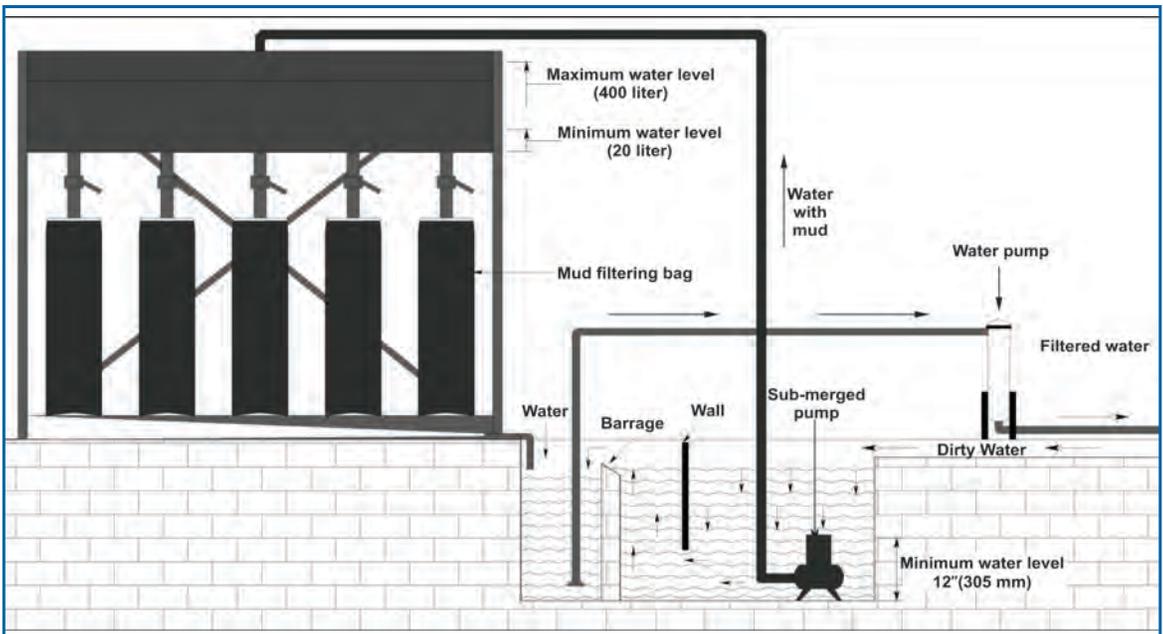

AUSAVINA COLLAPSIBLE DUMPSTER (TILT DUMPSTER)

- A "must have" item for your workplace. Practical to use and effective to keep your environment clean.
- Built of steel and heavy gauge sheets for last long.
- Tilting is by handy lever for safe use.
- Forklift engagement by heavy duty channel pockets with safety pin when at full load.
- Has 4 heavy duty casters for easy moving, two with brake to lock the dumpster steady to the ground when needed.

CD70



CD102




| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Volume ft ³ (m ³) | Work Load Limit lbs (kg) |
|--------------|-------------------|------------------|-------------------|------------------------|---|-----------------------------|
| CD70 | 59 5/16 (1506) | 47 7/8 (1216) | 40 9/16 (1030) | 534.6 (243) | 25 (0.705) | 2640 (1200) |
| CD102 | 63 3/4 (1620) | 50 15/16 (1295) | 45 7/16 (1154) | 719.4 (327) | 35.4 (1) | 3300 (1500) |

AUSAVINA DROP BOTTOM DUMPSTER

- Ausavina Drop Bottom Dumpster is a useful solution to keep your area neat and clean.
- The bottom gate opening system allows you to dump the waste in a second.
- When the dumpster touches the ground, the tail gates close automatically.
- The unit can be lifted either by a hoist or forklift.
- The Dumpster construction allows to separate each component, side and bottom for easy packing and transporting to another place if necessary.

DBD100

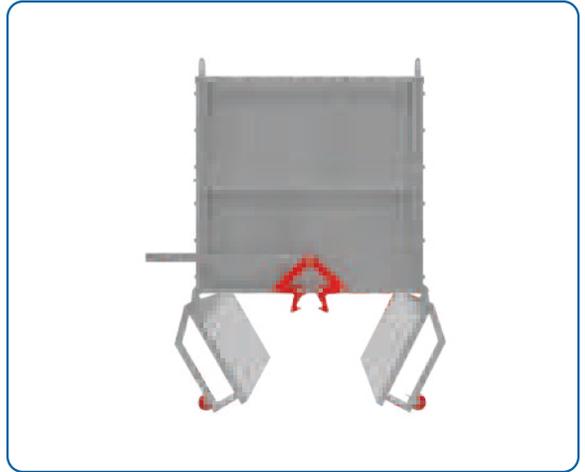


DBD150



| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Volume ft ³ (m ³) | Work Load Limit lbs (kg) |
|---------------|---|---------------------------------------|--|------------------------|---|-----------------------------|
| DBD100 | 51 ³ / ₈ (1305) | 45 ¹ / ₄ (1150) | 50 ³ / ₁₆ (1271) | 442.2 (201) | 35.4 (1) | 3300 (1500) |
| DBD150 | 64 ¹⁵ / ₁₆ (1650) | 51 ³ / ₈ (1305) | 50 ³ / ₁₆ (1271) | 583 (265) | 53 (1.5) | 4400 (2000) |

AUSAVINA SLUDGE DEHYDRATOR MACHINE

- Designed to separate sludge from water and purify rock debris when polishing, cutting,...
- ASDM114 is an effective solution to protect the environment.
- Easy and quick to assemble and disassemble.

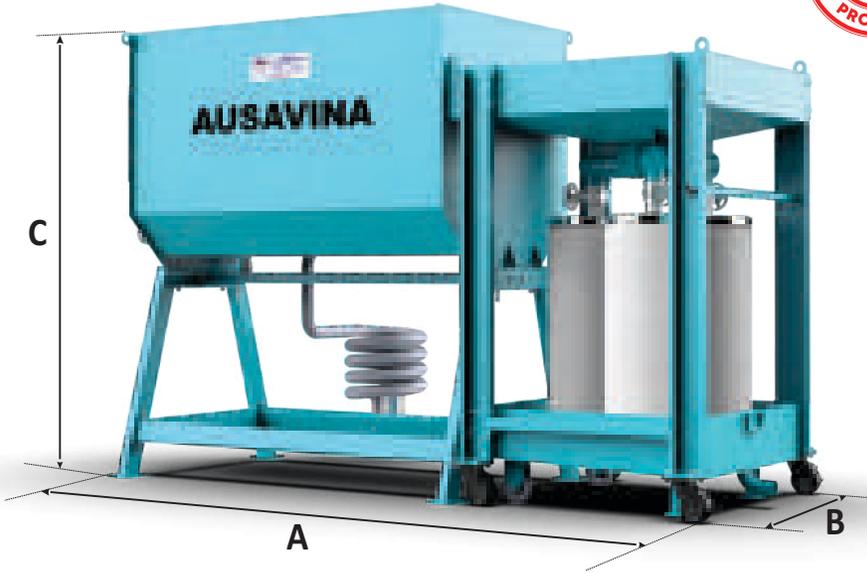

ECO-FRIENDLY

Minimize smell and noise, smooth discharging and stable operation.



AUTOMATIC PUMP SYSTEM

Automatically pump sludge water into the tank whenever it completely flows into the filter system to save time and increase productivity.



CONVENIENT
The water tray with casters is removable for easy cleaning.

HIGH- EFFECTIVE


Bag filter able to keep and separate sludge seed size larger than 80 micrometers out of water.

| Model | Length (A) In (mm) | Width (B) In (mm) | Height (C) In (mm) | Net Weight lbs (kg) | Maximum Filter Capacity | Power Requirement 3 phase |
|---------|-----------------------|----------------------|-----------------------|------------------------|----------------------------|------------------------------|
| ASDM114 | 108 1/16 (2757) | 38 15/16 (990) | 66 7/8 (1699) | 913 (415) | 8 m ³ /h | 220V/60hz 380V/50hz |

AUSAVINA EZ-PRO LEVEL EXTENDER



- Ausavina EZ-Pro Level Extender is especially made for accurate precision support when wall paneling tiles detached from ground. Shafts are made of stainless steel and bar is made of aluminum to be lightweight and durable.

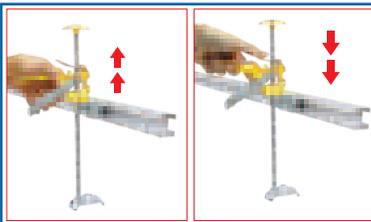

Simple to adjust vertical level handles




Aluminum bar supports the tiles during paneling process

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|----------|----------------|---------------|----------------|---------------------|--------------------------|
| AELE7811 | 78 ¾ (2000) | 8 ½ (206) | 15 ⅞ (403) | 7.04 (3.2) | 308 (140) |

AUSAVINA BUNDLE SECURING BAR

- ABSB180 is designed to enhance safety during moving bundle slabs when combined with clamp devices. It's a smart tool to increase productivity. Simple design, easy-to-use, lightweight and fast operation. The two ends of the Bundle Securing Bar are covered by rubbers to protect the slabs against chipping and scratching.

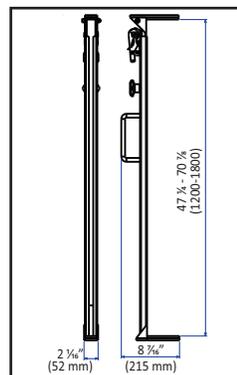

| | |
|---------------------|-------------------------|
| Model | ABSB180 |
| Length In (mm) | 47 ¼ ~ 70 ⅞ (1200~1800) |
| Width In (mm) | 2 ½ (52) |
| Height In (mm) | 8 ⅞ (215) |
| Net Weight lbs (kg) | 25.3 (11.5) Per Pair |

AUSAVINA DRILLING GUIDE M2

DGM2

- Drilling Guide is specifically developed to drill slabs quickly, exactly and securely.
- Made of aluminum for lightweight and easy-to-drill desired positions.
- Two suction cups hold slabs firmly to avoid wobbling during drilling operations.
- The drill holder and head can slide up & down smoothly and precisely for a properly defined location drilled.

Note *Drill is not included.*




AUSAVINA DRILLING GUIDE M3

DGM3

- Drilling Guide is specifically developed to drill granite slabs quickly, exactly and securely.
- The three suction cups are designed to secure DGM3 firmly on a slab to prevent from moving or shaking.
- Drilling guide body is made of aluminum for lightweight and easy to use.
- Firm and accurate drilling jig enables higher capacity for effective operations.

Note *Drill is not included.*

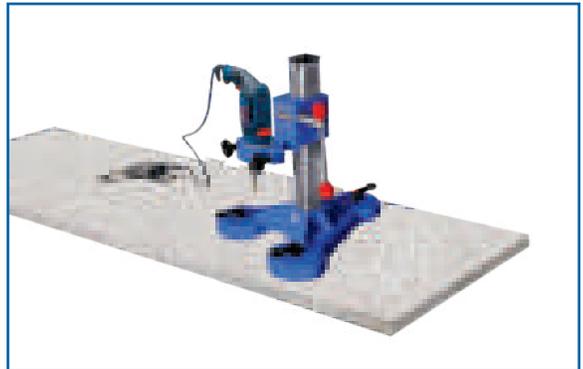


| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Drill Fitting Diameter With And Without Collar - In (mm) |
|-------|-------------------|------------------|-------------------|------------------------|---|
| DGM2 | 20 1/2 (520) | 8 7/8 (225) | 16 1/8 (407) | 15.4 (7) | 1 11/16 - 2 1/16 (43 - 53) |
| DGM3 | 15 9/16 (395) | 15 15/16 (406) | 15 13/16 (402) | 17.6 (8) | 1 11/16 - 2 3/16 (43 - 53) |

AUSAVINA MULTI SLAB SAFEGUARD SLING



- Multi Slab Safeguard Sling is combined with lifters to transport many slabs at the same time.
- The rubber pads on the clamp plates increase the gripping force and keep the material from damaging and scratching.
- The device is designed with protection features to ensure safety and productivity.




AMSS160




AMSS85



ABL150A




AFL65A



ASVL50A-M2

COMBINED WITH MANY DIFFERENT LIFTER MODELS



SIMPLE DESIGN - SAFE - EASY TO USE


| Model | Length - In (mm) | Width - In (mm) | Height - In (mm) | Net Weight - lbs (kg) |
|----------------|------------------|-----------------|------------------|-----------------------|
| AMSS85 | 6 7/8 (175) | 7 7/8 (200) | 6 13/16 (173) | 6.6 (3) |
| AMSS160 | 9 13/16 (250) | 7 7/8 (200) | 6 13/16 (173) | 7.7 (3.5) |

| Model | Grip Range - In (mm) | Applicable Lifter Models |
|----------------|---------------------------|---|
| AMSS85 | 9/16 - 3 3/8 (15 - 85) | ALG, AFL65, AFL65A, ASL30A, ASVL, APL20, APL20-M2 |
| AMSS160 | 15/16 - 6 5/16 (25 - 160) | ABL150, ABL150A |

AUSAVINA SAFETY CORNER SLAB RACK WEDGE

- Made out of high-quality plastic, the unique tool to use along with a variety ranges of slab racks for high safety. Compact design for easy carry or storage.

ASCSRW



Easy to lean the stone slabs onto the rack within a safe angle during operation without observation.



| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Type of Pole in (mm) |
|------------|---|-------------------------------------|--------------------------------------|---------------------|--|
| ASCSRW5.5 | 7 ¹³ / ₁₆ (198.5) | 3 ⁹ / ₁₆ (90) | 7 ⁵ / ₁₆ (186) | 0.68 (0.31) | 1 ¹⁵ / ₁₆ - 1 ¹⁵ / ₁₆ (50 - 50) |
| ASCSRW4.8 | 8 ¹⁵ / ₁₆ (228) | 3 ⁹ / ₁₆ (90) | 7 ⁵ / ₁₆ (186) | 0.72 (0.33) | 1 ⁹ / ₁₆ - 3 ¹ / ₈ (40 - 80) |
| ASCSRW5.10 | 9 ¹³ / ₁₆ (248.5) | 3 ⁹ / ₁₆ (90) | 7 ⁵ / ₁₆ (186) | 0.75 (0.34) | 1 ¹⁵ / ₁₆ - 3 ¹⁵ / ₁₆ (50 - 100) |

AUSAVINA SLAB WEDGE



- Very useful handy tool to keep little gaps between slab edges. Avoid damage and enhance safety.




| Model | Length - In (mm) | Width - In (mm) | Height - In (mm) | Net Weight - lbs (kg) |
|-------|-------------------------------------|------------------------------------|---------------------------------------|-----------------------|
| SW63 | 4 ³ / ₄ (120) | 2 ¹ / ₂ (63) | 10 ³ / ₁₆ (255) | 0.88 (0.4) |


AUSAVINA SWIVEL HOOK

- These Hooks are included in some Ausavina lifter models. Connect Ausavina lifters and / or booms to allow 360° slab rotation.



ASH52.40

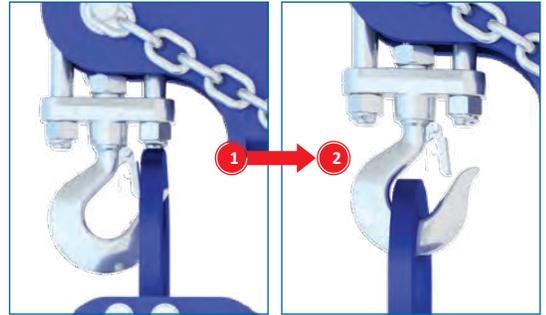

ASH37.45

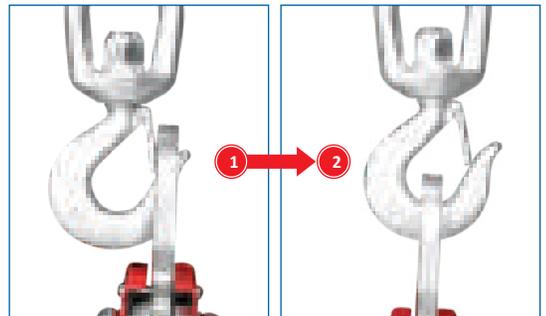


ASH81.57

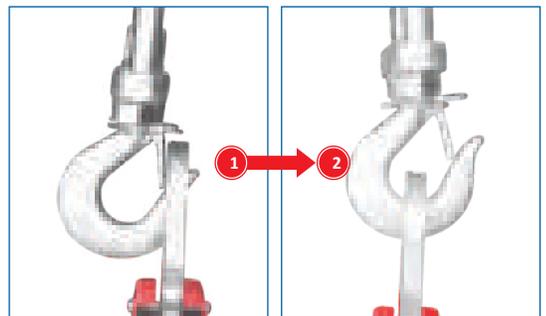

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Net Weight lbs (kg) | Work Load Limit lbs (kg) |
|----------|-------------------|------------------|-------------------|------------------------|-----------------------------|
| ASH52.40 | 3 1/8 (79) | 1 (25) | 7 5/16 (186) | 1.76 (0.8) | 2200 (1000) |
| ASH37.45 | 4 1/16 (103) | 1 7/8 (47) | 8 9/16 (218) | 4.18 (1.9) | 4400 (2000) |
| ASH81.57 | 4 13/16 (119) | 1 5/8 (41) | 11 7/16 (290) | 6.6 (3) | 4400 (2000) |

AUSAVINA SWIVEL SHACKLE


- These Shackles are included in some Ausavina lifter models. Connect Ausavina lifters and / or booms to allow 360° slab rotation.



SWS1500



SWS2500

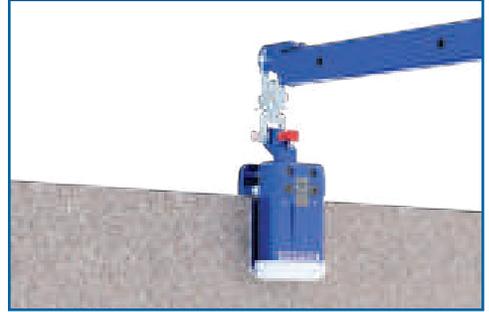

| Model | Length In (mm) | Width In (mm) | Height In (mm) | Loading Capacity lbs (kg) | Net Weight lbs (kg) |
|----------------|-------------------|------------------|-------------------|------------------------------|------------------------|
| SWS1500 | 4 ½ (115) | 1 ¼ (32) | 7 13/16 (199) | 3300 (1500) | 3.1 (1.4) |
| SWS2500 | 5 ¼ (133) | 1 5/8 (42) | 11 ¼ (286) | 5500 (2500) | 6.6 (3) |

AUSAVINA CABLE CONNECT SLING

- Cable Connect Sling extends lifting room when headroom is not an issue. Connects Ausavina lifters and / or booms.



| Model | Length In (mm) | Width In (mm) | Height In (mm) | Cable diameter In (mm) | Net Weight lbs (kg) | Loading Capacity lbs (kg) |
|---------------|-------------------|------------------|-------------------|---------------------------|------------------------|------------------------------|
| ASL017 | 16 13/16 (427) | 3 3/8 (85) | 3/4 (19) | 3/8 (10) | 2.64 (1.2) | 3300 (1500) |

AUSAVINA BOW SHACKLE

- Ausavina Bow Shackle is a tool for straight lifts where no rotation is needed. Connects any Ausavina lifter, boom, scissor clamp.



| | |
|-----------------------------|---------------------------------------|
| Model | ABS22 |
| Length - In (mm) | 5 ¹¹ / ₁₆ (144) |
| Width - In (mm) | 1 ⁵ / ₈ (41) |
| Height - In (mm) | 5 ⁵ / ₈ (143) |
| Net Weight - lbs (kg) | 2.64 (1.2) |
| Loading Capacity - lbs (kg) | 3300 (1500) |

AUSAVINA STONEMASON SLEEVES

SOLD IN PAIRS



- Ausavina Stonemason Sleeves fit snugly around the wrist and upper sleeve area to prevent clothes from getting soaked during wet grinding.

| | |
|-----------------------|---------------------------------------|
| Model | SMS019 |
| Width - In (mm) | 19 ⁵ / ₁₆ (490) |
| Height - In (mm) | 6 ¹ / ₂ (165) |
| Net Weight - lbs (kg) | 0.352 (0.16) |

Customizable with any Company logo.

AUSAVINA STONE MASON APRON

A HEAVY DUTY APRON FOR ALL STONEMASONS.

- The quick snap straps are ideal for a quick and easy fit.
- Made of a double layer of the highest quality material for extra protection.
- Compact design, many compartments to store tools.
- Customizable with any Company logo.



| | | | |
|---------------|---------------------------------------|---------------------------------------|-----------------------|
| Model | Width - In (mm) | Height - In (mm) | Net Weight - lbs (kg) |
| SMA048 | 35 ⁷ / ₁₆ (900) | 47 ¹ / ₄ (1200) | 1.32 (0.6) |

EUROPE

| | | | | | | | | | | |
|--|--|---|--|---|---|--|---|--|--|---|
|  Austria |  Belarus |  Bulgaria |  Croatia |  Czech Republic |  Denmark |  Estonia |  France |  Germany |  Greece | |
|  Hungary |  Iceland |  Ireland |  Isle of Man |  Italy |  Latvia |  Lithuania |  Macedonia |  Malta |  Moldova, Republic of | |
|  Netherlands |  Norway |  Poland |  Portugal |  Romania |  Russian Federation |  Slovakia |  Slovenia |  Spain |  Sweden | |
|  Switzerland |  Ukraine |  United Kingdom |  Albania |  Belgium |  Bosnia and Herzegovina |  Gibraltar |  Luxembourg |  San Marino |  Serbia and Montenegro |  Svalbard and Jan Mayen |

OCEANIA

| | |
|---|--|
|  Australia |  Fiji |
|  French Polynesia |  New Caledonia |
|  New Zealand | |

AMERICAS

| | | | | | | | |
|--|--|--|--|---|--|---|---|
|  Argentina |  Brazil |  Canada |  Colombia |  Chile |  Ecuador |  El Salvador |  Guadeloupe |
|  Mexico |  Panama |  Puerto Rico |  United States |  Bolivia |  Dominica |  Dominican Republic |  Guatemala |
|  Guyana |  Honduras |  Jamaica |  Peru |  Saint Kitts and Nevis |  Trinidad and Tobago |  Uruguay |  Venezuela |

AFRICA

| | | | | | | | | |
|---|--|--|--|---|--|--|--|---|
|  Egypt |  Kenya |  Mauritius |  Nigeria |  South Africa |  Zimbabwe |  Algeria |  Ghana |  Libyan Arab Jamahiriya |
|  Madagascar |  Morocco |  Namibia |  Senegal |  Seychelles |  Swaziland |  Togo |  Tunisia |  Zambia |

ASIA

| | | | | | | | | | | |
|---|--|---|---|---|---|--|--|--|---|---|
|  Bahrain |  Brunei Darussalam |  Cambodia |  Cyprus |  China |  Georgia |  Hong Kong |  India |  Indonesia |  Israel | |
|  Japan |  Jordan |  Kazakhstan |  Korea, Republic of |  Laos |  Malaysia |  Palestinian Territory, Occupied |  Philippines |  Qatar |  Saudi Arabia | |
|  Singapore |  Turkey |  Thailand |  United Arab Emirates |  Vietnam |  Armenia |  Bangladesh |  Bhutan |  Iran, Islamic Republic Of |  Iraq | |
|  Kuwait |  Lebanon |  Macao |  Maldives |  Mongolia |  Myanmar |  Oman |  Pakistan |  Sri Lanka |  Taiwan |  Uzbekistan |



AUSAVINA JSC

MATERIAL HANDLING SOLUTIONS



Contact us:

Address: No. 944/1 Nguyen Thi Minh Khai Street,
Tan Thang Quarter, Tan Dong Hiep Ward,
Ho Chi Minh City, Vietnam.

Tel: (+84) 902 505 544
Office: (+84) 274 373 9448
Email: sales@ausavina.com



Scan QR Website